



xComfort Compact Distribution Boxes - Home game for a safe electrical installation system

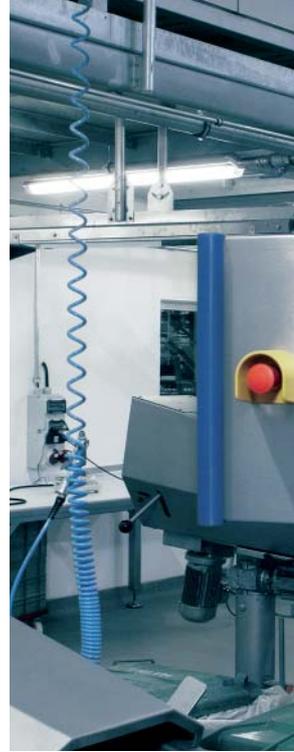

EATON

Powering Business Worldwide

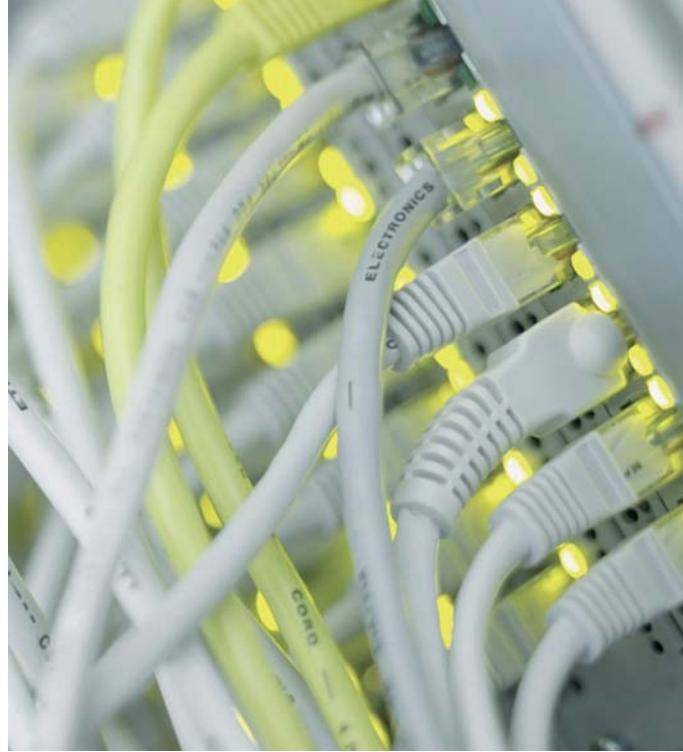

Powering electrical systems worldwide

Buildings

- Residential
- Healthcare
- Education
- Commercial offices
- Retail
- Public sector
- Airports

- Electrical distribution solutions for safe and efficient power delivery
- Power quality systems for uptime and reliability
- Power metering and monitoring to add intelligence and save costs
- Industrial control products for HVAC applications

Information Technology

- Data centers
- Telecommunication
- Networks
- Computer rooms

- World's most efficient line of UPSs to reduce footprint and save energy
- Reliable power systems with inherent redundancy to improve availability
- Power metering and monitoring to diagnose problems and lower costs
- Local service and support for quick response



Public and private sectors

Buildings, Information Technology, Industrial & Machinery, Energy & Utilities
We provide reliable, efficient and safe power management.

Industrial & Machinery

- Manufacturing
 - Agriculture
 - Construction
 - Mining and metals
 - Processing:
 - Petrochemicals
 - Pharmaceuticals
 - Pulp and paper
 - Material handling
-
- Electrical distribution equipment to deliver power throughout the enterprise
 - Control & automation and power quality equipment for process control
 - Power metering and monitoring to manage energy costs and uptime
 - Power and motion control products to optimize productivity, reliability, safety and operator comfort

Energy & Utilities

- Renewable energy:
 - Solar
 - Wind
 - Hydropower
 - Traditional energy:
 - Oil
 - Gas
 - Smart grid
 - Water and waste water
-
- Electrical balance of system and turnkey services for residential, utility and commercial solar installations
 - Power distribution equipment, control components and system installations services
 - Network power grid technology for intelligent data, lower costs and crew/public safety



Yesterday, the future was yet to come. Today, it's already here.

The future has already begun.

For us, innovation is tradition: in 1957 Eaton's Moeller segment developed the first fault current protection switch, and with this, a new era of electrical safety engineering began. And now, Eaton is still ahead of its time: the new digital switchgear range in the Eaton xEffect series communicates potential problems in advance and sets new standards in precision, security and convenient service.

Maximal safety with optimal ease

Modern Residual Current Circuit Breakers (RCCB) protect people and technical equipment conveniently and reliably against faulty currents. The digital RCCB from the xEffect series do more than just switch off. They monitor electrical installations and give advance warning of critical current flows. So plant / factory shutdowns – and the resulting costs – can be avoided.

Precise Release – Highest Reliability

Short-time fault currents or other briefly occurring malfunctions do not cause the digital protection switch to shut down, thanks to the short time delay and optimized tripping threshold. So the electrical installation is optimally protected against nuisance tripping.

Easy and adaptable installation for fast modernization

The big Eaton Plus: It is very easy to upgrade a switchboard! Simply replace the RCCB – and you have all advantages of digitalization.

xComfort Compact Distribution Boxes

Micro Compact distribution boxes



The smallest distribution board of this product family fascinates the user especially with its extremely fast way of attaching the device cover which automatically snaps into position thanks to an innovative locking mechanism. So screwing down or unscrewing the device cover is no longer necessary at all. For up to 2 or 4 module units

Benefit:

- Time-saving thanks to the extremely fast way of attaching the device cover using an innovative locking mechanism.

Features:

- Degree of protection IP30 (IK05)
- Surface-mounted
- Protection class II, totally insulated
- 1-row, 2 and 4 module units
- No tools required for enclosure assembly
- Support rail made of plastic
- Enclosure made of high-quality ABS plastic
- No window
- Glow wire test 650°C
- Pre-punched metric areas for cable entry all around
- Body RAL 9003
- Possibility of direct fixing on the wall, no need to drill holes into the enclosure

Mini Compact distribution boxes



It is the diversity of this member of the family that makes it so outstanding. An overall sufficient number of articles can be ordered to meet all the requirements of real life situations, from 2 to 6 module units, with or without a window, with or without connection terminals, and with a top-hung window as an option for retrofitting.

Benefit:

- Due to its diversity, it is the ideal solution for any application – available with or without connection terminals and with a top-hung window suitable for retrofitting.

Features:

- Degree of protection IP30 or IP20 (IK05)
- Surface-mounted
- Protection class II, totally insulated
- 1-row, 2, 3, 4, 5 and 6 TE
- Support rail made of plastic
- Enclosure made of high-quality ABS plastic
- Either with or without a window
- Window lead-sealable
- Glow wire test 650°C
- Pre-punched metric areas for cable entry all around
- Body RAL 9003
- Possibility of direct fixing on the wall, no need to drill holes into the enclosure

ECO Compact distribution boxes



Both as a surface-mounted and flush-mounted compact distribution board, this product series made of plastic attracts the customers' attention above all through its slim design and its interesting price/performance ratio. Truly classic products are its 12-module-unit versions which are usually used in hotel projects.

Benefit:

- Attractive price-performance ratio
- Slim design

Features:

- Degree of protection IP40
- Surface mounted / flush: 1-row, 5, 8, 12 and 18 module units
- Surface mounted / flush: 2-rows, 24 and 36 module units
- Surface mounted / flush: 3-rows, 36 module units
- Surface-mounted: 3-rows, 54 module units
- Protection class II
- Glow wire test 850°C

xComfort Compact Distribution Boxes

KLV Compact distribution boxes



The second generation of the successful KLV compact distribution board series provides even more flexibility. The product family has now been complemented by new flush-mounted and hollow-wall distribution boards as well as by expandable KSK combined plug-type terminals included as standard. Additional cable holders allow for neat wiring. The stable device cover offers optimal protection for the operator, which is especially important for the large 4-row version. The highlight is the new 3D plaster compensation which not only provides for corrective compensation in X and Y direction, but also for depth compensation for up to 18mm over the entire door frame. So any differences in the wall surface can be compensated in a time-saving way and without any additional parts thanks to this new standard feature. Another characteristic aspect is the version with a unique, super-flat door frame design which makes the compact installation distribution board almost invisible. The new offer is completed by integrated marking slots in the wall pan, a bubble level for fast alignment, 90° quick-acting closures at the device cover and many new accessories offered as options to add even more value. Thanks to its certification as a compact installation distribution board according to IEC/EN 60670-24 as well as to EN 62208, the KLV compact distribution board is the first choice for both small and large projects.

Projects - form of delivery 4PR

The second generation of the KLV compact distribution board series is also offered as a new project delivery form 4PR, which includes both the one-level and the two-level package.

While the one-level package represents the standard configuration including the wall pan, the two-level package optionally includes the doors/frames in the required RAL colour or with ventilation slots. So large projects, for example, can be executed using standard finishes or individually selected colour options.



Benefit:

- Clearly structured wiring thanks to additional cable holders
- Optimal protection for the operator thanks to the stable device cover
- Easy and time-saving to mount thanks to
 - 3D plaster compensation
 - Integrated marking slots
 - Bubble level for fast alignment, and quick-acting closures at the device cover

Features:

- Degree of protection IP30
- 1 to 4 rows, 12 module units and 2 spare MUs in each row
- Multimedia variants
- Hollow-wall and flush-mounted versions
- Flat and super flat door design
- Integrated spirit level
- 3D plaster compensation
- Terminals for neutral and protective conductors
- N-FI expansion terminal (FI = RCD = Residual Current Device)
- Pre-punched cable entries on all sides
- Protection class II, fully insulated
- Door and cover frame, sheet steel RAL 9016
- Low halogen level

xComfort Compact Distribution Boxes

KLV Multimedia DBs



The second generation of the KLV compact distribution board series now has a new family member – the multi-media distribution board. Equipped with the same enclosure features as the energy KLV distribution board, the multi-media distribution board meets the requirements of the new IEC/EN 60670-24 directive for multi-media applications in GP standard. Its high-quality basic equipment includes a carrier rail for patch modules, a micro-perforated mounting plate, device holders and a double power-socket, and it is completed by connection brackets for interlinking the wall pans in pairs.

KLV multi-media distribution boards are available in a normal-flat (F) as well as in a unique super-flat (SF) version. The doors come with ventilation systems for improved heat exchange. Like the energy distribution board, the multi-media KLV compact distribution board also includes the 3D plaster compensation in its scope of delivery.

Benefit:

- Same equipment as the KLV compact distribution board
- High-quality basic equipment with a carrier rail for patch modules, a micro-perforated mounting plate, device holders and a double power-socket
- Improved heat exchange thanks to doors equipped with ventilation systems

Features:

- Degree of protection IP30
- 3 to 4 rows
- Hollow-wall and flush-mounted versions
- Flat and super flat door design
- Integrated spirit level
- 3D plaster compensation
- Top row carrier rail
- Micro-perforated mounting plate
- Cable holder
- Device holder
- 2-fold electricity socket
- Pre-punched cable entries, on all sides
- Protection class II, fully insulated
- Door and cover frame, sheet steel RAL 9016
- Low halogen level
- IEC/EN 60670-24

xComfort Compact Distribution Boxes

IKA Surface-mounted compact distribution boxes, IP65



The easy-to-mount PE/N terminal rails, fixing possibilities directly at the wall without having to drill holes into the enclosure, and the spacious distance of 150 mm between the terminal rails allow you to install the IKA distribution board in an extremely convenient and fast way. Changing the door hinges can be done within seconds, without having to remove the cover or any other parts of the enclosure. Height-adjustable, stable device carrier rails and pre-punched holes for cable entries with a centration point are just a few of the many highly appreciated features, and the possibility of lead-sealing the enclosure cover and door comes as a standard feature as well, all without the need for any additional parts.

Highlights are the large wiring area under the carrier rail of 46 mm, the integrated module compensation in the cover used to compensate the different widths of the devices, and the possibility of installing additional functional units in the bottom panel of the enclosure.

Safe – thanks to the high degree of protection IP65, the foamed all-round sealing and the robust, halogen-free construction design of the door and body, safe operation with the IKA industrial distribution board made of polycarbonate can be guaranteed even in harsh industrial environments. More flexibility – thanks to 9 sizes with 4, 6 and 8 module units as well as with 12, 24, 36 or even with 18, 36 and 54 module units, you will find the optimal distribution board solution for any application and situation.

As the IKA surface-mounted compact distribution board meets the requirements of the EN 62208 and IEC/EN 60670-24 standards, it is the first choice for large projects according to IEC/EN 61439 as well as for small projects.

Benefit:

- Quick and easy to install thanks to the easy-to-mount PE/N terminal rail, fixing possibilities directly at the wall without having to drill holes into the enclosure and a spacious distance between the rails
- Reversing the door hinges can be done within seconds
- Pre-punched holes for cable insertions with a centration point
- Lead-sealing of enclosure cover and door does not require any additional parts

Features:

- Degree of protection IP65
- Protection class II, fully insulated
- Industrial version (PC) or PRO/Standard version (ABS)
- 1 to 3 rows, 12 and 18 module units
- Mini module with 4, 6 and 8 MU
- Glow wire test 850°C or 650°C
- CNC foamed sealing
- Fully removable DIN support rack
- Up to 46 mm wiring area under the DIN rail
- Module tolerance compensation in the cover
- Depth-adjustable DIN rail
- Neutral and protective conductor terminals
- Intuitive locking and unlocking of the door
- Body RAL 7035, door transparent
- Halogen-free

xComfort Compact Distribution Boxes

BF Flat distribution boxes, IP30



The BF series of Eaton's flat distribution boards makes a great visual impact thanks to its straight-forward and flat design. The installation distribution board is available in a surface-mounted as well as in a flush-mounted/hollow-wall version. There is a wide range of colours, device rows, module units and cable insertion options to choose from. The rack with the carrier rails can be completely removed and offers a convenient distance of 150 mm between the rows.

PE/N terminal rows as well as electric-shock protected installation sections with contact points at the metal front plates due to a special type of closure are included. The BF distribution board is made of solid, powder-coated steel sheet and is classified as protection class 1. As this flat distribution board meets the requirements of the 62208 as well as the IEC/EN 61439-1 and -3 standards, it is the right choice for a sub-distribution board up to 160A in a wide range of projects.

Benefit:

- Easy mounting of the components thanks to a convenient distance between the rows and the possibility to remove the carrier rails
- Increased safety thanks to electric-shock protected installation sections

Features:

- Degree of protection IP30
- Surface-mounted- or Flush-mounted Flat Distribution Boards
- 2- to 6-rows 24MU/row (Versions A, E, C)
- 4- to 6-rows 33MU/row (Versions A, C, P)
- Protection class I
- Sheet steel enclosure polyester powder coated (white RAL 9016; Version C also in grey RAL 7035)
- Prepared for Eaton MCCB Incoms
- Sheet steel front plates with contacting to the enclosure
- Removable DIN-rail frame
- Generous wiring space
- 150 mm DIN-rail distance (ideal for switchgear busbar system)
- Complete enclosure (including N/PE-terminals)
- Depth: 127 mm
- Universal mounting plate

EWK section distribution boxes, IP43



The next generation of the well-proven EWK surface-mounted field distribution board featuring a depth of 160 mm is outstanding thanks to its improved installation sections. Large-area shock-protection covers made of plastic which can be closed without the need for any tools, torsion-resistant carrier rails of 35x15 mm and the new combined plug-type terminals complete the list of its features. Traditional virtues such as the 2K membrane flanges at the top and bottom, 110° door opening angle, lead-sealable rotary bolt and 3-point rod lock for enclosures with double-wing doors will be continued with this latest generation as well. Thanks to its classification as protection class 2 and its certification according to standard 61439-3 up to 125A, the EWK surface-mounted field distribution board is above all used in public buildings.

Benefit:


- Improved safety thanks to the large-area electric-shock protection cover
- Compactness thanks to torsion-resistant carrier rails
- Easy to mount thanks to the large wiring area behind the DIN rail

Features:

- Degree of protection IP43, IK09
- Protection class II, fully insulated
- 160 mm enclosure depth
- Complete with door and installation field for add-on devices
- Combined plug-type terminals for neutral and protective conductor
- Device cover with quick-acting closure
- 36 to 288 module units, 3 to 6 rows
- 16 different enclosure sizes
- Design with either one or two doors
- Larger enclosures with 3-point rod lock
- DIN carrier structure is fully withdrawable
- Stable and torsion-resistant DIN rail
- Possibility for direct fixing on the wall
- Quick and easy inversion of the door hinges
- 2K membrane flanges
- Body RAL 9016, door of non-transparent sheet steel

xComfort Compact Distribution Boxes

Applications

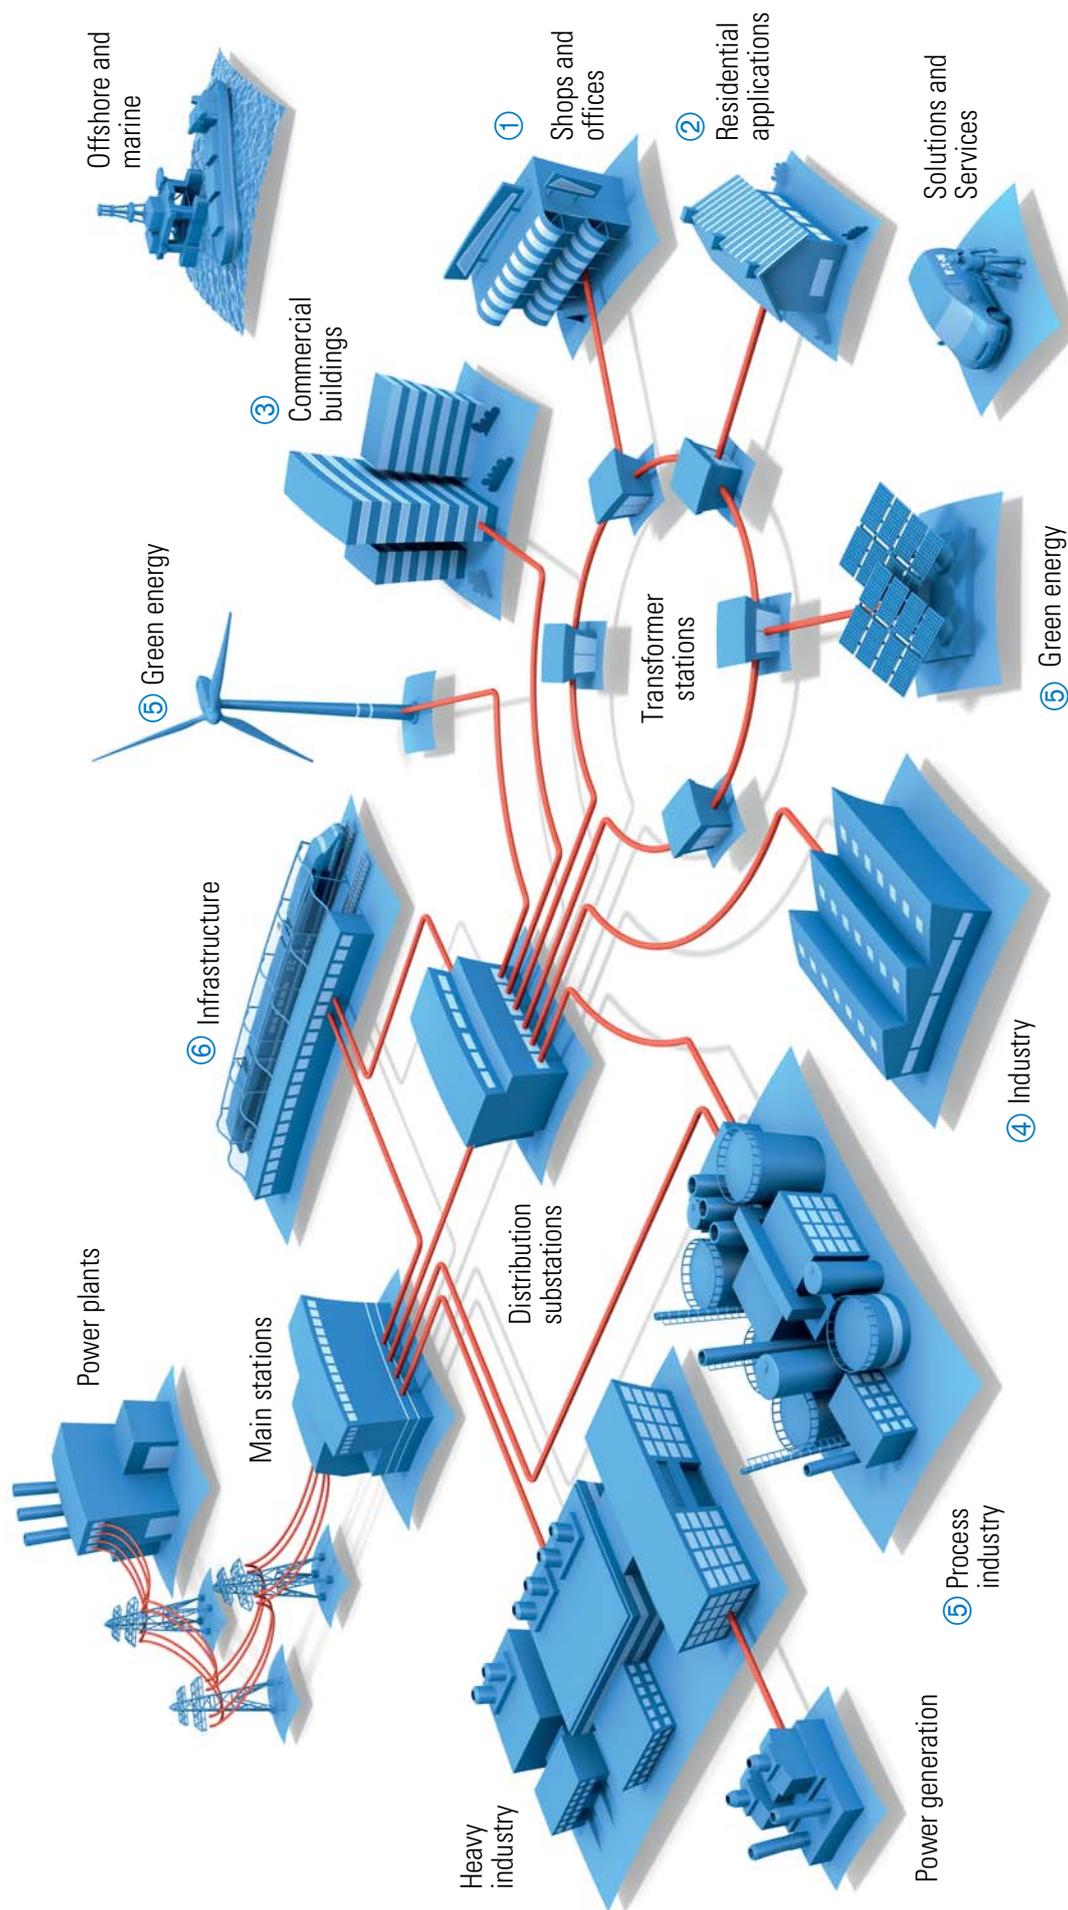

Shops and offices ①



Residential applications ②



Commercial buildings, Hotels and Infrastructure ③+⑥



Industry & Processindustry, green energy ④+⑤



IKA Industrial made of polycarbonate

Eaton Online Catalog – find product details quickly and efficiently!

You can find comprehensive up-to-date product information at <http://ecat.moeller.net/catalog>

Lookup

You can search by keywords, product names, article numbers, technical data: The search understands everything and takes you straight to the product you're looking for.

Graphical navigation

Graphical representation of the fields of application and product groups.

Selection aids

Tailored to the typical expert's approach, this search aid helps you quickly find the product you need.


Data sheets

For every article the catalog can generate a technical data sheet, which you can convert to a PDF file for printing or saving with a single click.

Parts lists

From your search results you can create a parts list that you can then send to your Eaton sales partner as a query.

You can find comprehensive up-to-date information about Eaton's automation products and switchgear in our Online Catalog.

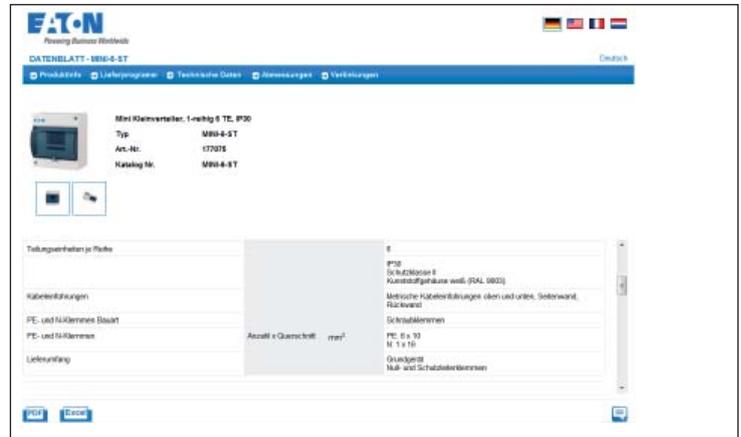

HTML data sheet; can be saved as PDF file.


Stückliste

Pos.	Anz.	Foto	Art.-Nr.	Typ	Kurztext	VPE	Lieferbarkeit	Kommentar
<input type="checkbox"/>	1		174221	KA-14-ST	IKA Verteiler Professional, IP65	1	1	Projekt Talsparga
<input type="checkbox"/>	2		177065	MICRO-4	Micro Kleinverteiler, 1-nellig 4 TE IP30	1	1	Projekt Timer
<input type="checkbox"/>	3		177075	MKA-6-ST	Mini Kleinverteiler, 1-nellig 6 TE, IP30	1	1	Projekt Renoverung
<input type="checkbox"/>	4		103103	EF-OT-3/72-C	Oberputz Flachverteiler mit Sichtfenster komplett, weiß, 24TE pro Reihe, 3 Reihen, Ausführung C	1	1	Projekt Hotel Wien
<input type="checkbox"/>	5		174652	EWK-05051	Wandgehäuse EWK mit Normeinbaueinheiten 72TE, IP43, IK09, Schutzklasse 2, RAL 5016, HxBxT=500x550x160mm	1	1	Projekt Messehalle

Alle auswählen

Position löschen Änderungen übernehmen Freie Position hinzufügen

Parts list, e.g. for queries to Eaton Sales.

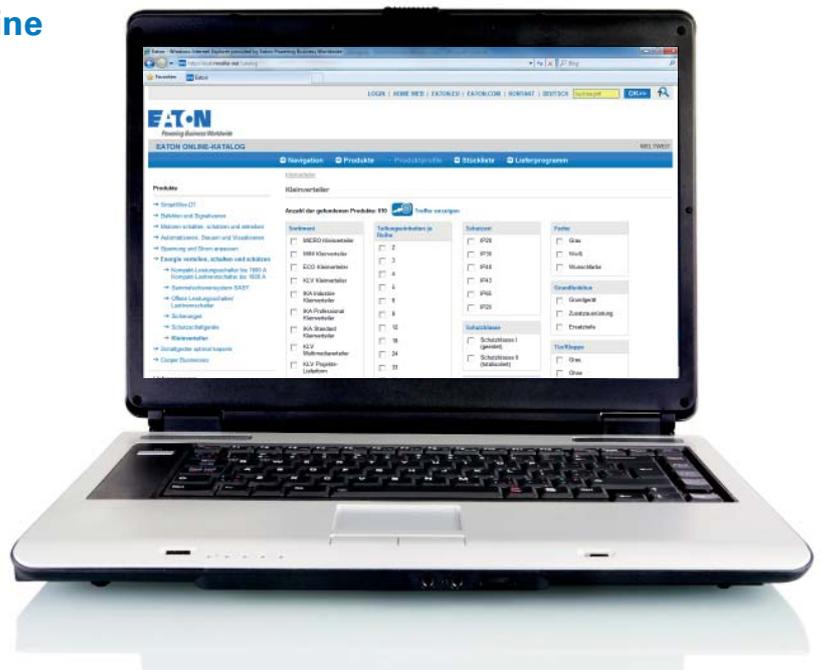

Protective Devices

Protective Devices



Accessories for Protective Devices



Controlling & Switching



Benefit:

- The entire distribution board solution is technically inter-coordinated
- The ideal solution for any application, both in the private and industrial sector
- Expansions and adjustments at a later point in time are always possible
- Perfect image at the end-customer's thanks to a single-source solution

Table of Contents xComfort Compact Distribution Boxes

Compact Distribution Boxes

- Micro & Mini compact distribution boxes, IP30 Page 2
- ECO surface-mounted/flush-mounted compact distribution boxes IP40 Page 10
- KLV flush-mounted/hollow-wall compact DBs, IP30 Page 20
- IKA surface-mounted compact distribution boxes, IP65 Page 37
- IKA-C surface-mounted compact distribution boxes, IP65 Page 48

Multimedia Distribution Boxes

- KLV flush-mounted/hollow-wall multimedia DBs, IP30 Page 59

Compact Distribution Boxes - Projects - form of delivery

- KLV flush-mounted/hollow-wall projects - form of delivery, IP30 Page 63

Flat Distribution Boxes

- BF-U-2S flush-mounted/hollow-wall flat distribution boxes, IP30 Page 67
- BF-U flush-mounted flat distribution boxes, IP30 Page 72
- BF-O surface-mounted flat distribution boxes, IP30 Page 86

Section Distribution Boxes

- EWK surface-mounted section distribution boxes, IP43 Page 100

Additional equipment

- Additional equipment / Spare parts Page 109

Compact Distribution Boxes

VT78714



VT77114



VT25414



vt14915



VT24814



vt14315



wa_vt06213



VT91314



Micro & Mini Compact Distribution Boxes, IP30

VT78914



MICRO-... and MINI-....

- Degree of protection IP20 or IP30
- Protection class II, totally insulated
- Either with or without a window
- 1-row, 3, 4, 5 and 6 MU

VT77714



- High-quality ABS plastic
- Glow wire test 650°C
- Support rail made of plastic
- Possibility of direct fixing on the wall
- Pre-punched metric areas for cable entry all around
- Lead-sealable window
- Body RAL 9003, door transparent

VT77914



VT77114



Micro & Mini Compact Distribution Boxes

Type Code

MICRO	-	4			
Micro	-	Module units			
Compact distribution boxes		MU			
		2			
		4			
MINI	-	4	-	S	T
MINI	-	Module units		Version	Version
Compact distribution boxes		MU		Indoor	Door
		2		S = Screw-type terminal	T = transparent
		3		"_" = without terminal	"_" = without door
		4			
		5			
		6			

System Overview Micro & Mini

Compact DB Version	Protection class II (totally insulated)	Complies with European Standard EN 62208	IP30	RAL 9003	N/PE Terminals	Window
Micro		 ¹⁾		 ²⁾	-	-
Mini		 ¹⁾	 ³⁾	 ²⁾	 ⁴⁾	

¹⁾ Pre-requisite for building distribution boxes from empty enclosures according to IEC/EN 61439-3

²⁾ Body and cover frame, window is transparent

³⁾ Version without a window = IP20.

⁴⁾ Only Mini-6-ST version

Legend Micro & Mini

Symbol	Explanation
	Totally insulated, according to EN 60670-24.
	Only for indoor applications.
	Resistance to abnormal heat and fire according IEC/EN 62208.

Micro Compact Distribution Boxes

IP30 (IK 05)



- Surface-mounted
- Protection class II, totally insulated
- 1-row, 2 and 4 module units
- No tools required for enclosure assembly
- Support rail made of plastic
- Enclosure made of high-quality ABS plastic
- No window
- Glow wire test 650°C
- Pre-punched metric areas for cable entry all around
- Body RAL 9003
- Possibility of direct fixing on the wall, no need to drill holes into the enclosure

	Rows / MU	Description	Window	Type designation	Article No.	Pack (pcs.)
Micro						
 <p>VT7914</p>	1 / 2	No tools required for assembly thanks to easy click-assembly	no	MICRO-2	177081	1 / 20
 <p>VT78714</p>	1 / 4	No tools required for assembly thanks to easy click-assembly	no	MICRO-4	177065	1 / 12

Mini Compact Distribution Boxes

IP30 or IP20 (IK 05)

- Surface-mounted
- Protection class II, totally insulated
- 1-row, 2, 3, 4, 5 and 6 module units
- Support rail made of plastic
- Enclosure made of high-quality ABS plastic
- Either with or without a window
- Window lead-sealable
- Glow wire test 650°C
- Pre-punched metric areas for cable entry all around
- Body RAL 9003
- Possibility of direct fixing on the wall, no need to drill holes into the enclosure



	Rows / MU	Description	Window	Type designation	Article No.	Pack (pcs.)
Mini						
VT77714, VT78914 	1 / 2	without N/PE terminals	with	MINI-2-T	177071	1 / 20
			without	MINI-2	177066	1 / 20
VT77514, VT78514 	1 / 3	without N/PE terminals	with	MINI-3-T	177072	1 / 12
			without	MINI-3	177067	1 / 12
VT77314, VT78314 	1 / 4	without N/PE terminals	with	MINI-4-T	177073	1 / 12
			without	MINI-4	177068	1 / 12
VT77114, VT78114 	1 / 5	with N terminal 1x16mm ²	with	MINI-5-ST	177074	1 / 9
		without N terminal	without	MINI-5	177069	1 / 9
VT76914, VT78114 	1 / 6	with N/PE terminals 6x10mm ² + 1x16mm ²	with	MINI-6-ST	177075	1 / 9
		without N/PE terminals	without	MINI-6	177070	1 / 9

Technical Data Micro & Mini


	Unit
Electrical	
Version according to	IEC/EN 62208
Degree of protection	IP30 (IK05); Mini without window IP20; according to EN 60529
Protection class	II, totally insulated
Rated voltage	V 400 AC
Max. power loss admitted for all devices installed in the distribution box at a difference in temperature of 20°K:	
MICRO-2	W 10.0
MICRO-4	W 10.4
MINI-2	W 10.0
MINI-3	W 10.2
MINI-4	W 10.4
MINI-5	W 10.7
MINI-6	W 10.8

Mechanical


Material:	
Enclosure	ABS
Window	SAN
Colour of the enclosure	white RAL 9003
Colour of the window	transparent
Distance between rows	mm -
Support rail for devices	Plastic
UV resistant	No
Type of installation	
MICRO	Indoor
MINI	Indoor
Halogen-free, RoHs	Yes

Dimensions (mm)


MICRO-2

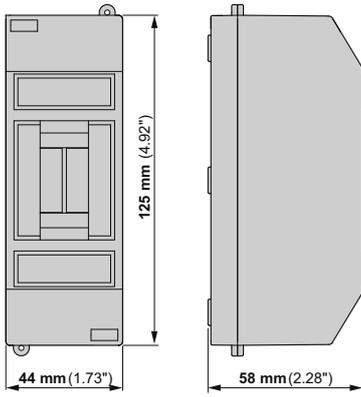


MICRO-4

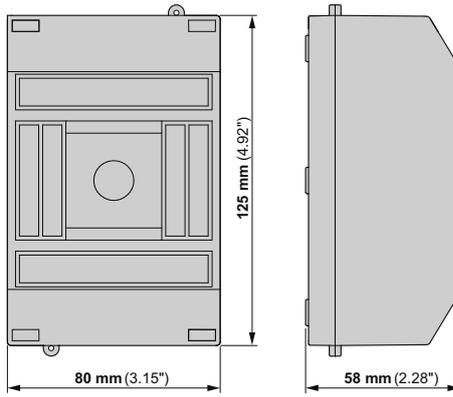

MINI-2

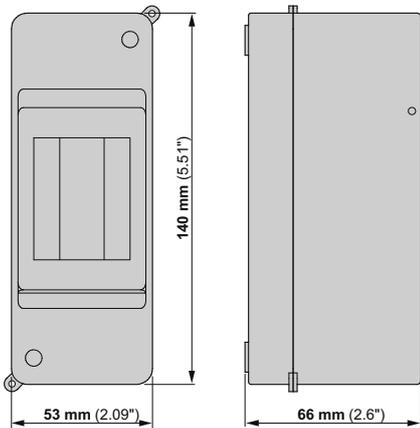


MINI-3

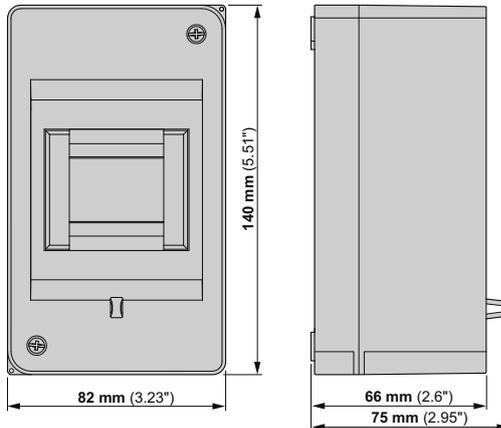


Dimensions (mm)


MINI-4

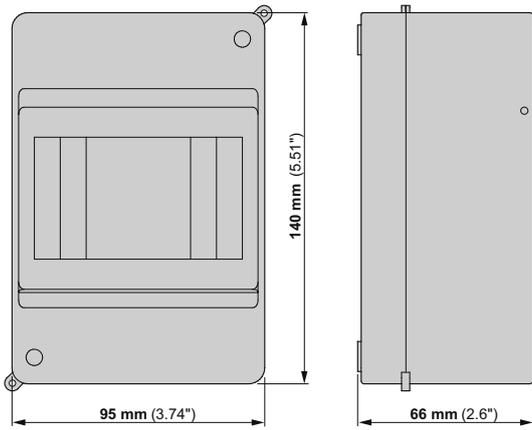


MINI-5

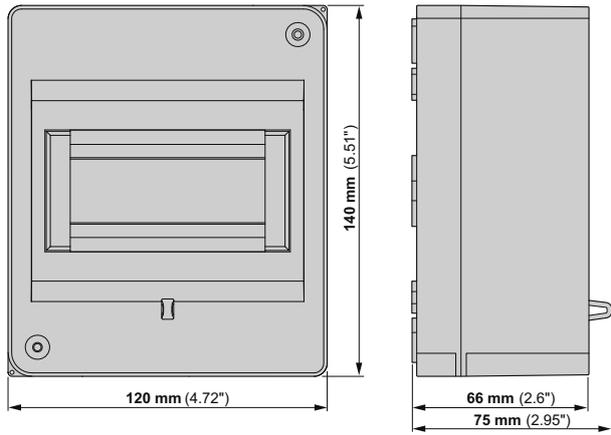

MINI-6

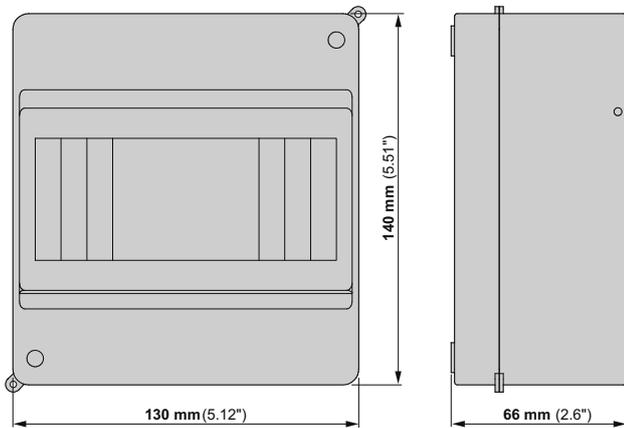


MINI-2-T

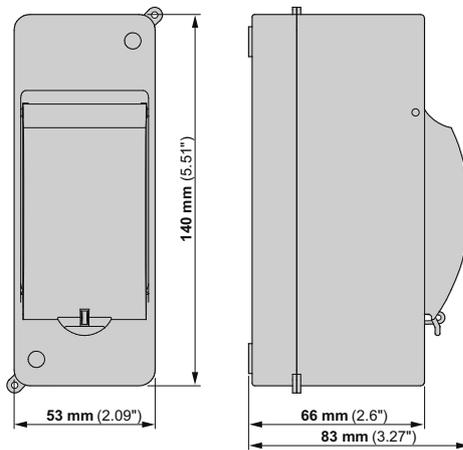


Dimensions (mm)


MINI-3-T

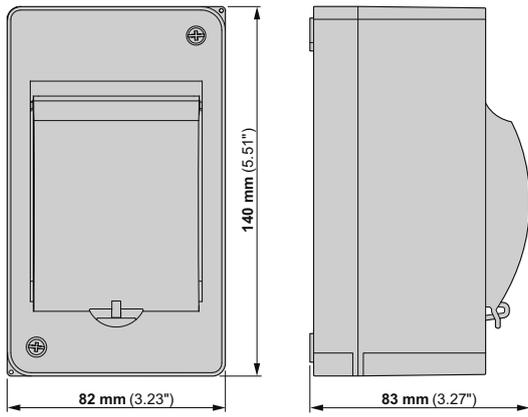


MINI-4-T

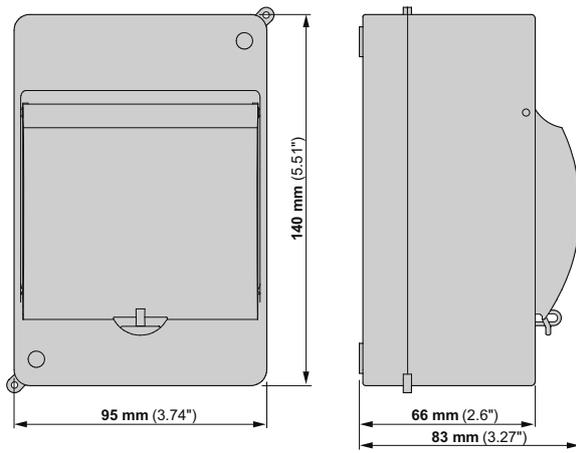

MINI-5-ST

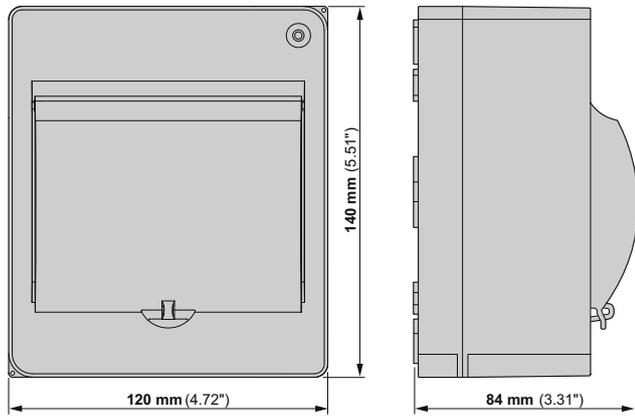

MINI-6-ST

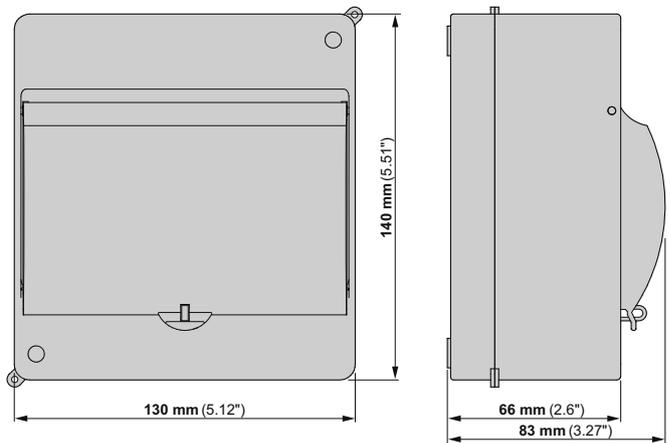

ECO Compact Distribution Box IP40

v152815



BC-0...-ECO and BC-U...-ECO

- Degree of protection IP40
- Protection class II, fully insulated
- Surface-mounted or flush-mounted
- 1 to 3 rows, 12 and 18 module units

v151615



• Mini module with 5 and 8 module units

- Glow-wire test 850 °C
- Neutral and protective conductor terminals
- Metal carrier-rail
- Cover can be lead-sealed
- Body RAL 9003, windows transparent or non-transparent

v148915



v148215



ECO Compact Distribution Boxes

Type code

BC	-	O	-	1	/	12	-TW	-ECO
Insulation material	-	Construction	-	Number of rows		Module units MUs	Version of window	Version
Compact distribution box								
		O = Surface-mounted		1		5	without = transparent	ECO = ABS plastic
		U = Flush-mounted		2		8	-TW = non-transparent	
				3		12		
						18		
						24		
						36		
						54		

Note: ABS = Acrylonitrile butadiene styrene

ECO System Overview

Compact distr. boxes Version	Protection class II (fully insulated)	meets the requirements of European Standard EN 62208	IP40	RAL 9003	N/PE Terminals	Window transparent	Window non-transparent
BC-O	■	■ ¹⁾	■	■ ²⁾	■	■	■ ³⁾
BC-U	■	■ ¹⁾	■	■ ²⁾	■	■	■ ³⁾

¹⁾ Pre-requisite for transforming empty enclosures into distribution boxes according to IEC/EN 61439-3

²⁾ Body and cover frame

³⁾ RAL9003

Legend ECO

Symbol	Explanation
	Fully insulated
	For indoor applications only.
	Resistance to abnormal heat and fire according IEC/EN 62208.

ECO Compact Distribution Boxes

IP40 (IK 05)

- Surface-mounted or flush-mounted
- Protection class II, fully insulated
- 1 to 3 rows, 12 and 18 module units
- Mini module with 5 and 8 module units
- Glow-wire test 850°C
- Neutral and protective conductor terminals with solid screw-type technology
- Metal carrier-rail
- Cover can be lead-sealed
- Body RAL 9003, window transparent or non-transparent



	Rows / MUs	Description	Window	Type designation	Article No.	Pack (pcs.)
Mini MUs - Surface-mounted						
vt53215, vt53515 	1 / 5	with N/PE screw-terminal 4 x 10 mm ² each	transparent	BC-O-1/5-ECO	280345	1
			RAL9003	BC-O-1/5-TW-ECO	281649	1
vt52415, vt52715 	1 / 8	with N/PE screw-terminal 8 x 10 mm ² each	transparent	BC-O-1/8-ECO	280346	1
			RAL9003	BC-O-1/8-TW-ECO	281690	1
12 MUs per row - Surface-mounted						
vt51915, vt51615 	1 / 12	with N/PE screw-terminal 12 x 10 mm ² each	transparent	BC-O-1/12-ECO	280347	1
			RAL9003	BC-O-1/12-TW-ECO	281691	1
wa_vt13115, vt49315 	2 / 24	with N/PE screw-terminal 2x (12 x 10 mm ²) each	transparent	BC-O-2/24-ECO	280349	1
			RAL9003	BC-O-2/24-TW-ECO	281693	1
vt48215, vt48115 	3 / 36	with N/PE screw-terminal 3x (12 x 10 mm ²) each	transparent	BC-O-3/36-ECO	284640	1
			RAL9003	BC-O-3/36-TW-ECO	284642	1

	Rows / MUs	Description	Window	Type designation	Article No.	Pack (pcs.)
18 MUs per row - Surface-mounted						
vt50115, vt49615 	1 / 18	with N/PE screw-terminal 18x 10 mm ² each	transparent	BC-O-1/18-ECO	280348	1
			RAL9003	BC-O-1/18-TW-ECO	281692	1
vt51015, vt50915 	2 / 36	with N/PE screw-terminal 2x (18 x 10 mm ²) each	transparent	BC-O-2/36-ECO	280350	1
			RAL9003	BC-O-2/36-TW-ECO	281694	1
vt47615, vt47815 	3 / 54	with N/PE screw-terminal 3x (18 x 10 mm ²) each	transparent	BC-O-3/54-ECO	280351	1
			RAL9003	BC-O-3/54-TW-ECO	281695	1
Mini MUs - Flush-mounted						
vt52815, vt53115 	1 / 5	with N/PE screw-terminal 4x 10 mm ² each	transparent	BC-U-1/5-ECO	280352	1
			RAL9003	BC-U-1/5-TW-ECO	281696	1
vt52315, vt52015 	1 / 8	with N/PE screw-terminal 8x 10 mm ² each	transparent	BC-U-1/8-ECO	280353	1
			RAL9003	BC-U-1/8-TW-ECO	281697	1

	Rows / MUs	Description	Window	Type designation	Article No.	Pack (pcs.)
12 MUs per row - Flush-mounted						
vt51515, vt51315 	1 / 12	with N/PE screw-terminal 12x 10 mm ² each	transparent	BC-U-1/12-ECO	280354	1
			RAL9003	BC-U-1/12-TW-ECO	281698	1
18 MUs per row - Flush-mounted						
vt48915, vt49015 	2 / 24	with N/PE screw-terminal 2x (12 x 10 mm ²) each	transparent	BC-U-2/24-ECO	280356	1
			RAL9003	BC-U-2/24-TW-ECO	281710	1
vt48915, vt48615 	3 / 36	with N/PE screw-terminal 3x (12 x 10 mm ²) each	transparent	BC-U-3/36-ECO	284641	1
			RAL9003	BC-U-3/36-TW-ECO	284643	1
18 MUs per row - Flush-mounted						
vt49815, vt49715 	1 / 18	with N/PE screw-terminal 18x 10 mm ² each	transparent	BC-U-1/18-ECO	280355	1
			RAL9003	BC-U-1/18-TW-ECO	281699	1
vt50615, vt50515 	2 / 36	with N/PE screw-terminal 2x (18 x 10 mm ²) each	transparent	BC-U-2/36-ECO	280357	1
			RAL9003	BC-U-2/36-TW-ECO	281711	1

ECO Compact Distribution Boxes

Technical Data - ECO


		Unit
Electrical		
Versions according to		EN 62208
Degree of protection		IP40 (IK05) according to EN 60529
Protection class		II, fully insulated
Rated voltage	V	400 AC
Max. power loss admitted for all devices installed in the distribution box, at a difference in temperature of 20°K:		
1/5	W	5
1/8	W	8
1/12	W	13
2/24	W	19
3/36	W	23
1/18	W	19
2/36	W	29
3/54	W	38
Mechanical		
Material		
Enclosure		ABS
Window		ABS
Colour of the enclosure		white RAL 9003
Colour of the door		transparent; white RAL 9003
Distance between the rows	mm	125
Device carrier		DIN rail 35 x 7.5 mm, galvanized sheet steel
UV stability		-
Glow-wire test		850 °C
Installation type		
BC-O....		Indoor
BC-U...		Indoor
No halogens, RoHs		yes

ECO Compact Distribution Boxes


Dimensions (mm)

Surface-mounted Compact Distribution Boxes BC-O-...


BC-O-1/5....

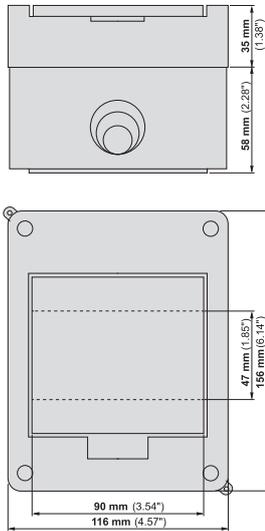


BC-O-1/8....

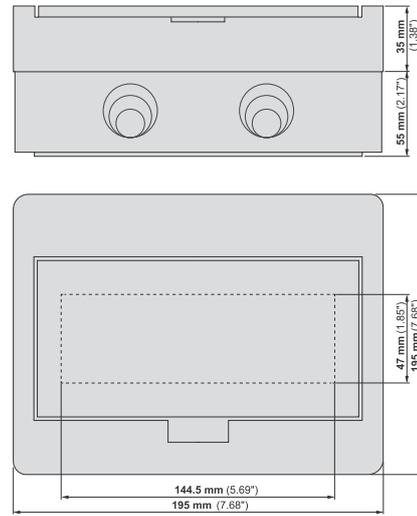

BC-O-1/12....

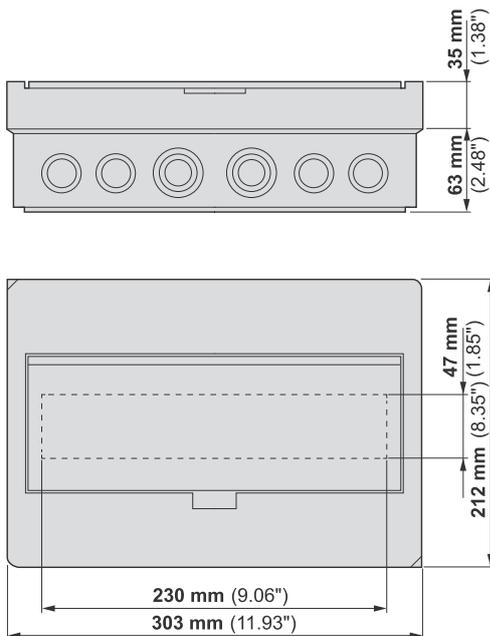

BC-O-2/24....

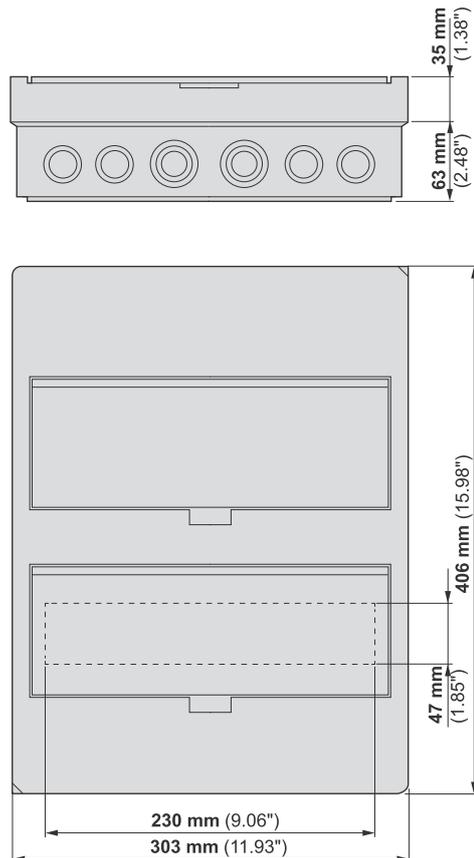


ECO Compact Distribution Boxes


Dimensions (mm)

Surface-mounted Compact Distribution Boxes BC-O-...


BC-O-3/36....

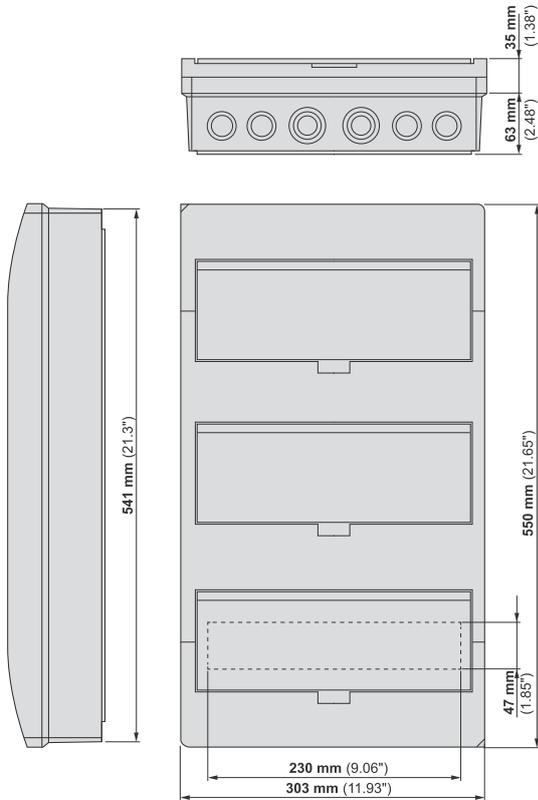


BC-O-1/18....

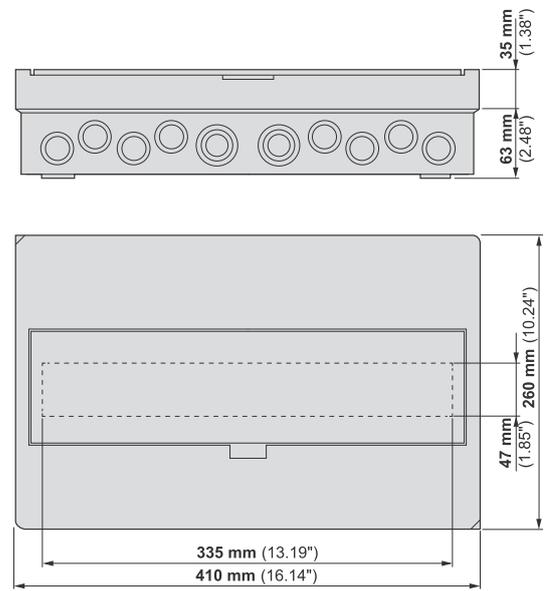

BC-O-2/36....

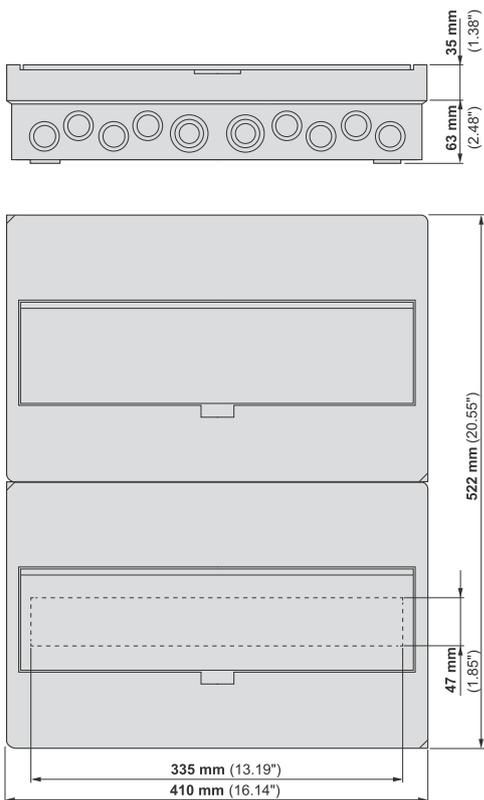

BC-O-3/54....

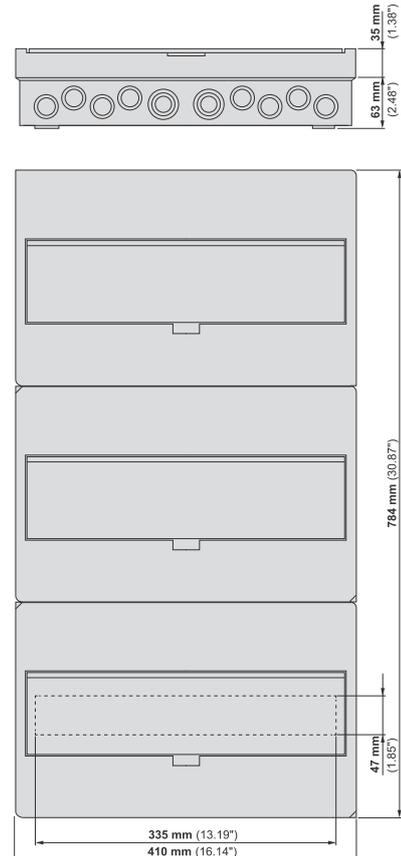


ECO Compact Distribution Boxes


Dimensions (mm)

Flush-mounted Compact Distribution Boxes BC-U-...


BC-U-1/5....

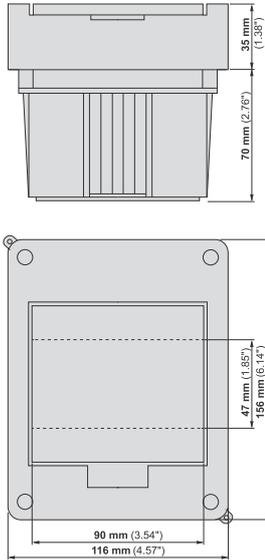


BC-U-1/8....

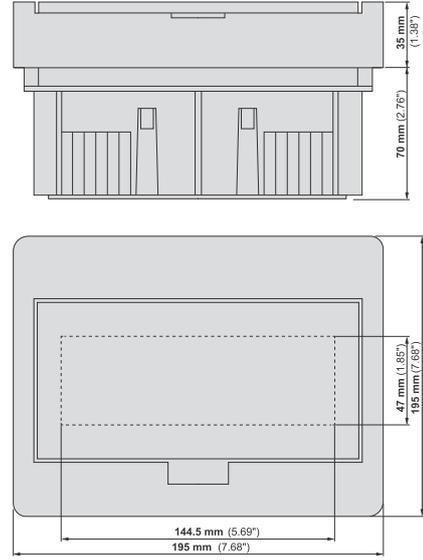

BC-U-1/12....

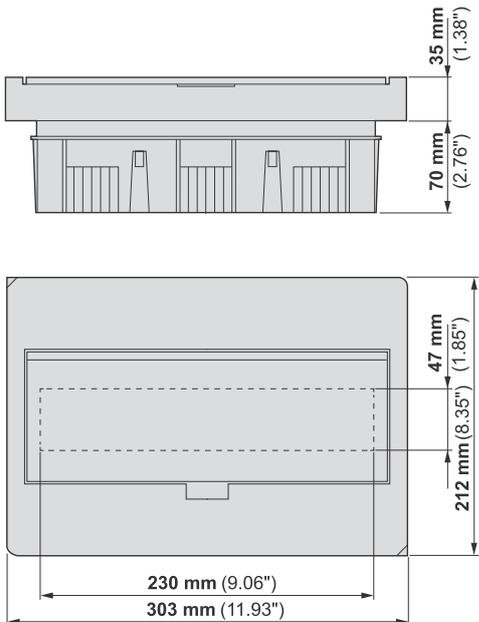

BC-U-2/24....

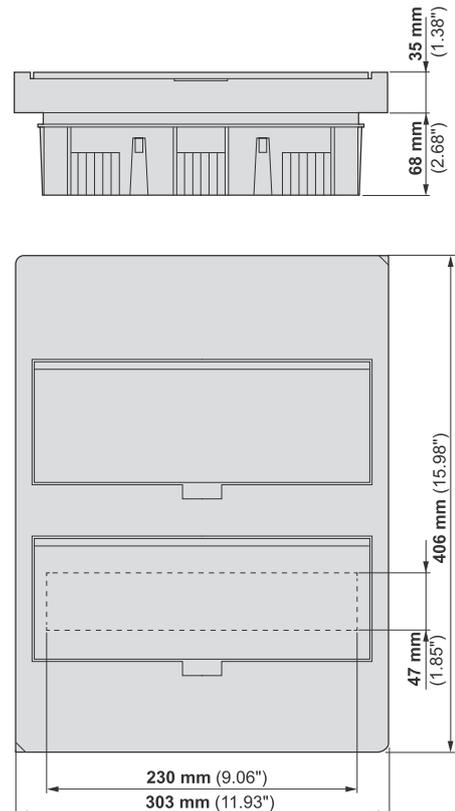


ECO Compact Distribution Boxes


Dimensions (mm)

Flush-mounted Compact Distribution Boxes BC-U-...


BC-U-3/36....

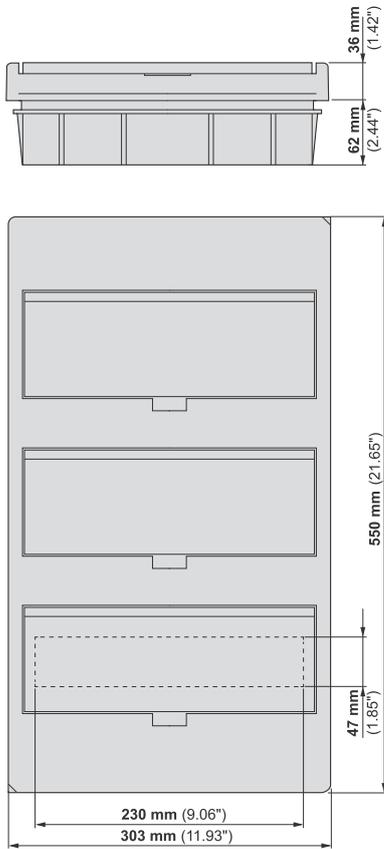

BC-U-1/18....

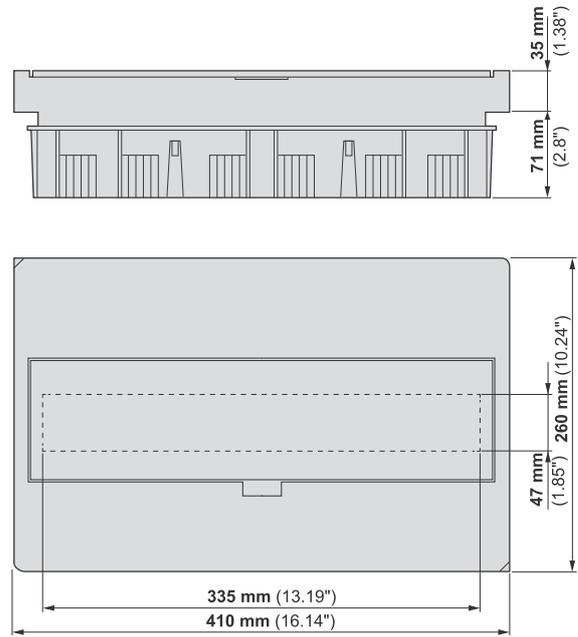

BC-U-2/36....

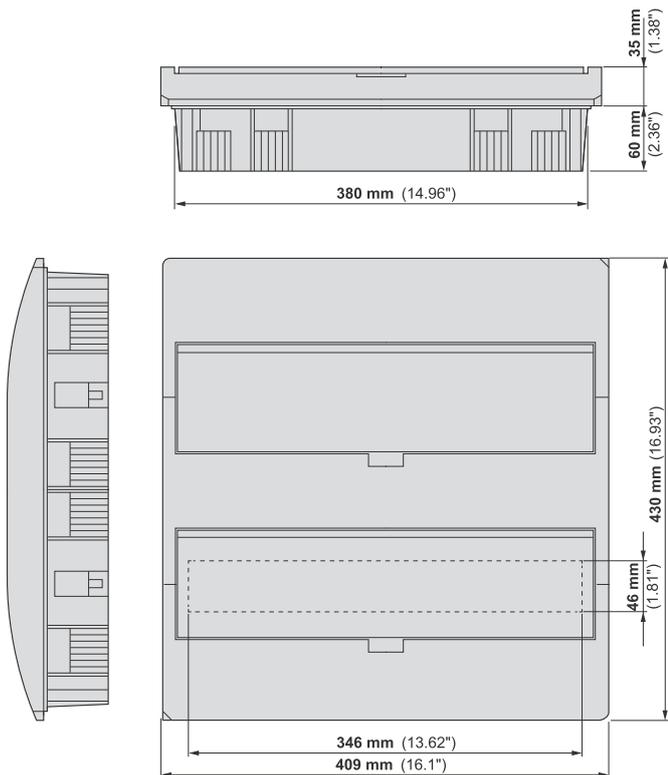

KLV Flush-mounted/Hollow-wall Compact DBs, IP30

vt15715



KLV-...UP and KLV-...HW

- 1 to 4 rows, 12 module units and 2 spare MUs in each row
- Multimedia variants
- Hollow-wall and flush-mounted versions
- Flat and super flat door design

vt15315



- Integrated spirit level
- 3D plaster compensation
- Terminals for neutral and protective conductors
- N-FI expansion terminal (FI = RCD = Residual Current Device)
- Pre-punched cable entries on all sides
- Degree of protection IP30

vt14915



- Protection class II, fully insulated
- Door and cover frame, sheet steel RAL 9016
- Low halogen level

vt14515



KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30

Type key

KLV	-	24	UP	P	-	F
Large DB with large wiring area	-	Module units MU	Type of installation of the wall pan	Design of inside equipment	-	Design of door and frame
		12	UP = Flush-mounted	P = Plug-type terminal		F = flat
		24	HW = Hollow-wall	S = Screw-type terminal		SF = super-flat
		36		M = Media		
		48				

System Overview of KLV Flush-mounted/Hollow-wall Compact DBs, IP30

Compact DB Design	Protection class II (fully insulated)	IP30	IEC/EN 62208	IEC/EN 60670-24	RAL 9016
Flush-mounted	■	■	■	■ ³⁾	■ ²⁾
Hollow-wall	■	■	■	■ ³⁾	■ ²⁾
Media	■ ¹⁾	■	■	■	■ ²⁾

¹⁾ To maintain protection class II in media distribution boards, all devices installed must be of the fully insulated type.

²⁾ Sheet steel door and frame

³⁾ Rated current up to 63 A

KLV Flush-mounted/Hollow-wall Compact DBs, IP30

More and larger terminal points for practical use ¹⁾

Rows / MU	Terminal points per N and PE acc. to EN 60670-24 (DIN 43871) required		Terminal points per N and PE Eaton KSK terminal (KSK= Combined plug-type terminal)		Terminal points per N and PE Eaton SK terminal (SK = Screw-type terminal)
1 / 12+2	10x 4mm ²	2x 16mm ²	14x 4mm ²	2x 25mm ²	13x 0.75-16mm ²
2 / 24+4	14x 4mm ²	2x 16mm ²	14x 4mm ²	2x 25mm ²	16x 0.75-16mm ²
3 / 36+6	17x 4mm ²	4x 16mm ²	28x 4mm ²	4x 25mm ²	25x 0.75-16mm ²
4 / 48+8	20x 4mm ²	4x 16mm ²	28x 4mm ²	4x 25mm ²	25x 0.75-16mm ²

¹⁾ Eaton compact distribution boards can be expanded in a modular way by adding N-FI (RCD) potentials. See Technical Data section for more details.

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30

Scope of delivery - Overview of Compact Energy Distribution Boards Flush-mounted/Hollow-wall KLV

	KLV...-UPP...	KLV...-HWP...	KLV...-UPS...	KLV...-HWS...
Wall pan - flush-mounted	■	-	■	-
Wall pan - hollow-wall	-	■	-	■
Spirit level	■	■	■	■
Cable holder	■	■	■	■
Cover for electric shock protection	■	■	■	■
Flange slide	■	■	■	■
Nail straps	■	-	■	-
Hollow-wall anchor	-	■	-	■
DIN carrier rail with crossbar	■	■	■	■
N/PE combined plug-type terminal	■	■	-	-
N/PE screw-type terminal	-	-	■	■
N-FI terminal ¹⁾ (FI = RCD)	■	■	■	■
3D plaster compensation	■	■	■	■
Frame flat/super flat	■	■	■	■
Door flat/super flat	■	■	■	■
Power circuit sticker	■	■	■	■

¹⁾ Note: Included in the scope of delivery of 2, 3 and 4 row distribution boards



vt14915



vt12515



vt15015



vt12615

Scope of delivery - Overview of Compact Media Distribution Boards Flush-mounted/Hollow-wall KLV

	KLV...-UPM...	KLV...-HWM...
Wall pan - flush-mounted	■	-
Wall pan - hollow-wall	-	■
Spirit level	■	■
Cable holder	■	■
Cover for electric shock protection	-	-
Flange slide	■	■
Nail straps	■	-
Hollow-wall anchor	-	■
DIN carrier rail (1x)	■	■
Mounting plate with holes prepared f. knock-out	■	■
2-fold electricity socket (EURO2)	■	■
3D plaster compensation	■	■
Frame flat/super flat	■	■
Door ventilated	■	■
Connection brackets	■	■



vt14215




vt13915

Short description of KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30

Symbols	Explanation
	Protective insulation, according to EN 60670-24.
	Approved for indoor use only.
	Glow-wire test according to IEC/EN 62208.
	Flush-mounting according to IEC/EN 60670-24.
	Hollow-wall mounting according to IEC/EN 60670-24.
	Multimedia applications in GP universal enclosure according to IEC/EN 60670-24.
	Delivery form for projects, separate ordering and delivery of assemblies.

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30 (combined plug-type terminal)

IP 30




- Approved according to IEC/EN 60670-24 and IEC/EN 62208, i.e. for distributions according to IEC/EN 61439-3
- N/PE combined plug-type terminal, finger-proof IP2X with combined snap-on and screw-technology, terminal points are easy to add to the carrier, with a separate N-FI terminal block (FI = RCD).
- Self-extinguishing plastic, resistant to abnormal heat and fire up to 650°C, glow-wire test according to IEC/EN 62208
- Door with frame made of sheet steel, with 3D plaster compensation (compensation possible up to 18 mm), colour RAL 9016, optionally flat (F) or super flat (SF)
- Stable device cover made of plastic, with cut-outs for DIN switchgear and protective devices, 12+2 MU per row, 90° four-point lock, lead-sealing is possible, laser-labelled rating plate
- Wall pan made of plastic with integrated spirit level
- DIN carrier rails galvanised, stable design with crossbars, 125 mm distance between rows
- Wiring duct at the side, with cable holder for clearly structured wiring
- Cable insertion slide with pre-punched holes and snap-on fixing
- Door hinges are easy to inverse, hinges for manual handling
- Flat rotary closure of the door, can be replaced by one of the lock versions
- Nail straps for fixing on the wall

	Rows / MU	Description	Type designation	Article No.	Pack (pcs.)
Flush-mounted UPP (combined plug-type terminal KSK)					
	1 / 12+2	with 1x N/PE comb. plug-type terminal 2x 2.5-25 mm ² each and 14x 0.5-4 mm ² each	KLV-12UPP-F	178798	1/90
			KLV-12UPP-SF	178799	1/90
	2 / 24+4	with 1x N/PE comb. plug-type terminal 2x 2.5-25 mm ² each and 14x 0.5-4 mm ² each 1x N-FI single terminal with 1x 2.5-25 mm ² and 7x 0.5-4 mm ²	KLV-24UPP-F	178800	1/60
			KLV-24UPP-SF	178801	1/60
	3 / 36+6	with 1x N/PE comb. plug-type terminal 4x 2.5-25 mm ² each and 28x 0.5-4 mm ² each with separate N-FI terminal block	KLV-36UPP-F	178802	1/60
			KLV-36UPP-SF	178803	1/60
	4 / 48+8	with 1x N/PE comb. plug-type terminal 4x 2.5-25 mm ² each and 28x 0.5-4 mm ² each with separate N-FI terminal block	KLV-48UPP-F	178804	1/45
			KLV-48UPP-SF	178805	1/45

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30 (combined plug-type terminal)

IP 30




- Approved according to IEC/EN 60670-24 and IEC/EN 62208, i.e. for distributions according to IEC/EN 61439-3
- N/PE combined plug-type terminal, finger-proof IP2X with combined snap-on and screw technology, terminal points are easy to add to the carrier, with a separate N-FI terminal block (FI = RCD).
- Self-extinguishing plastic, resistant to abnormal heat and fire up to 850°C, glow-wire test according to IEC/EN 62208
- Door with frame made of sheet steel, with 3D plaster compensation (compensation possible up to 18 mm), colour RAL 9016, optionally flat (F) or super flat (SF)
- Stable device cover made of plastic, with cut-outs for DIN switchgear and protective devices, 12+2 MU per row, 90° four-point lock, lead-sealing is possible, laser-labelled rating plate
- Wall pan made of plastic with integrated spirit level
- DIN carrier rails galvanised, stable design with crossbars, 125 mm distance between rows
- Wiring duct at the side, with cable holder for clearly structured wiring
- Cable insertion slide with pre-punched holes and snap-on fixing
- Door hinges are easy to inverse, hinges for manual handling
- Flat rotary closure of the door, can be replaced by one of the lock versions
- Hollow-wall anchor for fixing in a hollow wall

	Rows / MU	Description	Type designation	Article No.	Pack (pcs.)
Hollow-wall mounting HWP (combined plug-type terminal KSK)					
	1 / 12+2	with 1x N/PE comb. plug-type terminal 2x 2.5-25 mm ² each and 14x 0.5-4 mm ² each	KLV-12HWP-F	178806	1/90
			KLV-12HWP-SF	178807	1/90
	2 / 24+4	with 1x N/PE comb. plug-type terminal 2x 2.5-25 mm ² each and 14x 0.5-4 mm ² 1x N-FI single terminal with 1x 2.5-25 mm ² and 7x 0.5-4 mm ²	KLV-24HWP-F	178808	1/60
			KLV-24HWP-SF	178809	1/60
	3 / 36+6	with 1x N/PE comb. plug-type terminal 4x 2.5-25 mm ² each and 28x 0.5-4 mm ² each with a separate N-FI terminal block	KLV-36HWP-F	178810	1/60
			KLV-36HWP-SF	178811	1/60
	4 / 48+8	with 1x N/PE comb. plug-type terminal 4x 2.5-25 mm ² each and 28x 0.5-4 mm ² each with separate N-FI terminal block	KLV-48HWP-F	178812	1/45
			KLV-48HWP-SF	178813	1/45

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30 (screw-type terminal)

IP 30




- Approved according to IEC/EN 60670-24 and IEC/EN 62208, i.e. for distributions according to IEC/EN 61439-3
- N/PE screw-type terminal, with electric shock protection, additional terminal points are easy to add
- N-FI (FI = RCD) expansion terminal, comes as a standard feature in distribution boards with 2 to 4 rows, additional N-FI terminals of the accessories range can be added
- Self-extinguishing plastic, resistant to abnormal heat and fire up to 650°C, glow-wire test according to IEC/EN 62208
- Door with frame made of sheet steel, with 3D plaster compensation (compensation possible up to 18 mm), colour RAL 9016, optionally flat (F) or super flat (SF)
- Stable device cover made of plastic, with cut-outs for DIN switchgear and protective devices, 12+2 MU per row, 90° four-point lock, lead-sealing is possible, laser-labelled rating plate
- Wall pan made of plastic with integrated spirit level
- DIN carrier rails galvanised, stable design with crossbars, 125 mm distance between rows
- Wiring duct at the side, with cable holder for clearly structured wiring
- Cable insertion slide with pre-punched holes and snap-on fixing
- Door hinges are easy to inverse, hinges for manual handling
- Flat rotary closure of the door, can be replaced by one of the lock versions
- Nail straps for fixing on the wall

	Rows / MU	Description	Type designation	Article No.	Pack (pcs.)
Flush-mounted UPS (screw-type terminal SK)					
 vt15815	1 / 12+2	with 1x N/PE screw-type terminal 13x 0.75-16 mm ² (N) and 13x 0.75-16 mm ² (PE)	KLV-12UPS-F	178814	1/90
			KLV-12UPS-SF	178815	1/90
 vt15415	2 / 24+4	with 1x N/PE screw-type terminal 13x 0.75-16 mm ² (N) and 16x 0.75-16 mm ² (PE) plus 1x N-FI terminal with 4x 0.75-16 mm ² each	KLV-24UPS-F	178816	1/60
			KLV-24UPS-SF	178817	1/60
 vt15015	3 / 36+6	with 2x N/PE screw-type terminal 25x 0.75-16 mm ² (N) and 25x 0.75-16 mm ² (PE) plus 1x N-FI terminal with 4x 0.75-16 mm ² each	KLV-36UPS-F	178818	1/60
			KLV-36UPS-SF	178819	1/60
 vt14615	4 / 48+8	with 2x N/PE screw-type terminal 25x 0.75-16 mm ² (N) and 25x 0.75-16 mm ² (PE) plus 1x N-FI terminal with 4x 0.75-16 mm ² each	KLV-48UPS-F	178820	1/45
			KLV-48UPS-SF	178821	1/45

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30 (screw-type terminal)

IP 30



- Approved according to IEC/EN 60670-24 and IEC/EN 62208, i.e. for distributions according to IEC/EN 61439-3
- N/PE screw-type terminal, electric shock protection, additional terminal points are easy to add
- N-FI (FI = RCD) expansion terminal, comes as a standard feature in distribution boards with 2 to 4 rows, additional N-FI terminals of the accessories range can be added
- Self-extinguishing plastic, resistant to abnormal heat and fire up to 850°C, glow-wire test according to IEC/EN 62208
- Door with frame made of sheet steel, with 3D plaster compensation (compensation possible up to 18 mm), colour RAL 9016, optionally flat (F) or super flat (SF)
- Stable device cover made of plastic, with cut-outs for DIN switchgear and protective devices, 12+2 MU per row, 90° four-point lock, lead-sealing is possible, laser-labelled rating plate
- Wall pan made of plastic with integrated spirit level
- DIN carrier rails galvanised, stable design with crossbars, 125 mm distance between rows
- Wiring duct at the side, with cable holder for clearly structured wiring
- Cable insertion slide with pre-punched holes and snap-on fixing
- Door hinges are easy to inverse, hinges for manual handling
- Flat rotary closure of the door, can be replaced by one of the lock versions
- Hollow-wall anchor for fixing in a hollow wall

	Rows / MU	Description	Type designation	Article No.	Pack (pcs.)
Hollow-wall mounted HWS (screw-type terminal SK)					
vt13415 	1 / 12+2	with 1x N/PE screw-type terminal 13x 0.75-16 mm ² (N) and 13x 0.75-16 mm ² (PE)	KLV-12HWS-F	178822	1/90
			KLV-12HWS-SF	178823	1/90
vt13015 	2 / 24+4	with 1x N/PE screw-type terminal 13x 0.75-16 mm ² (N) and 16x 0.75-16 mm ² (PE) plus 1x N-FI terminal with 4x 0.75-16 mm ² each	KLV-24HWS-F	178824	1/60
			KLV-24HWS-SF	178825	1/60
vt12615 	3 / 36+6	with 2x N/PE screw-type terminal 25x 0.75-16 mm ² (N) and 25x 0.75-16 mm ² (PE) plus 1x N-FI terminal with 4x 0.75-16 mm ² each	KLV-36HWS-F	178826	1/60
			KLV-36HWS-SF	178827	1/60
vt12215 	4 / 48+8	with 2x N/PE screw-type terminal 25x 0.75-16 mm ² (N) and 25x 0.75-16 mm ² (PE) plus 1x N-FI terminal with 4x 0.75-16 mm ² each	KLV-48HWS-F	178828	1/45
			KLV-48HWS-SF	178829	1/45

Rows / MU	Description	Type designation	Article No.	Pack (pcs.)
-----------	-------------	------------------	-------------	-------------

Flush-mounting, without terminals

4500PIC-20



With DIN rail structure, door with door frame, super flat (SF), stable device cover, cable holder	1 / 12+2	KLV-12UP-SF	184797	1/90
	2 / 24+4	KLV-24UP-SF	184798	1/60
	3 / 36+6	KLV-36UP-SF	184799	1/60
	4 / 48+8	KLV-48UP-SF	184800	1/45

Technical data same as full-equipped KLV.

Hollow-wall mounting, without terminals

4500PIC-17



With DIN rail structure, door with door frame, super flat (SF), stable device cover, cable holder	1 / 12+2	KLV-12HW-SF	184801	1/90
	2 / 24+4	KLV-24HW-SF	184802	1/60
	3 / 36+6	KLV-36HW-SF	184803	1/60
	4 / 48+8	KLV-48HW-SF	184804	1/45

Technical data same as full-equipped KLV.

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30

Technical Data KLV-...

	Unit
Electrical	
Design according to	IEC/EN 62208; IEC/EN 60670-24
Degree of protection	IP30 (IK05) according to EN 60529
Protection class	II, fully insulated
Rated voltage	V 400 AC
Insulation voltage	V 1000 AC
Max. power loss admitted for all devices installed in the distribution board, at a difference in temperature of 35°K:	
1/12+2	W 21
2/24+4	W 34
3/36+6	W 43
4/48+8	W 48

Mechanical

Material:	
Enclosure	Polystyrole
Door/frame	Sheet steel, powder-coated with corrosion protection
Colour of the enclosure	White RAL 9016
Colour of the door/frame	White RAL 9016
Distance between the rows	mm 125
Carrier rail for devices	DIN rail 35 x 7.5 mm sheet steel, galvanised
UV resistant	No
Glow-wire test	°C 850 (hollow-wall), 650 (flush-mounted)
Installation type	
KLV-...-UP...	Indoor
KLV-...-HW...	Indoor
in areas exposed to a risk of fire	no
Halogen-free, RoHs	<1%, yes

Metrical or pre-punched holes prepared for knock-out


1/12+2	Top/bottom: Pre-punched Rear panel: 10x Ø 28 mm Side panel: right and left 2x Ø 28 mm each
2/24+4	Top/bottom: Pre-punched Rear panel: 10x Ø 28 mm Side panel: right and left 2x Ø 28 mm each
3/36+6	Top/bottom: Pre-punched Rear panel: 10x Ø 28 mm Side panel: right and left 2x Ø 28 mm each
4/48+8	Top/bottom: Pre-punched Rear panel: 10x Ø 28 mm Side panel: right and left 2x Ø 28 mm each

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30

Technical Data - Terminals


KSK-N, KSK-PE, configuration examples

vt25115




1x KSK-N (PE)

vt25215

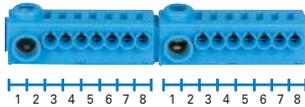

2x KSK-N (PE)

vt25315

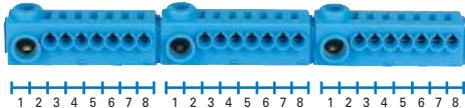

3x KSK-N (PE)

vt25415



4x KSK-N (PE)

vt119114



KSK-KLV

Cross sections of connections and other important information

Per block 1x screw-type connection for 2.5-25 mm² (single-wired/multiwired) or 2.5-16 mm² (fine-wired with professionally pressed wire end sleeve).

Per block 7x plug-type connection for 0.5-4 mm² (single-wired/multi-wired or fine-wired with professionally pressed wire end sleeve).

The tightening torque [Nm] of the screw connection is indicated on the terminal enclosure.

Minimum connection length in case of a plug-type connection is indicated on the terminal enclosure.

Max. electrical load 63A / 400V AC

Degree of protection IP2X

High safety level thanks to finger-proof plastic encapsulation, degree of protection IP2X

N potential in blue colour, protective-conductor potential in green colour

Modular as the additional block can be plugged onto the terminal carrier without any tools to provide additional separate RCD protective circuits. Up to 4 blocks per terminal carrier, up to 4 terminal carriers in each distribution board.

Separate blocks can be interlinked using cable links.

We recommend 4 mm² (rigid or flexible with wire end sleeve).


Vertical offset for terminal carriers in the distribution board to provide easy access to the connections and easy snap-on in the distribution board.

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30

Technical Data - Terminals


KSK-... included in the scope of delivery of the distribution board KLV-...UPP (HWP)

vt24915

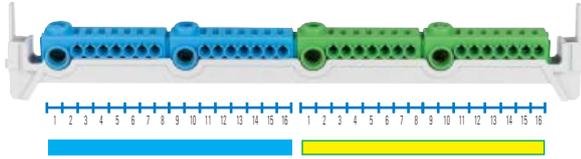


KSK-2N/2PE-KLV

vt25015

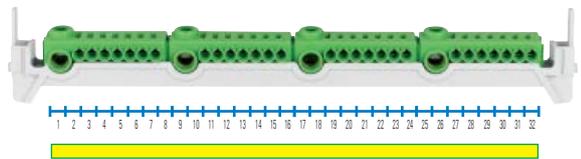


KSK-4N-KLV

vt24815

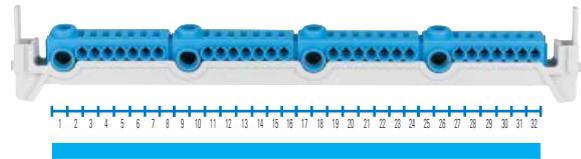


KSK-4N-KLV

vt24815

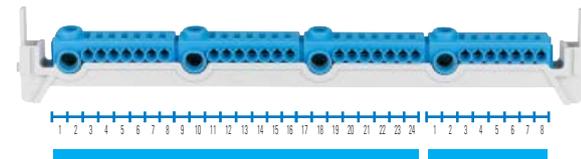

KSK-3N/1N-KLV

vt24815

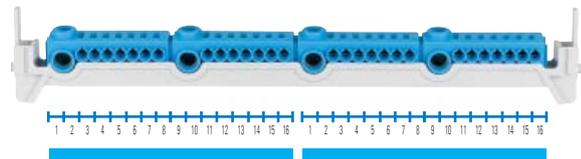

KSK-2N/2N-KLV

Cross sections of connections and other important information **KSK-2N/2PE-KLV**

Per potential 2x screw-type connection for 2.5-25 mm² (single-wired/multi-wired) or 2.5-16 mm² (fine-wired with professionally pressed wire end sleeve) as well as 14x plug-type connection for 0.5-4 mm² (single-wired/multi-wired or fine-wired with professionally pressed wire end sleeve).

KSK-4N..., KSK-3N/1N..., KSK-2N/2N..., KSK-4PE...

Per block 1x screw-type connection for 2.5-25 mm² (single-wired/multi-wired) or 2.5-16 mm² (fine-wired with professionally pressed wire end sleeve), as well as 7x plug-type connection for 0.5-4 mm² (single-wired/multi-wired or fine-wired with professionally pressed wire end sleeve).

The tightening torque [Nm] of the screw-type connection is indicated on the terminal enclosure.

Minimum connection length with plug-type connection is indicated on the terminal enclosure.

Max. electrical load 63A / 400V AC

Degree of protection IP2X

High safety level thanks to finger-proof plastic encapsulation, degree of protection IP2X


N potential in blue colour, protective-conductor potential in green colour

Vertical offset for terminal carriers in the distribution board to provide easy access to the connections and easy snap-on in the distribution board

KLV Flush-mounted/Hollow-wall Compact Distribution Board, IP30

Dimensions (mm)


KLV-12...

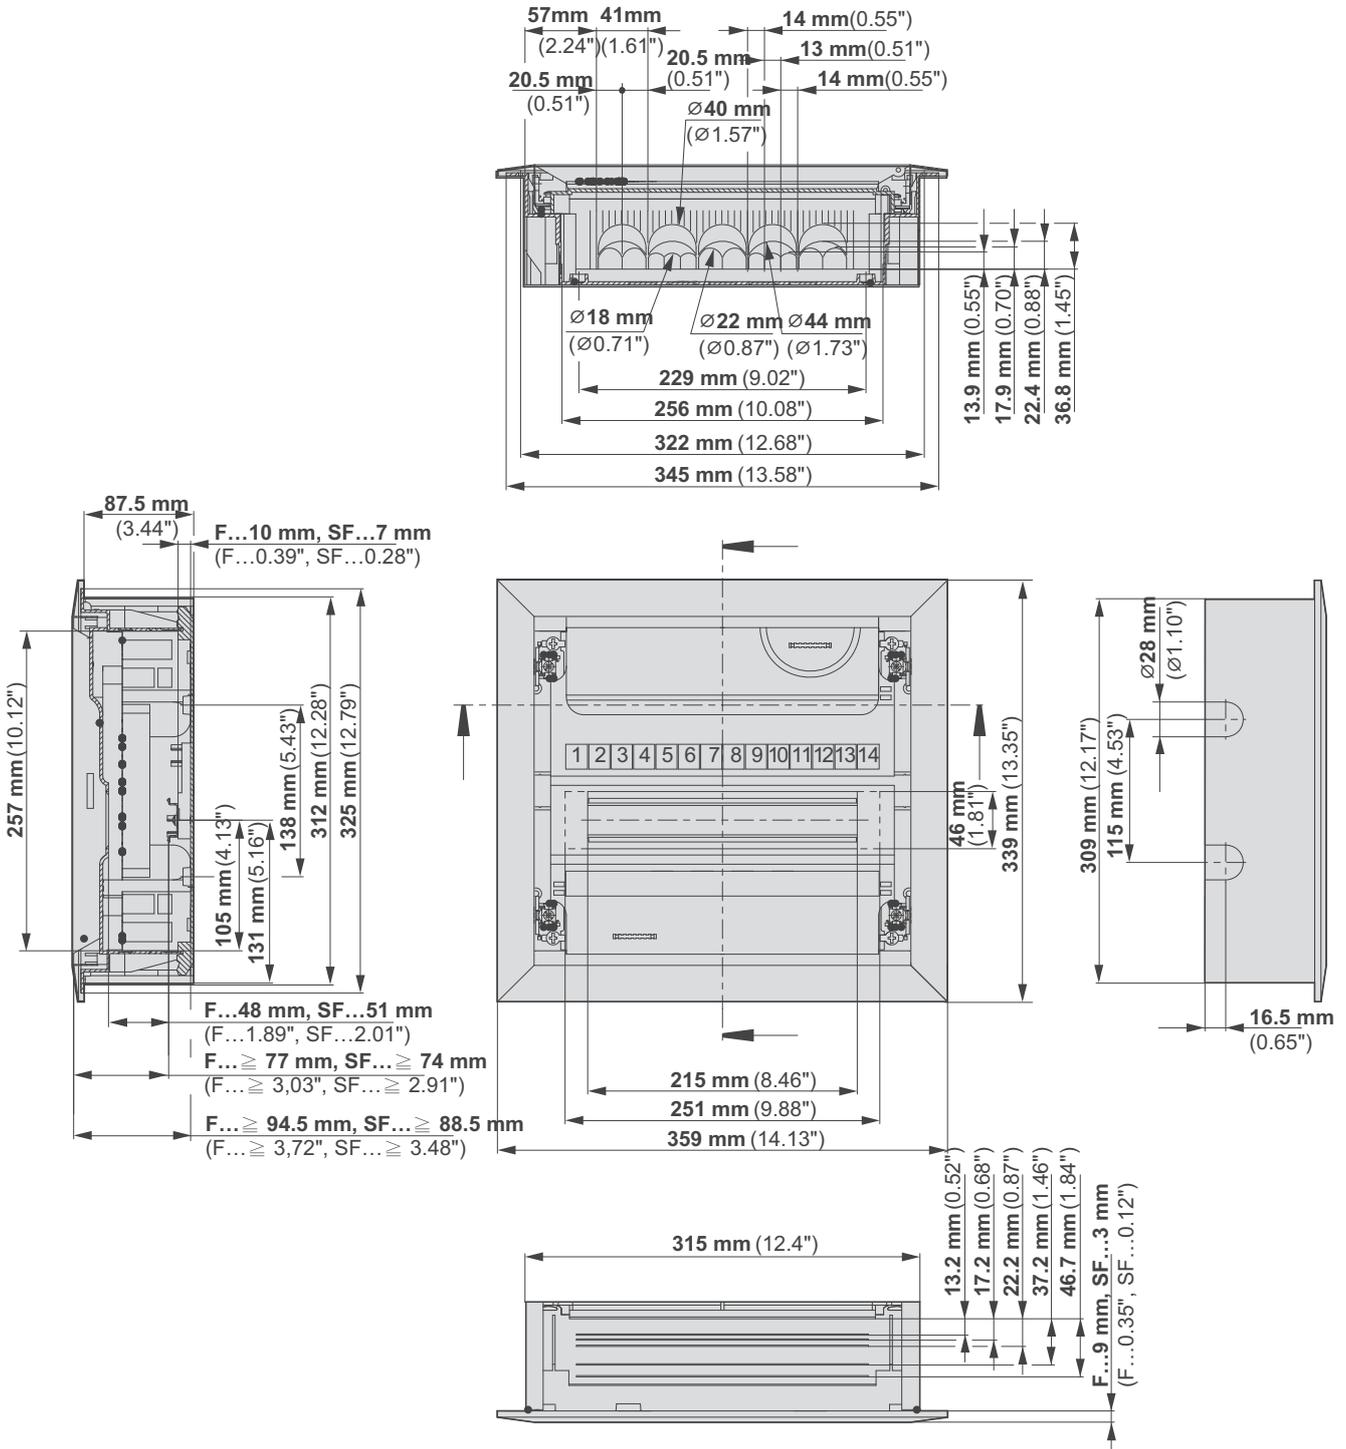

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30


Dimensions (mm)

KLV-36...

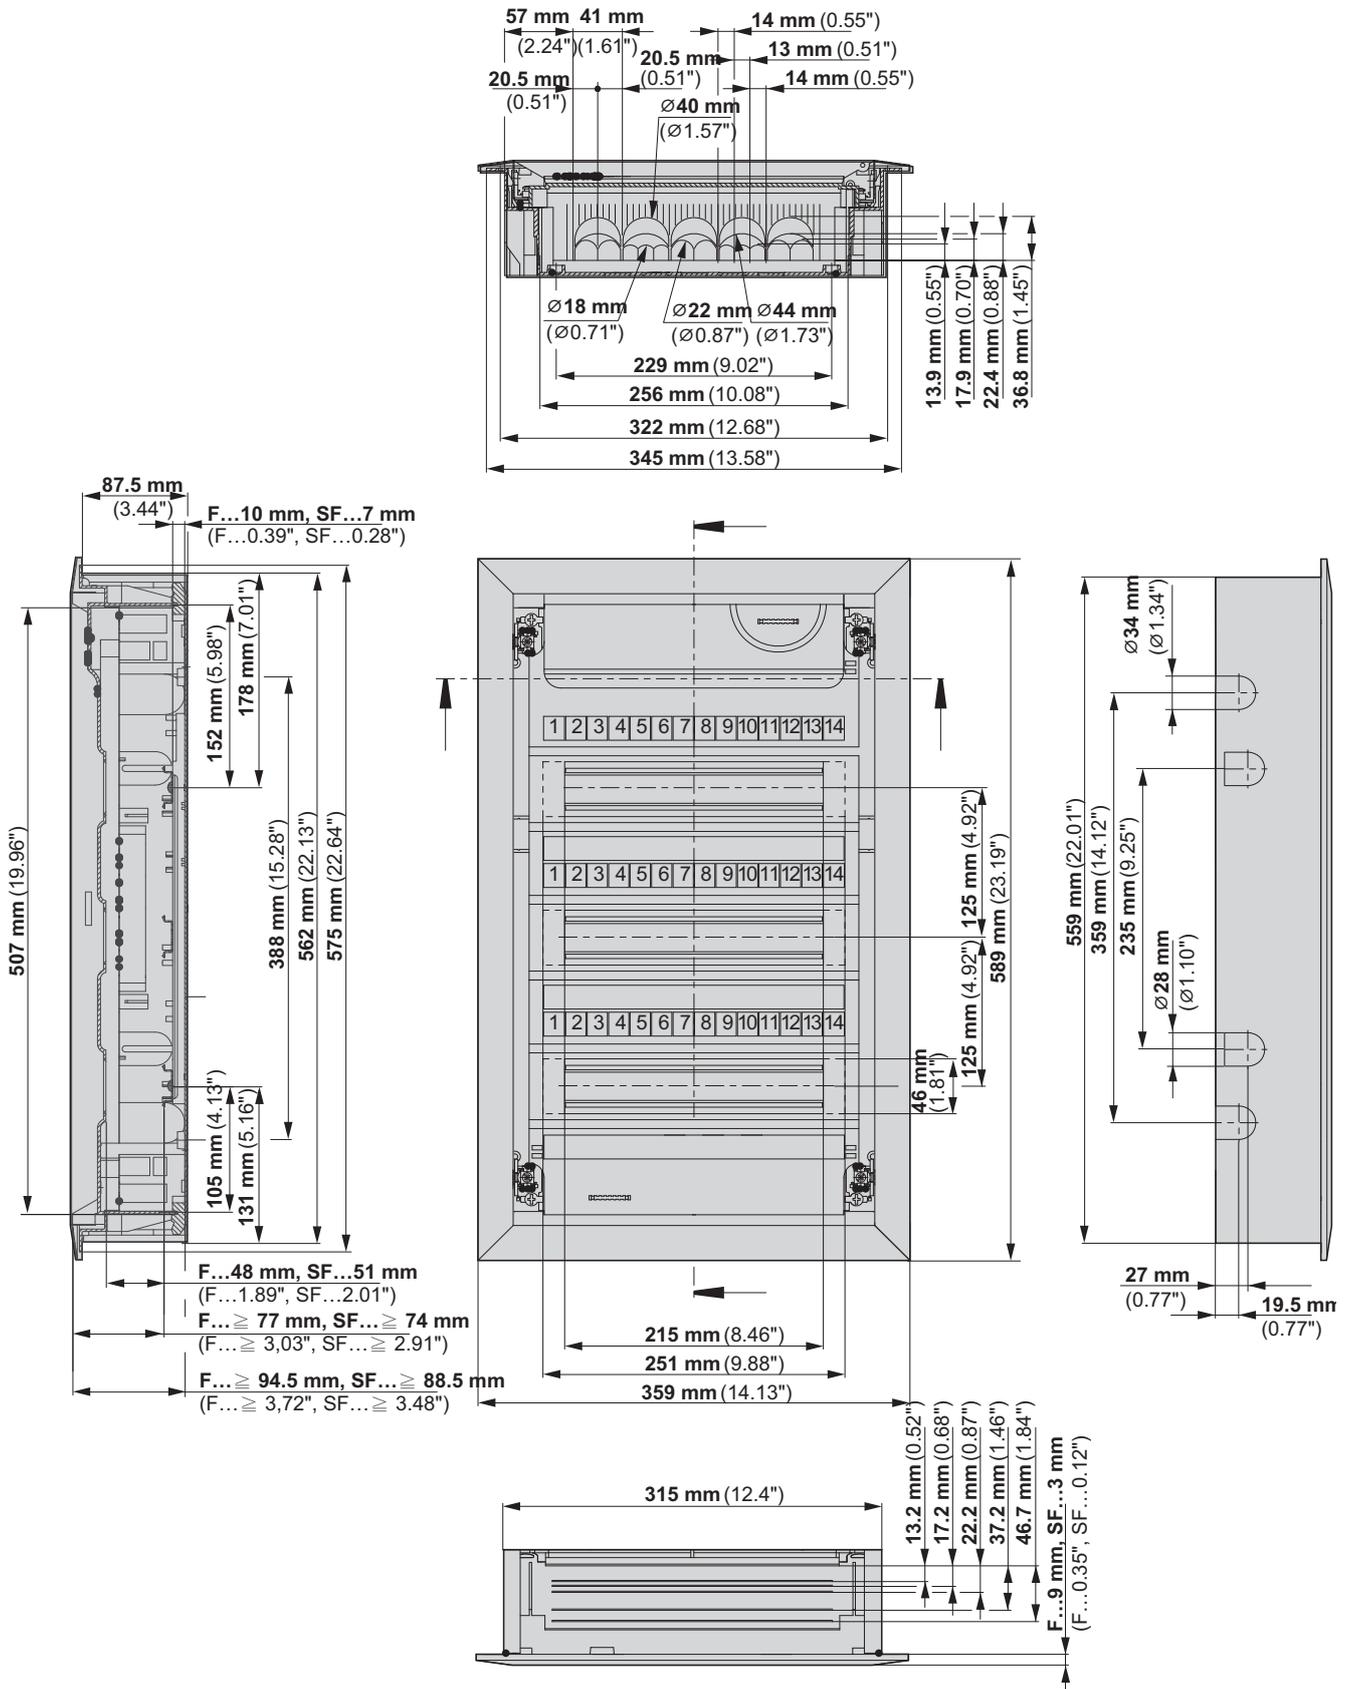

KLV Flush-mounted/Hollow-wall Compact Distribution Boards, IP30

Dimensions (mm)

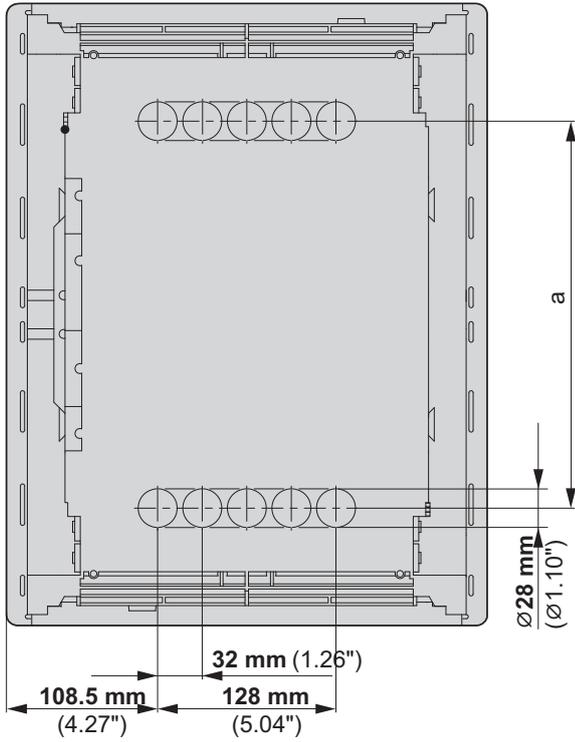

Type	a [mm]	a ["]
KLV-12...	155	6,10
KLV-24...	280	11,02
KLV-36...	405	15,94
KLV-48...	530	20,87

IKA Surface-mounted Compact Distribution Boxes, IP65

VT25314



IKA...-UV ; IKA...-ST and IKA...-OT

- Degree of protection IP65
- Protection class II, totally insulated
- Industrial version (PC) or PRO/Standard version (ABS)
- 1 to 3 rows, 12 and 18 module units
- Mini module with 4, 6 and 8 MU
- Glow wire test 850°C or 650°C

VT24814



- CNC foamed sealing
- Fully removable DIN support rack
- Up to 46 mm wiring area under the DIN rail
- Module tolerance compensation in the cover
- Possibility of direct fixing on the wall
- Depth-adjustable DIN rail
- Neutral and protective conductor terminals

VT24614



- Fast and easy inversion of the door hinges
- Pre-punched metric areas for cable entries
- Intuitive locking and unlocking of the door
- Body RAL 7035, door transparent
- Halogen-free

IKA Compact Distribution Boxes

Type Code

IKA	-	2	/	24	S	T	-	UV
Insulation material	-	Rows	/	Module units	Version	Version	-	Material
Compact distribution boxes		Number		MU	Indoor	Door		
Surface-mounted		1		4	S = Screw-type terminal	T = transparent		UV = UV resistant
		2		6	O = without terminal	R = RAL		„_“ = Standard
		3		8				
				12				
				24				
				36				
				18				
				36				
				54				

IKA System Overview

Compact DB Version	Protection class II (totally insulated)	Complies with European Standard EN 62208	IP65	RAL 7035	N/PE terminals	Doors transparent	Outdoor (UV resistant, ISO 4892-2)
Industrial	■	■ ¹⁾	■	■ ²⁾	■	■ ³⁾	■ ⁴⁾
Professional	■	■ ¹⁾	■	■ ²⁾	■	■	-
Standard	■	■ ¹⁾	■	■ ²⁾	-	■	-

¹⁾ Pre-requisite for building distribution boxes from empty enclosures according to IEC/EN 61439-3

²⁾ Body and cover frame, door is transparent

³⁾ Doors non-transparent in RAL7035 available upon request

⁴⁾ Eaton nevertheless recommends not to expose the product to direct solar radiation

IKA Overview of Scope of Delivery

	IKA-...-UV (Industrial)	IKA-...-ST (Professional)	IKA-...-OT (Standard)
Bottom part (PC)	■	-	-
Bottom part (ABS)	-	■	■
Cover frame (PC)	■	-	-
Cover frame (ABS)	-	■	■
Door (PC)	■	■	■
Removable DIN support rack	■ ¹⁾	■ ¹⁾	■ ¹⁾
N/PE screw-type terminal IP2X	■	■	-
Cover for spare areas 6 MU	■	■	-
Closing screws, sealable	■	■	■
Closing caps	■	■	■
Labelling of power circuits	■	■	■

PC: Polycarbonate

ABS: Acrylonitrile butadiene styrene

¹⁾ For compact distribution boxes containing several rows only



VT25614



VT25814



VT26014

IKA-...UV Industrial Compact Distribution Boxes

IP 65 (IK 08)



- Surface-mounted
- Protection class II, totally insulated
- Industrial version completely made of high-quality polycarbonate, UV resistant according to ISO 4892-2
- 1 to 3 rows, 12 and 18 module units
- Mini modules with 4, 6 and 8 MU
- Completely removable DIN support rack in distribution boxes containing several rows
- Up to 46mm space under the DIN rail to allow for convenient laying of the cables
- Module tolerance compensation integrated in the cover frame
- Possibility of direct fixing on the wall, without the need of drilling holes into the enclosure
- Depth-adjustable DIN rail, 150 mm distance between the rows
- Neutral and protective conductor terminals, IP2X protection against insertion of fingers, with solid screw-technology
- Easy and fast inversion of door hinges
- Side panels with pre-punched metric areas for cable entries
- Intuitive locking and unlocking of doors, cylinder lock optionally with accessories
- Body RAL 7035, door transparent
- Glow wire test 850°C
- Halogen-free

	Rows / MU	Description	Door	Type designation	Article No.	Pack (pcs.)
Mini MU						
VT25314, VT24414 	1 / 4	with 1x N/PE screw termin.	transp.	IKA-1/4-ST-UV	174187	1
		3x 6 + 1x 10 mm ² each and 1x 35 mm ² each	RAL	IKA-1/4-SR-UV ¹⁾	174212	1
VT25214, VT24314 	1 / 6	with 1x N/PE screw termin.	transp.	IKA-1/6-ST-UV	174188	1
		3x 6 + 1x 10 mm ² each and 1x 35 mm ² each	RAL	IKA-1/6-SR-UV ¹⁾	174213	1
VT25114, VT24114 	1 / 8	with 1x N/PE screw termin.	transp.	IKA-1/8-ST-UV	174189	1
		5x 6 + 3x 10 mm ² each and 1x 35 mm ² each	RAL	IKA-1/8-SR-UV ¹⁾	174214	1
12 MU in each row						
VT25014, VT24214 	1 / 12	with 1x N/PE screw termin.	transp.	IKA-1/12-ST-UV	174190	1
		6x 6 + 6x 10 mm ² each and 1x 25 + 1x 35 mm ² each	RAL	IKA-1/12-SR-UV ¹⁾	174215	1
VT24814, VT24014 	2 / 24	with 1x N/PE screw termin.	transp.	IKA-2/24-ST-UV	174191	1
		8x 6 + 8x 10 mm ² each and 1x 25+1x 35 mm ² each	RAL	IKA-2/24-SR-UV ¹⁾	174216	1
VT24614, VT23814 	3 / 36	with 2x N/PE screw termin.	transp.	IKA-3/36-ST-UV	174192	1
		12x 6 + 12x 10 mm ² each and 1x 25+1x 35 mm ² each	RAL	IKA-3/36-SR-UV ¹⁾	174217	1

	Rows / MU	Description	Door	Type designation	Article No.	Pack (pcs.)
18 MU in each row						
VT24914, VT23914 	1 / 18	with 1x N/PE screw termin. 8x 6 + 8x 10 mm ² each and 1x 25+1x 35 mm ² each	transp.	IKA-1/18-ST-UV	174193	1
			RAL	IKA-1/18-SR-UV ¹⁾	174218	1
VT24714, VT23714 	2 / 36	with 2x N/PE screw termin. 12x 6 + 12x 10 mm ² each and 1x 25 + 1x 35 mm ² each	transp.	IKA-2/36-ST-UV	174194	1
			RAL	IKA-2/36-SR-UV ¹⁾	174219	1
VT24514, VT23614 	3 / 54	with 2x N/PE screw termin. 12x 6 + 12x 10 mm ² each and 1x 25+1x 35 mm ² each	transp.	IKA-3/54-ST-UV	174195	1
			RAL	IKA-3/54-SR-UV ¹⁾	174220	1

¹⁾ Available upon request

IKA-...ST Professional Compact Distribution Boxes

IP 65 (IK 08)



- Surface-mounted
- Protection class II, totally insulated
- Professional version: Body made of ABS, door made of polycarbonate
- 1 to 3 rows, 12 and 18 module units
- Mini modules with 4, 6 and 8 MU
- Neutral and protective conductor terminals, IP2X protection against insertion of fingers, with solid screw-technology
- Completely removable DIN support rack in distribution boxes containing several rows
- Up to 46mm space under the DIN rail to allow for convenient laying of the cables
- Module tolerance compensation integrated in the cover frame
- Possibility of direct fixing on the wall, without the need of drilling holes into the enclosure
- Depth-adjustable DIN rail, 150 mm distance between the rows
- Easy and fast inversion of door hinges
- Side panels with pre-punched metric areas for cable entries
- Intuitive locking and unlocking of doors, cylinder lock optionally with accessories
- Body RAL 7035, door transparent
- Glow wire test 650°C
- Halogen-free

	Rows / MU	Description	Door	Type designation	Article No.	Pack (pcs.)
Mini MU						
VT25314 	1 / 4	with 1x N/PE screw termin. 3x 6 + 1x 10 mm ² each and 1x 35 mm ² each	transp.	IKA-1/4-ST	174221	1
VT25214 	1 / 6	with 1x N/PE screw termin. 3x 6 + 1x 10 mm ² each and 1x 35 mm ² each	transp.	IKA-1/6-ST	174222	1
VT25114 	1 / 8	with 1x N/PE screw termin. 5x 6 + 3x 10 mm ² each and 1x 35 mm ² each	transp.	IKA-1/8-ST	174196	1
12 MU in each row						
VT25014 	1 / 12	with 1x N/PE screw termin. 6x 6 + 6x 10 mm ² each and 1x 25 + 1x 35 mm ² each	transp.	IKA-1/12-ST	174197	1
VT24814 	2 / 24	with 1x N/PE screw termin. 8x 6 + 8x 10 mm ² each and 1x 25 + 1x 35 mm ² each	transp.	IKA-2/24-ST	174198	1
VT24614 	3 / 36	with 2x N/PE screw termin. 12x 6 + 12x 10 mm ² each and 1x 25 + 1x 35 mm ² each	transp.	IKA-3/36-ST	174199	1

Compact Distribution Boxes

xComfort

	Rows / MU	Description	Door	Type designation	Article No.	Pack (pcs.)
18 MU in each row						
 <p>VT24914</p>	1 / 18	with 1x N/PE screw termin. 8x 6 + 8x 10 mm ² each and 1x 25 + 1x 35 mm ² each	transp.	IKA-1/18-ST	174200	1
 <p>VT24714</p>	2 / 36	with 2x N/PE screw termin. 12x 6 + 12x 10 mm ² each and 1x 25 + 1x 35 mm ² each	transp.	IKA-2/36-ST	174201	1
 <p>VT24514</p>	3 / 54	with 2x N/PE screw termin. 12x 6 + 12x 10 mm ² each and 1x 25 + 1x 35 mm ² each	transp.	IKA-3/54-ST	174202	1

Standard IKA-...OT Compact Distribution Boxes

IP 65 (IK 08)



- Surface-mounted
- Protection class II, totally insulated
- Standard version: Body made of ABS, door made of polycarbonate
- No neutral and protective conductor terminals, no cover for spare areas
- 1 to 3 rows, 12 and 18 module units
- Mini modules with 4, 6 and 8 module units
- Completely removable DIN support rack in distribution boxes containing several rows
- Up to 46mm space under the DIN rail to allow for convenient laying of the cables
- Module tolerance compensation integrated in the cover frame
- Possibility of direct fixing on the wall, without the need of drilling holes into the enclosure
- Depth-adjustable DIN rail, 150 mm distance between the rows
- Easy and fast inversion of door hinges
- Side panels with pre-punched metric areas for cable entries
- Intuitive locking and unlocking of doors, cylinder lock optionally with accessories
- Body RAL 7035, door transparent
- Glow wire test 650°C
- Halogen-free

	Rows / MU	Description	Door	Type designation	Article No.	Pack (pcs.)
Mini MU						
VT25314 	1 / 4	no neutral and protective conductor terminals, no cover for spare areas	transp.	IKA-1/4-OT	174203	1
VT25214 	1 / 6	no neutral and protective conductor terminals, no cover for spare areas	transp.	IKA-1/6-OT	174204	1
VT25114 	1 / 8	no neutral and protective conductor terminals, no cover for spare areas	transp.	IKA-1/8-OT	174205	1
12 MU in each row						
VT25014 	1 / 12	no neutral and protective conductor terminals, no cover for spare areas	transp.	IKA-1/12-OT	174206	1
VT24814 	2 / 24	no neutral and protective conductor terminals, no cover for spare areas	transp.	IKA-2/24-OT	174207	1
VT24614 	3 / 36	no neutral and protective conductor terminals, no cover for spare areas	transp.	IKA-3/36-OT	174208	1

Compact Distribution Boxes

xComfort

	Rows / MU	Description	Door	Type designation	Article-No.	Pack (pcs.)
18 MU in each row						
 <p>VT24914</p>	1 / 18	no neutral and protective conductor terminals, no cover for spare areas	transp.	IKA-1/18-OT	174209	1
 <p>VT24714</p>	2 / 36	no neutral and protective conductor terminals, no cover for spare areas	transp.	IKA-2/36-OT	174210	1
 <p>VT24514</p>	3 / 54	no neutral and protective conductor terminals, no cover for spare areas	transp.	IKA-3/54-OT	174211	1

Legend IKA

Symbol	Explanation
	Totally insulated, according to EN 60670-24.
	Only for indoor applications.
	For indoor applications and outdoor applications. Outdoor use under canopy is recommended.
	Final product UV resistant according ISO 4892-2.
	Resistance to abnormal heat and fire according IEC/EN 62208.

Technical Data for IKA

	Unit	
Electrical		
Versions according to		IEC/EN 62208; IEC/EN 60670-24
Degree of protection		IP65 (IK08) according to EN 60529
Protection class		II, totally insulated
Rated voltage	V	415 AC
Insulation voltage	V	1000 AC, 1500 DC
Max. power loss admitted for all devices installed in the distribution box, at a difference in temperature of 25°K:		
1/4	W	14.7
1/6	W	16.5
1/8	W	18.7
1/12	W	26.0
2/24	W	39.1
3/36	W	49.2
1/18	W	35.3
2/36	W	47.6
3/54	W	59.6
Mechanical		
Material:		
Enclosure		Polycarbonate (Industry), ABS (Professional, Standard)
Door		Polycarbonate
Colour of the enclosure		grey RAL 7035
Colour of the door		transparent; grey RAL 7035
Distance between the rows	mm	150
Support rail for devices		DIN rail 35 x 7.5 mm sheet steel, galvanized
UV resistance		all IKA...-UV resistant according to ISO 4892-2
Type of installation		
IKA-...-UV		Indoor or Outdoor, under canopy, surface-mounted
IKA-...-ST		Indoor, surface-mounted
IKA-...-OT		Indoor, surface-mounted
Halogene-free, RoHs		yes
Pre-punched metric areas		
IKA-1/4...., IKA-1/6....		Top: 2xM25 + 1xM40 Bottom: 2xM25 + 1xM40 Rear panel: 2x(2xM25)
IKA-1/8....		Top: 4xM25 + 1xM40 Bottom: 4xM25 + 1xM40 Rear panel: 2x(2xM25)
IKA-1/12....		Top: 6xM20 + 2xM25 + 2xM32 + 1xM40 Bottom: 6xM20 + 2xM25 + 2xM32 + 1xM40 Side panel: 4xM25 Rear panel: 2x(1xM25 + 1xM32 + 1xM25)
IKA-2/24....		Top: 6xM20 + 2xM25 + 2xM32 + 1xM40 Bottom: 6xM20 + 2xM25 + 2xM32 + 1xM40 Side panel: 4xM25 Rear panel: 2x(1xM25 + 1xM32 + 1xM25)
IKA-3/36....		Top: 6xM20 + 2xM25 + 2xM32 + 1xM40 Bottom: 6xM20 + 2xM25 + 2xM32 + 1xM40 Side panel: 4xM25 Rear panel: 2x(1xM25 + 1xM32 + 1xM25)
IKA-1/18...., IKA-2/36...., IKA-3/54....		Top: 12xM20 + 6xM25 + 2xM32 + 1xM40 Bottom: 12xM20 + 6xM25 + 2xM32 + 1xM40 Side panel: 4xM25 Rear panel: 2x(1xM25 + 1xM32 + 1xM25)

Technical Data IKA

Max. connection cross-sections and equipment of N/PE screw terminals

	N [mm ²]	PE [mm ²]
IKA-1/4....	3x 2.5-6 + 1x 4-10+ 1x 16-35	3x 2.5-6 + 1x 4-10+ 1x 16-35
IKA-1/6....	3x 2.5-6 + 1x 4-10+ 1x 16-35	3x 2.5-6 + 1x 4-10+ 1x 16-35
IKA-1/8....	5x 2.5-6 + 3x 4-10+ 1x 16-35	5x 2.5-6 + 3x 4-10+ 1x 16-35
IKA-1/12....	6x 2.5-6 + 6x 4-10+ 1x 10-25+ 1x 16-35	6x 2.5-6 + 6x 4-10+ 1x 10-25+ 1x 16-35
IKA-2/24....	8x 2.5-6 + 8x 4-10+ 1x 10-25+ 1x 16-35	8x 2.5-6 + 8x 4-10+ 1x 10-25+ 1x 16-35
IKA-3/36....	12x 2.5-6 + 12x 4-10+ 1x 10-25+ 1x 16-35	12x 2.5-6 + 12x 4-10+ 1x 10-25+ 1x 16-35
IKA-1/18....	8x 2.5-6 + 8x 4-10+ 1x 10-25+ 1x 16-35	8x 2.5-6 + 8x 4-10+ 1x 10-25+ 1x 16-35
IKA-2/36....	12x 2.5-6 + 12x 4-10+ 1x 10-25+ 1x 16-35	12x 2.5-6 + 12x 4-10+ 1x 10-25+ 1x 16-35
IKA-3/54....	12x 2.5-6 + 12x 4-10+ 1x 10-25+ 1x 16-35	12x 2.5-6 + 12x 4-10+ 1x 10-25+ 1x 16-35

Note: Tightening torque values [Nm] of the N/PE screw terminals are directly indicated on the terminal enclosure.

IKA-C Surface-mounted Compact Distribution Boxes, IP65

VT33716



IKA-...-C

- Degree of protection IP65
- Protection class II, totally insulated
- Plastic ABS
- 1 row, 12 and 18 module units
- Glow wire test 650°C
- CNC foamed sealing
- Up to 46 mm wiring area under the DIN rail
- Module tolerance compensation in the cover
- Possibility of direct fixing on the wall
- Depth-adjustable DIN rail
- Neutral and protective conductor terminals
- Fast and easy inversion of the door hinges
- Pre-punched metric areas for cable entries
- Intuitive locking and unlocking of the door
- Individual assembly with RMQ command and signaling devices and socket outlets
- Body RAL 7035, door transparent
- Halogen-free

VT34016



IKA-C Compact Distribution Boxes

Type Code

IKA-C	-	1	/	12	S	T	-	X
Insulation material	-	Rows	/	Module units	Version	Version	-	Version
Compact distribution boxes		Number		MU	Indoor	Door		Connect Plate
Surface-mounted		1		12	S = Screw-type terminal	T = transparent		X = free mounting option
				18				LID = splitted mounting option

IKA-C System Overview

Compact DB Version	Protection class II (totally insulated)	Complies with European Standard EN 62208	IP65	RAL 7035	N/PE terminals	Doors transparent
Profesional	■	■ ¹⁾	■	■ ²⁾	■	■

¹⁾ Pre-requisite for building distribution boxes from empty enclosures according to IEC/EN 61439-3

²⁾ Body and cover frame, door is transparent

IKA-C Overview of Scope of Delivery

	IKA-C-...-X	IKA-C-...-LID
Bottom part (PC)	-	-
Bottom part (ABS)	■	■
Cover frame (PC)	-	-
Cover frame (ABS)	■	■
Door (PC)	■	■
Removable DIN rail	■	■
N/PE screw-type terminal IP2X	■	■
Cover for spare areas	■	■
Closing screws, sealable	■	■
Closing caps	■	■
Labelling of power circuits	■	■
Complete connection plate	■	-
Splitted connection plate	-	■

PC: Polycarbonate

ABS: Acrylonitrile butadiene styrene

Rated Voltage AC: 1000 V

Rated Voltage DC: 1500 V



VT34016



VT33716

IKA-C... Compact Distribution Boxes

IP 65 (IK 08)



- Surface-mounted
- Protection class II, totally insulated
- Body manufactured from ABS, door made of polycarbonate
- 1 row, 12 and 18 module units
- Completely removable DIN rail
- Up to 46mm space under the DIN rail to allow for convenient laying of the cables
- Module tolerance compensation integrated in the cover frame
- Possibility of direct fixing on the wall, without the need of drilling holes into the enclosure
- Depth-adjustable DIN rail
- Mounting possibilities of SCHUKO socket outlets, CEE socket outlets, emergency stop switches, etc.
- Neutral and protective conductor terminals, IP2X protection against insertion of fingers, with solid screw-technology
- Easy and fast inversion of door hinges
- Side panels with pre-punched metric areas for cable entries
- Intuitive locking and unlocking of doors, cylinder lock optionally with accessories
- Body RAL 7035, door transparent
- Glow wire test 650°C
- Halogen-free

	Rows / MU	Description	Door	Type designation	Article No.	Pack (pcs.)
 <p>VT34016</p>	1 / 12	with 1x N/PE screw termin. 6x 4.5 + 6x 5.5 mm ² each and 1x 7.5 + 1x 8.5 mm ² each, without connection plate	transp.	IKA-C-1/12-ST-X	187356	1
 <p>VT33916</p>	1 / 12	with 1x N/PE screw termin. 6x 4.5 + 6x 5.5 mm ² each and 1x 7.5 + 1x 8.5 mm ² each, with individually replaceable connection plate	transp.	IKA-C-1/12-ST-LID	187357	1
 <p>VT33816</p>	1 / 18	with 1x N/PE screw termin. 8x 4.5 + 8x 5.5 mm ² each and 1x 7.5 + 1x 8.5 mm ² each, without connection plate	transp.	IKA-C-1/18-ST-X	187351	1
 <p>VT33716</p>	1 / 18	with 1x N/PE screw termin. 8x 4.5 + 8x 5.5 mm ² each and 1x 7.5 + 1x 8.5 mm ² each, with individually replaceable connection plate	transp.	IKA-C-1/18-ST-LID	187352	1

Technical Data for IKA-C

	Unit
Electrical	
Versions according to	IEC/EN 62208; IEC/EN 60670-24
Degree of protection	IP65 (IK08) according to EN 60529
Protection class	II, totally insulated
Rated voltage	V 415 AC
Insulation voltage	V 1000 AC, 1500 DC
Max. power loss admitted for all devices installed in the distribution box, at a difference in temperature of 25°K:	
1/12	W 39.1
1/18	W 47.6

Mechanical

Material:	
Enclosure	ABS
Door	Polycarbonate
Colour of the enclosure	grey RAL 7035
Colour of the door	transparent
Support rail for devices	DIN rail 35 x 7.5 mm sheet steel, galvanized
Type of installation	Indoor
Halogene-free, RoHs	yes

Pre-punched metric areas


IKA-C-1/12...	Top: 8xM20 + 2xM25 + 2xM32 + 1xM40 Bottom : 6xM20 + 2xM25 + 2xM32 + 1xM40 Side panel: 4xM25 Rear panel: 1xM25 + 1xM32 + 1xM25
IKA-C-1/18...	Top: 12xM20 + 6xM25 + 2xM32 + 1xM40 Bottom : 12xM20 + 6xM25 + 2xM32 + 1xM40 Side panel: 4xM25 Rear panel: 1xM25 + 1xM32 + 1xM25

Max. connection cross-sections and assembly of the N/PE screw terminal


IKA-C-1/12...	8x 4.5 + 8x 5.5 mm ² each and 1x 7.5 + 1x 8.5 mm ² each
IKA-C-1/18...	8x 4.5 + 8x 5.5 mm ² each and 1x 7.5 + 1x 8.5 mm ² each
Note: The tightening torque [Nm] of the N/PE screw terminals are directly noted on the terminal enclosure.	

Dimensions (mm)

IKA-1/4....

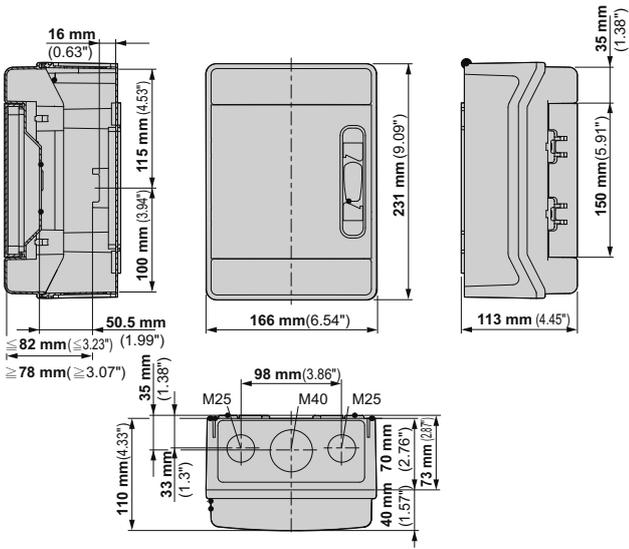


IKA-1/6....

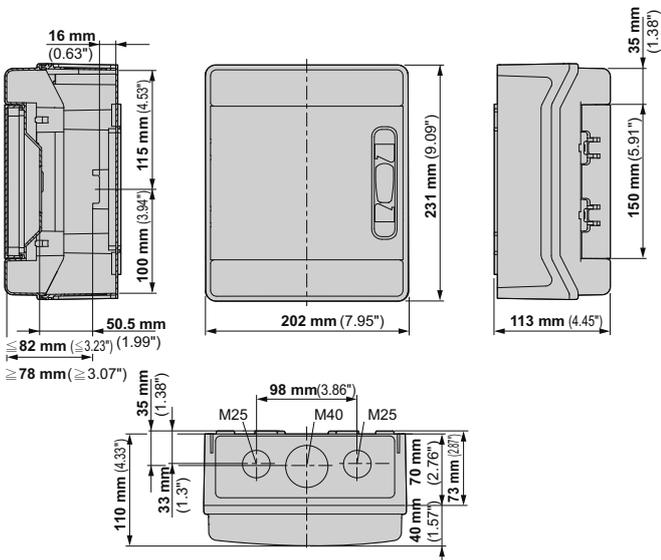


Dimensions (mm)

IKA-1/8....

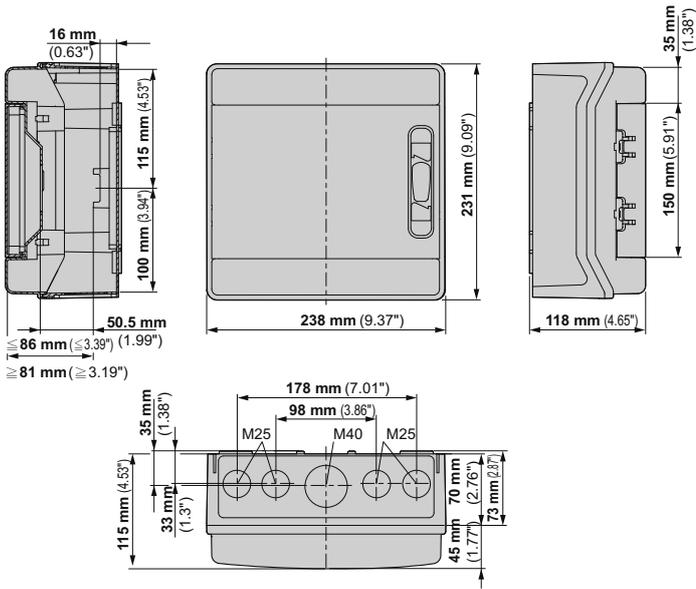


IKA-1/12....

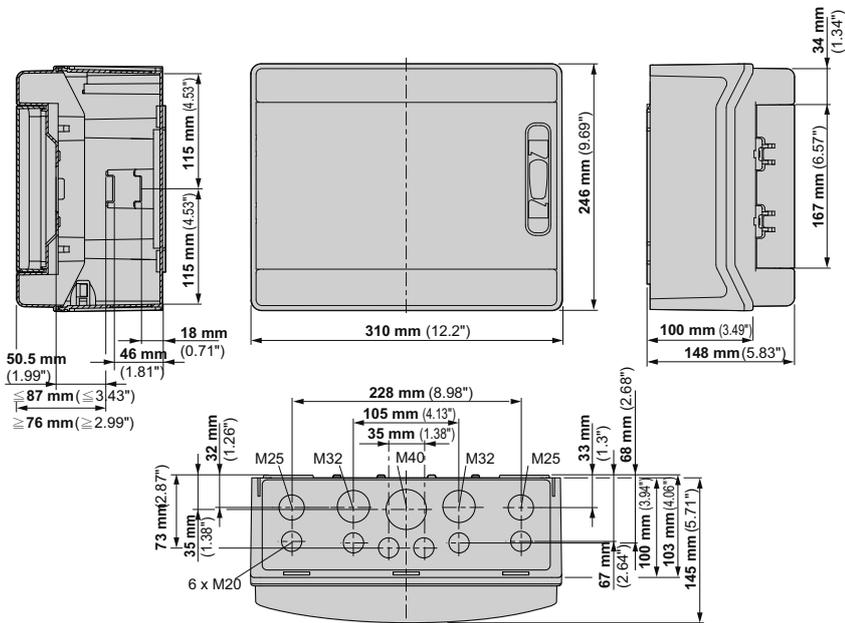


Dimensions (mm)

IKA-2/24....

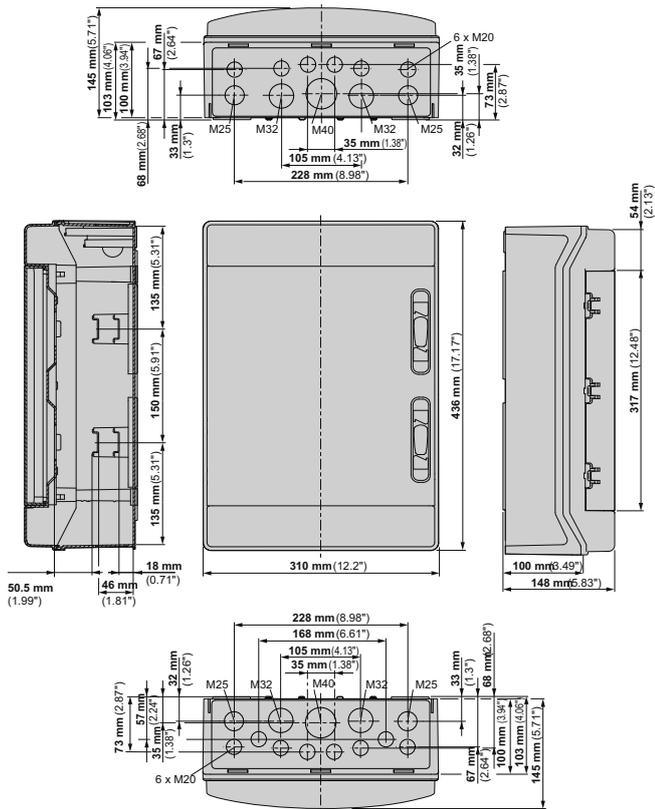


IKA-3/36....

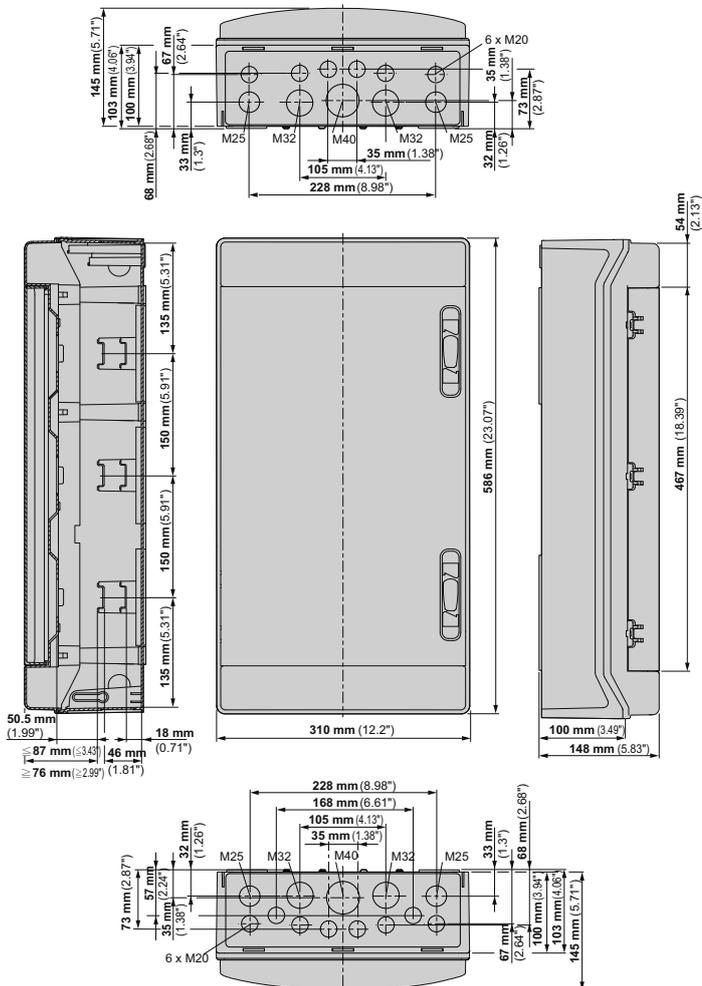


Dimensions (mm)

IKA-1/18....

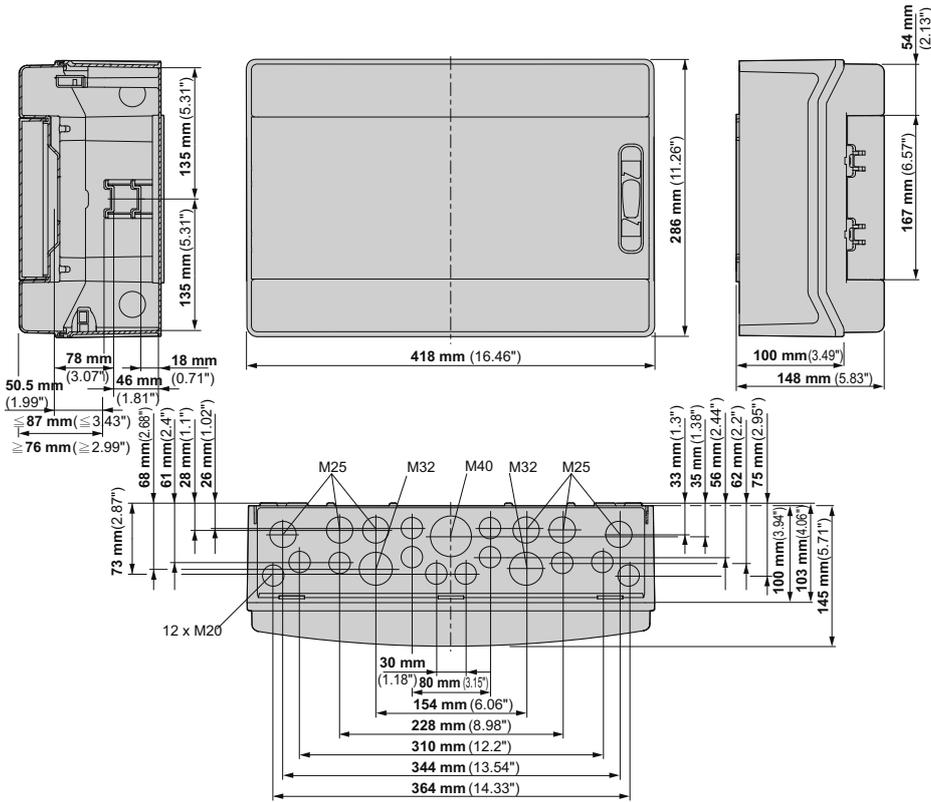


IKA-2/36....

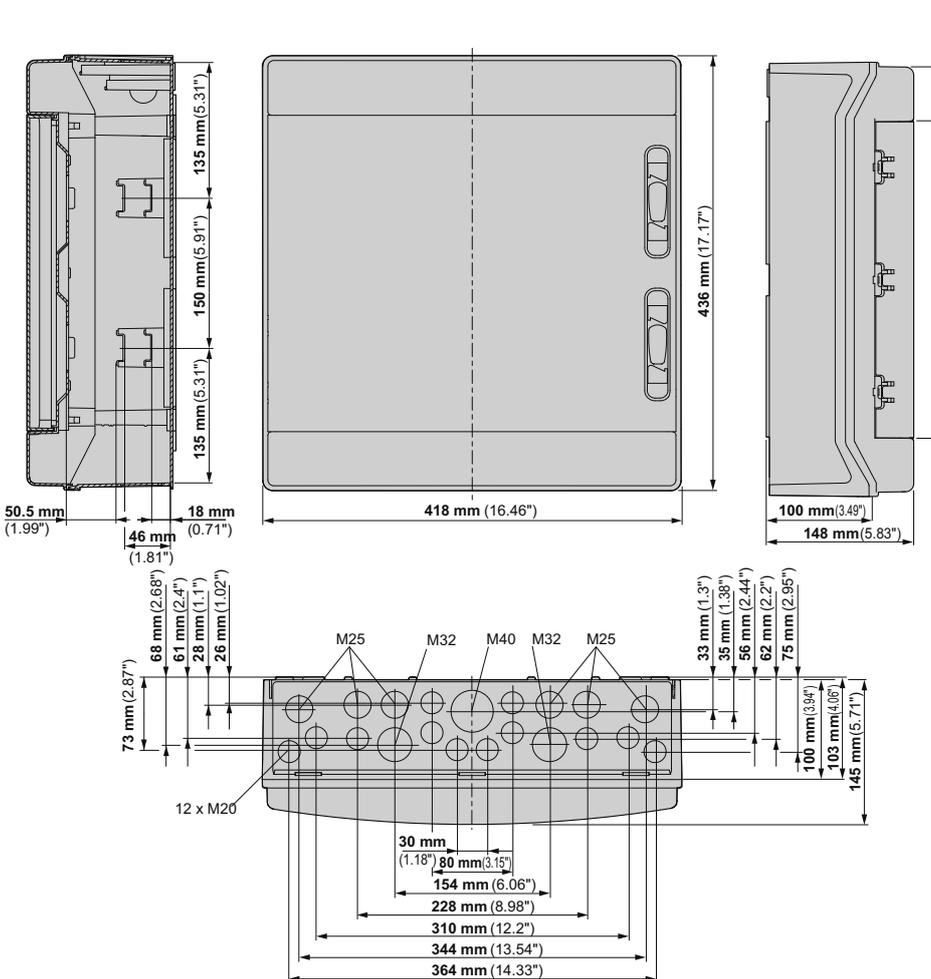


Dimensions (mm)

IKA-3/54....

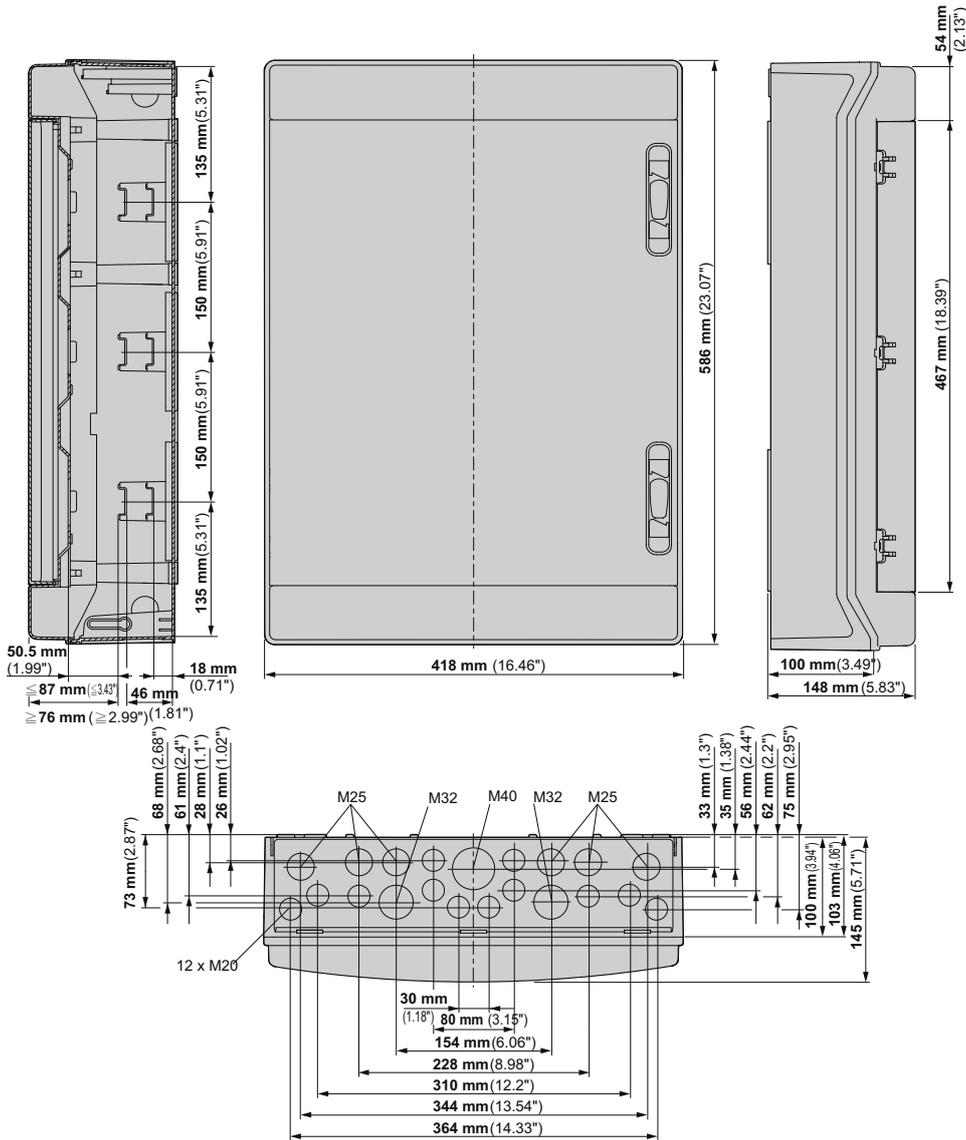

Dimensions (mm)


Holes for wall-mounting IKA-...

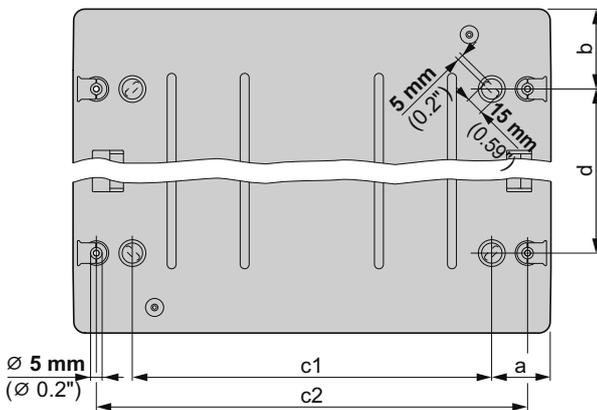


Type	a [mm]	b [mm]	c1 [mm]	c2 [mm]	d [mm]
IKA-1/4...	45	55	76	126	121
IKA-1/6...	52.5	55	97	162	121
IKA-1/8...	52.5	55	133	198	121
IKA-1/12...	51.5	62.5	207	270	121
IKA-2/24...	51.5	70.5	207	270	295
IKA-3/36...	51.5	70.5	207	270	445
IKA-1/18...	51.5	70.5	315	378	145
IKA-2/36...	51.5	70.5	315	378	295
IKA-3/54...	51.5	70.5	315	378	445

Dimensions (mm)

IKA-C-1/18-ST-X

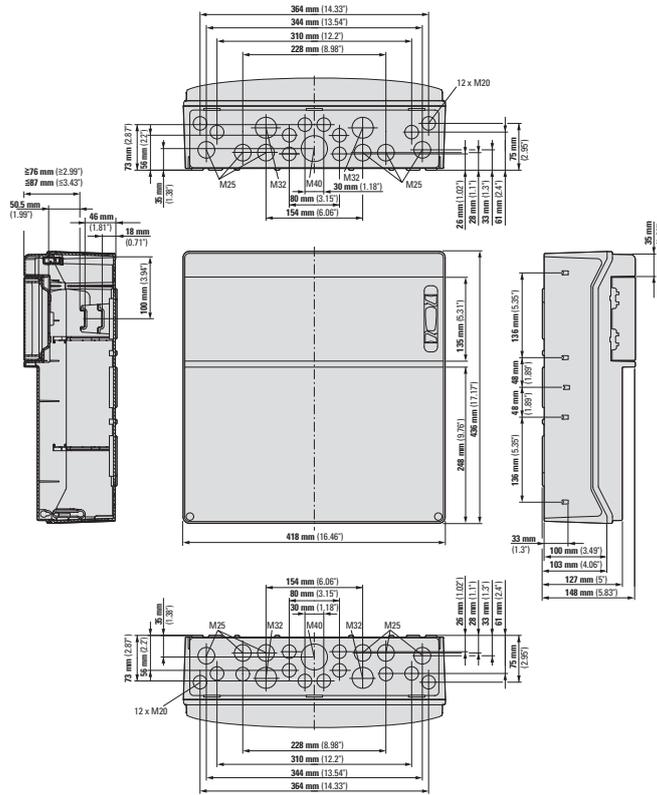

IKA-C-1/18-ST-LID

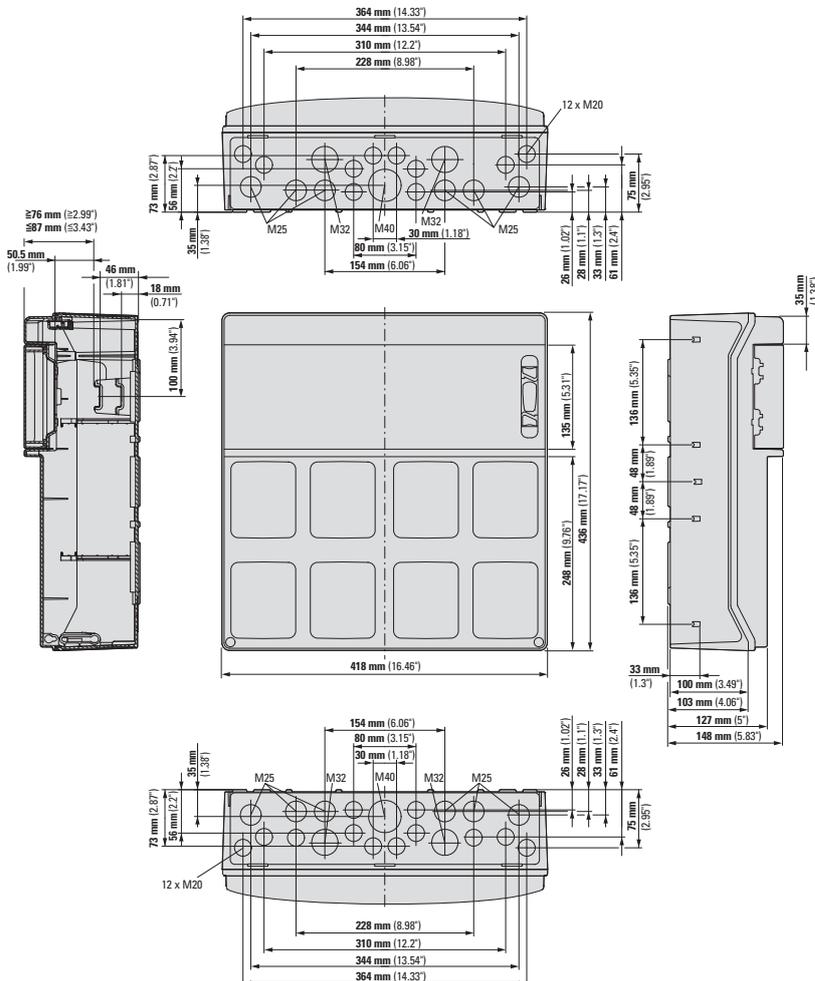

Multimedia Distribution Boards

vt14215




KLV-...UP and KLV-...HW

- 3 to 4 rows
- Hollow-wall and flush-mounted versions
- Flat and super flat door design
- Integrated spirit level
- 3D plaster compensation
- Top row carrier rail
- Micro-perforated mounting plate
- Cable holder
- Device holder
- 2-fold electricity socket
- Pre-punched cable entries, on all sides
- Degree of protection IP30
- Protection class II, fully insulated
- Door and cover frame, sheet steel RAL 9016
- Low halogen level
- IEC/EN 60670-24

Multimedia Distribution Boards Flush-mounted/Hollow-wall KLV-...UPM, KLV-...HWM

IP 30



- According to IEC/EN 60670-24
- Door with ventilation louvers and frame made of sheet steel
- 1 DIN carrier rail, e.g. for accommodating patch modules, 1 mounting plate with punch holes for fixing active and passive devices
- Device and cable holders for clear arrangement of devices
- 2-fold electricity socket incl. EURO2 adapter with plug-type terminal up to 2.5 mm²
- Suitable for equipment of up to 80 mm max. depth
- Wall pan made of plastic with integrated spirit level
- Cable guidance slide with snap-on fixing
- Door with frame made of sheet steel, with 3D plaster compensation (compensation possible up to 18 mm), colour RAL 9016, optionally flat (F) or super flat (SF)
- Easy inversion of door hinges, hinges for manual handling
- Flat rotary door closure, easy to replace by one of the lock versions
- Hollow-wall anchor for fixing in the hollow wall (hollow-wall mounting only)
- Nail straps for fixing at the wall (flush-mounting only)
- Connection brackets for linking wall pans in pairs or fixing them on flush-mounted or hollow-wall mounted compact distribution boards KLV-UP..., KLV-HW...
- Dimensions according to standard distribution boards KLV-UP..., KLV-HW...
- Dimensions of the distribution boards according to DIN 43871


	Rows / DIN / MPL	Description	Type designation	Article No.	Pack (pcs.)
Flush-mounting UPM					
vt14215 	3 / 12+2 / 1	1st row DIN carrier rail, 2nd and 3rd row w. micro-perforated metal mounting plate for telecommunication devices, 2-fold electricity socket	KLV-36UPM-F KLV-36UPM-SF	178830 178831	1/60 1/60
	vt14415 	4 / 12+2 / 1	1st row DIN carrier rail, 2nd to 4th row w. micro-perforated metal mounting plate for telecommunication devices, 2-fold electricity socket	KLV-48UPM-F KLV-48UPM-SF	178832 178833
Hollow-wall mounting HWM					
vt13915 	3 / 12+2 / 1	1st row DIN carrier rail, 2nd and 3rd row w. micro-perforated metal mounting plate for telecommunication devices, 2-fold electricity socket	KLV-36HWM-F KLV-36HWM-SF	178834 178835	1/60 1/60
	vt13715 	4 / 12+2 / 1	1st row DIN carrier rail, 2nd to 4th row w. micro-perforated metal mounting plate for telecommunication devices, 2-fold electricity socket	KLV-48HWM-F KLV-48HWM-SF	178836 178837

* Note: Technical data same as for KLV-UP..., KLV-HW...

Multimedia Distribution Board - Flush-mounted/Hollow-wall KLV-...UPM, KLV-...HWM

Dimensions (mm)


KLV-36...M-F (SF)

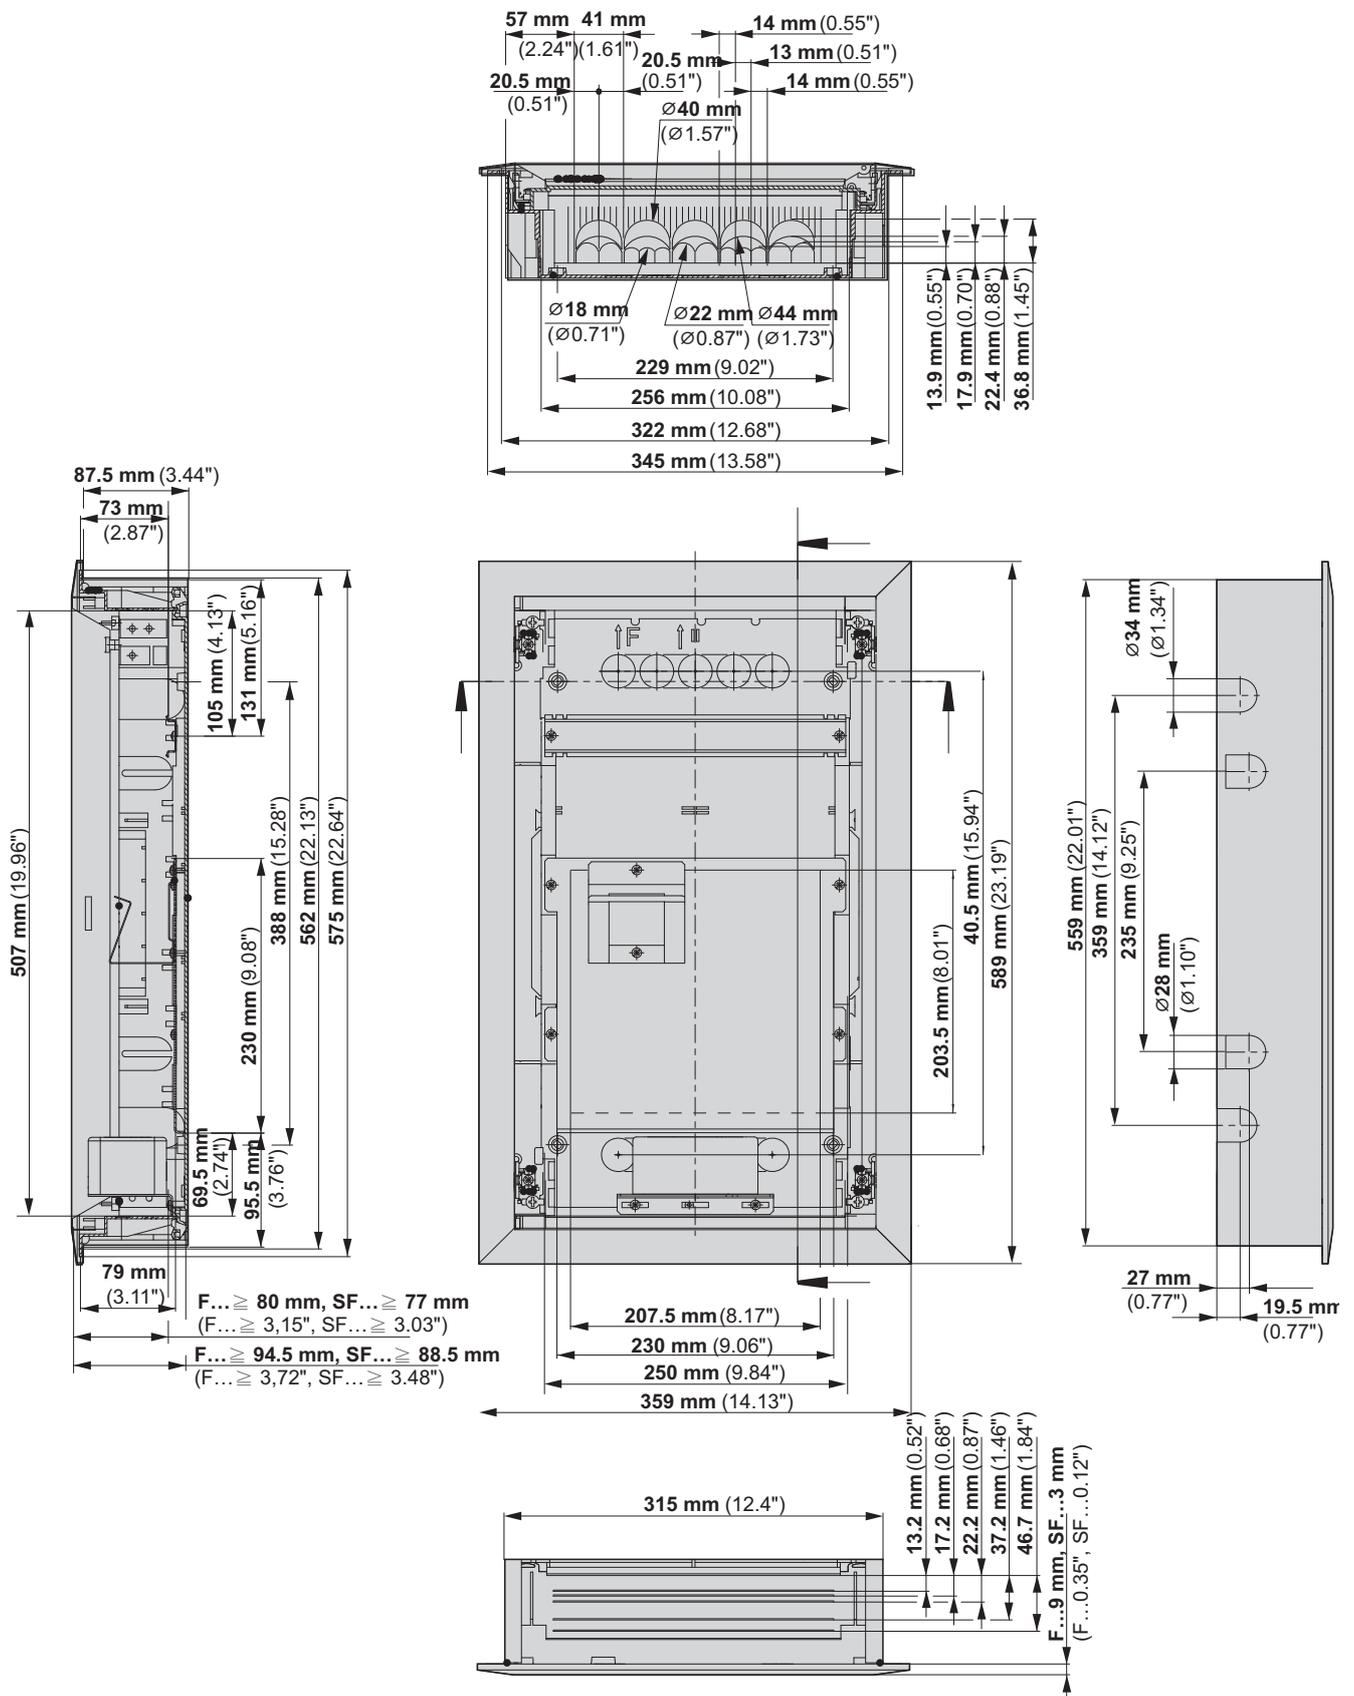

Multimedia Distribution Boards - Flush-mounted/Hollow-wall mounted KLV-...UPM, KLV-...HWM

Dimensions (mm)

KLV-48...M-F (SF)

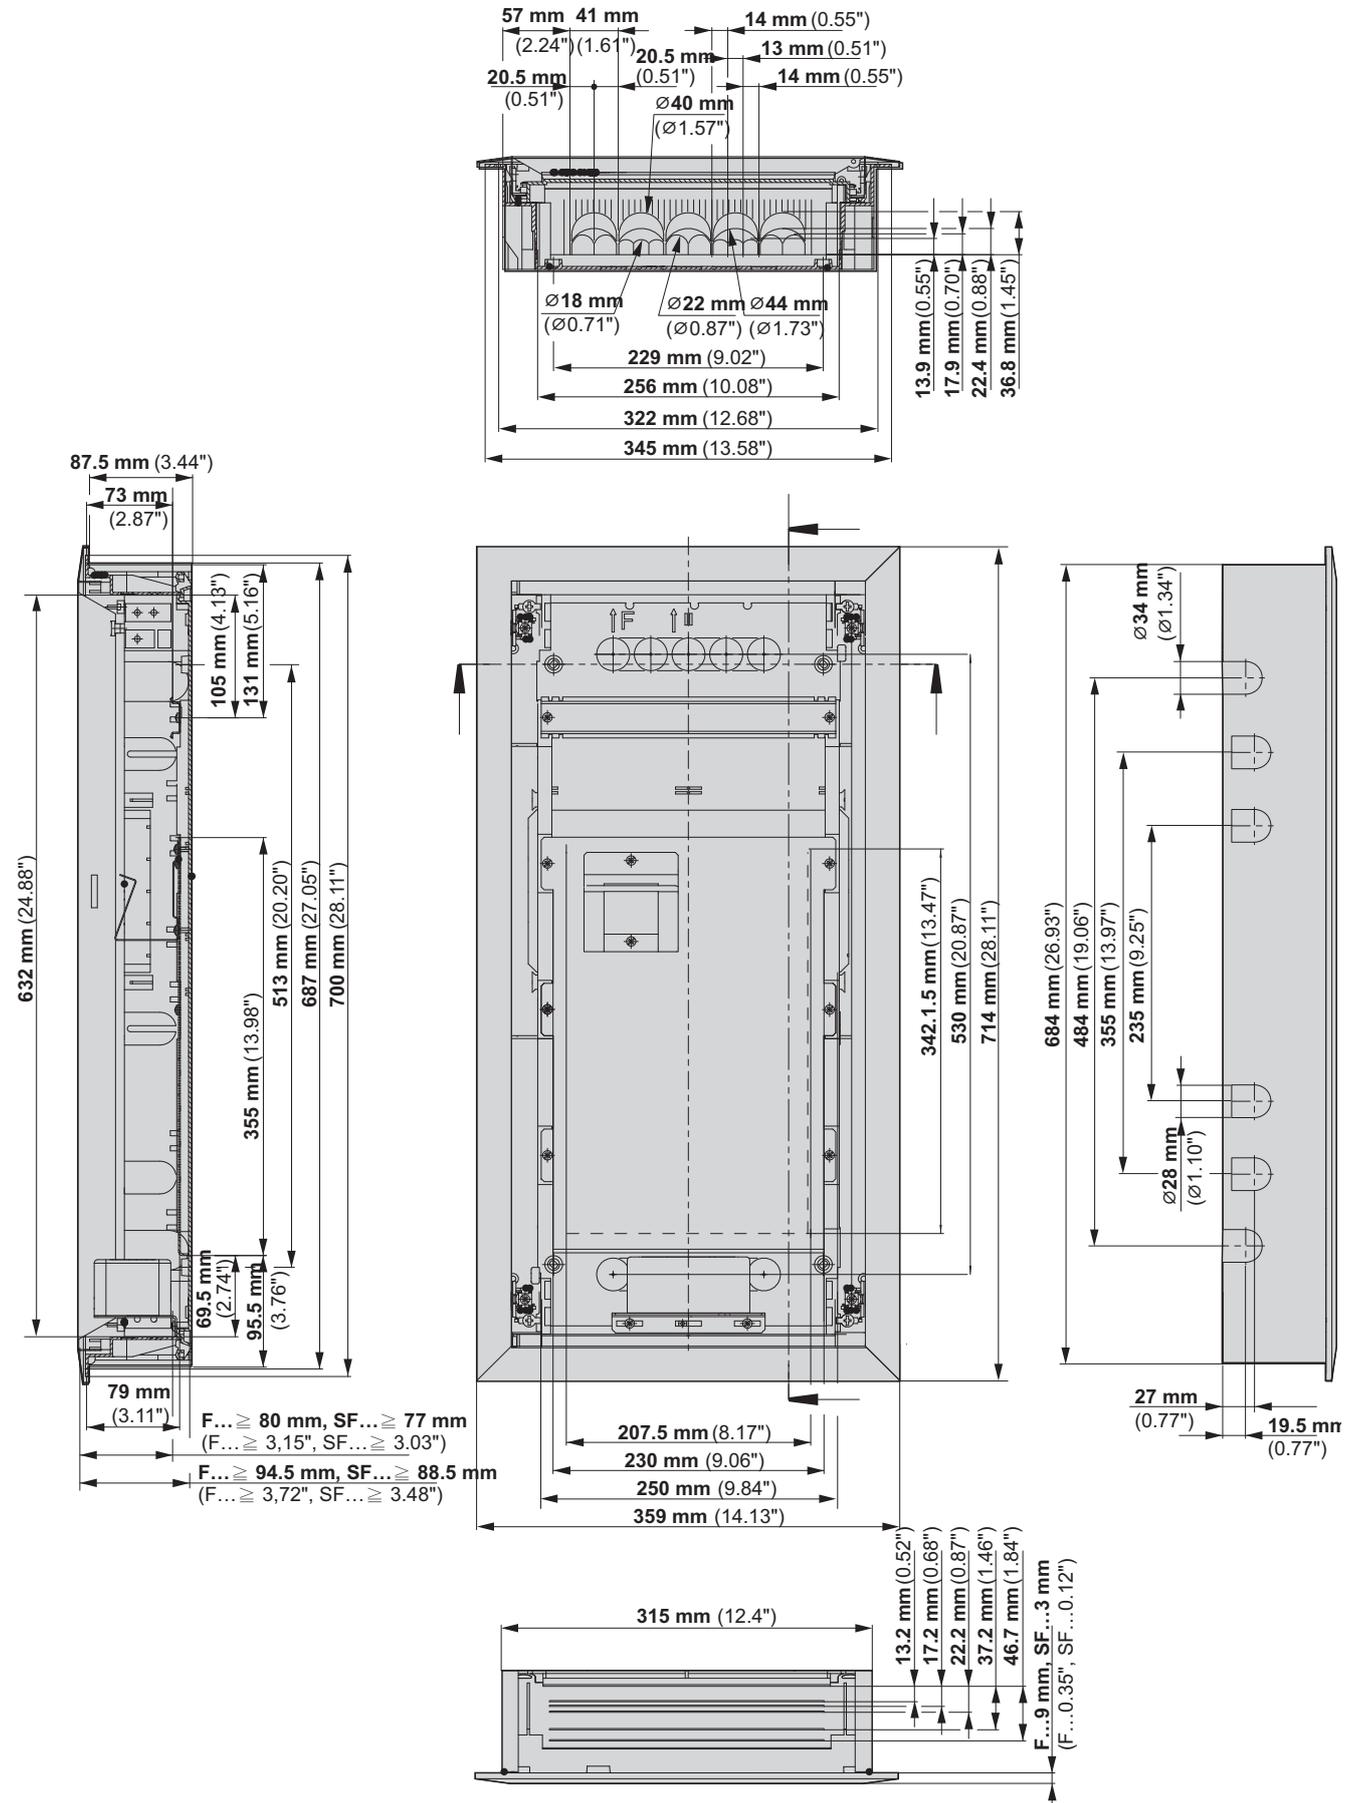

Compact DBs - Delivery Form for Projects

v117015



KLV-...-4PR

- Same content as flush-mounted/hollow-wall or multimedia distribution boards

- Delivery form optimized for projects

- Finish in 2 or 3 steps

v127615



- N/PE combined plug-type terminals

- Multimedia

- Door and cover frame also available in other RAL colours

v127215




v117915



Delivery Form for Projects - Flush-mounted/Hollow-wall KLV-...4PR

IP 30



- Delivery form for projects, separate ordering and delivery of assemblies: Wall pan + equipment set
- Approved according to IEC/EN 60670-24 and IEC/EN 62208, i.e. for distributions according to IEC/EN 61439-3
- Wall pan, empty, optionally for flush-mounting or hollow-wall mounting
- Equipment set optionally with door and frame in flat or super flat design
- Technical parameters same as compact distribution boards KLV-...

Description	Rows / MU	Type designation	Article No.	Pack (pcs.)
-------------	-----------	------------------	-------------	-------------

Delivery form for projects - Wall pan

	Wall pan, empty, for flush-mounting with plaster protection and nail straps, integrated spirit level, flange slide, for equipment set	1 / 12+2	KLV-UP1-4PR	178838	1/90
		2 / 24+4	KLV-UP2-4PR	178839	1/60
		3 / 36+6	KLV-UP3-4PR	178840	1/60
		4 / 48+8	KLV-UP4-4PR	178841	1/45

	Wall pan, empty, for hollow-wall m. with plaster protection and hollow-wall anchor, integrated spirit level, flange slide, for equipment set	1 / 12+2	KLV-HW1-4PR	178842	1/90
		2 / 24+4	KLV-HW2-4PR	178843	1/60
		3 / 36+6	KLV-HW3-4PR	178844	1/60
		4 / 48+8	KLV-HW4-4PR	178845	1/45

Delivery form for projects - Equipment set for flush-mounting

	With DIN rail structure, door with door frame, optionally flat (F) or super flat (SF), N-PE combined plug-type term., stable device cover, cable holder	1 / 12+2	KLV-F1UPP-4PR	178846	1/90
		2 / 24+4	KLV-F2UPP-4PR	178847	1/60
		3 / 36+6	KLV-F3UPP-4PR	178848	1/60
		4 / 48+8	KLV-F4UPP-4PR	178849	1/45
		1 / 12+2	KLV-SF1UPP-4PR	178850	1/90
		2 / 24+4	KLV-SF2UPP-4PR	178851	1/60
		3 / 36+6	KLV-SF3UPP-4PR	178852	1/60
		4 / 48+8	KLV-SF4UPP-4PR	178853	1/45

Delivery form for projects - Equipment set for hollow-wall mounting


	With DIN rail structure, door with door frame, optionally flat (F) or super flat (SF), N-PE combined plug-type term., stable device cover, cable holder	1 / 12+2	KLV-F1HWP-4PR	178854	1/90
		2 / 24+4	KLV-F2HWP-4PR	178855	1/60
		3 / 36+6	KLV-F3HWP-4PR	178856	1/60
		4 / 48+8	KLV-F4HWP-4PR	178857	1/45
		1 / 12+2	KLV-SF1HWP-4PR	178858	1/90
		2 / 24+4	KLV-SF2HWP-4PR	178859	1/60
		3 / 36+6	KLV-SF3HWP-4PR	178860	1/60
		4 / 48+8	KLV-SF4HWP-4PR	178861	1/45

Delivery form for projects - Equipment set for flush-mounting, N-PE screw terminals

	With DIN rail structure, door with door frame, optionally flat (F) or super flat (SF), N-PE screw terminals, stable device cover, cable holder	1 / 12+2	KLV-F1UPS-4PR	185507	1/90
		2 / 24+4	KLV-F2UPS-4PR	185508	1/60
		3 / 36+6	KLV-F3UPS-4PR	185509	1/60
		4 / 48+8	KLV-F4UPS-4PR	185510	1/45
		1 / 12+2	KLV-SF1UPS-4PR	185511	1/90
		2 / 24+4	KLV-SF2UPS-4PR	185512	1/60
		3 / 36+6	KLV-SF3UPS-4PR	185513	1/60
		4 / 48+8	KLV-SF4UPS-4PR	185514	1/45

Delivery Form for Projects - Flush-mounted/Hollow-wall mounted KLV-...4PR

IP 30



Description	Rows / MU	Type designation	Article No.	Pack (pcs.)
Delivery form for projects - Equipment set for hollow-wall mounting, N-PE screw terminals				
4500PIC-18  With DIN rail structure, door with door frame, optionally flat (F) or super flat (SF), N-PE screw terminals, stable device cover, cable holder	1 / 12+2	KLV-F1HWS-4PR	185515	1/90
	2 / 24+4	KLV-F2HWS-4PR	185516	1/60
	3 / 36+6	KLV-F3HWS-4PR	185517	1/60
	4 / 48+8	KLV-F4HWS-4PR	185518	1/45
	1 / 12+2	KLV-SF1HWS-4PR	185519	1/90
	2 / 24+4	KLV-SF2HWS-4PR	185520	1/60
	3 / 36+6	KLV-SF3HWS-4PR	185521	1/60
	4 / 48+8	KLV-SF4HWS-4PR	185522	1/45


Delivery form for projects - Equipment set for flush-mounting or hollow-wall mounting				
v127915  1x DIN rail and micro-perforated metal mounting plate, door with frame, optionally flat (F) or super flat (SF), cable and device holder, 2-fold electricity socket, connection brackets	3 / 36+6	KLV-F3M-4PR	178862	1/60
	4 / 48+8	KLV-F4M-4PR	178863	1/45
	3 / 36+6	KLV-SF3M-4PR	178864	1/60
	4 / 48+8	KLV-SF4M-4PR	178865	1/45

Delivery form for projects - Interieur, flush-mounted				
v127915  With DIN rail structure, N-PE comb. plug-type term., N-FI term. stable device cover, cable holder	1 / 12+2	KLV-1UUP-4PR	178866	1/90
	2 / 24+4	KLV-2UUP-4PR	178867	1/60
	3 / 36+6	KLV-3UUP-4PR	178868	1/60
	4 / 48+8	KLV-4UUP-4PR	178869	1/45

Delivery form for projects - Interieur, hollow-wall mounted				
v126715  With DIN rail structure, N-PE comb. plug-type term., N-FI term. stable device cover, cable holder	1 / 12+2	KLV-1HWP-4PR	178870	1/90
	2 / 24+4	KLV-2HWP-4PR	178871	1/60
	3 / 36+6	KLV-3HWP-4PR	178872	1/60
	4 / 48+8	KLV-4HWP-4PR	178873	1/45

Delivery Form for Projects - Flush-mounted/Hollow-wall mounted KLV-...4PR

IP 30



	Description	Rows / MU	Type designation	Article No.	Pack (pcs.)		
Delivery form for projects - Exterieur							
	Door with door frame, optionally flat (F) or super flat (SF), with 3D plaster compensation	1 / 12+2	KLV-F1-4PR	178874	1/90		
		2 / 24+4	KLV-F2-4PR	178875	1/60		
		3 / 36+6	KLV-F3-4PR	178876	1/60		
		4 / 48+8	KLV-F4-4PR	178877	1/45		
		1 / 12+2	KLV-SF1-4PR	178878	1/90		
		2 / 24+4	KLV-SF2-4PR	178879	1/60		
		3 / 36+6	KLV-SF3-4PR	178880	1/60		
		4 / 48+8	KLV-SF4-4PR	178881	1/45		
	Door with ventilation slots and door frame, optionally flat (F) or super flat (SF), with 3D plaster compensation	3 / 36+6	KLV-F3L-4PR	178882	1/60		
		4 / 48+8	KLV-F4L-4PR	178883	1/45		
		3 / 36+6	KLV-SF3L-4PR	178884	1/60		
		4 / 48+8	KLV-SF4L-4PR	178885	1/45		
Delivery form for projects - Exterieur, coloured							
	Door with door frame, optionally flat (F) or super flat (SF), with 3D plaster compensation, RAL* = Colour requested	1 / 12+2	KLV-F1-4PR-RAL*	178886	1/90		
		2 / 24+4	KLV-F2-4PR-RAL*	178887	1/60		
		3 / 36+6	KLV-F3-4PR-RAL*	178888	1/60		
		4 / 48+8	KLV-F4-4PR-RAL*	178889	1/45		
		1 / 12+2	KLV-SF1-4PR-RAL*	178890	1/90		
		2 / 24+4	KLV-SF2-4PR-RAL*	178891	1/60		
		3 / 36+6	KLV-SF3-4PR-RAL*	178892	1/60		
		4 / 48+8	KLV-SF4-4PR-RAL*	178893	1/45		
			Door with ventilation slots and door frame, optionally flat (F) or super flat (SF), with 3D plaster compensation, RAL* = Colour requested	3 / 36+6	KLV-F3L-4PR-RAL*	178894	1/60
				4 / 48+8	KLV-F4L-4PR-RAL*	178895	1/45
3 / 36+6	KLV-SF3L-4PR-RAL*			178896	1/60		
4 / 48+8	KLV-SF4L-4PR-RAL*			178897	1/45		

* Note: RAL colour code according to colour index, door bolt always RAL7037 dusty grey

BF-U-2S Flush-mounted/Hollow-wall Flat Distr. Boards, IP30

wa_vt01513



- Setup of the distribution board is based on a 2-step principle (wall pan / mounting insert + door)
- Installation depth of only 100 mm (especially suitable for hollow walls of reduced wall thickness)

wa_vt06313



- 2 to 6 rows 24MUs/row
- 4 to 6 rows 33MUs/row
- Degree of protection IP30
- Protection class I
- Complete types incl. neutral and protective conductor terminals
- Wall pan (galvanized) prepared for cable insertion at the top/bottom
- Mounting insert incl. door and cover frame, sheet steel phosphatized and polyester-powder-coated in RAL 9016 (white)

vt11816



- Metal front plates with contact point at the enclosure
- Sheet steel door with or without inspection window
- 150 mm DIN rail distance (ideal for switchgear positioned on rail systems)
- Prepared enclosures come with mounting plate and can be used as media distribution boards
- Screw-type and combined plug-type terminals can be integrated by means of terminal carriers

BF-U(T)-2S Flush-mounted/Hollow-wall Flat Distr. Boards, IP30, Installation Depth 100 mm

Scope of delivery:

- Wall pan (welded construction)
- Mounting insert incl. door and cover frame
- DIN carrier rails
- Front panels
- Protective and neutral conductor terminals



Flush-mounted/hollow-wall flat distribution board BF-U-2S-./...-100 without inspection window, complete

MU per row / rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 2	BF-U-2S-2/48-100	182464	1
24 / 3	BF-U-2S-3/72-100	182465	1
24 / 4	BF-U-2S-4/96-100	182466	1
24 / 5	BF-U-2S-5/120-100	182467	1
24 / 6	BF-U-2S-6/144-100	182468	1
33 / 4	BF-U-2S-4/132-100	182469	1
33 / 5	BF-U-2S-5/165-100	182470	1
33 / 6	BF-U-2S-6/198-100	182471	1

wa_vt01513



Flush-mounted/hollow-wall flat distribution board BF-UT-2S-./...-100 with inspection window, complete

MU per row / rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 2	BF-UT-2S-2/48-100	182472	1
24 / 3	BF-UT-2S-3/72-100	182473	1
24 / 4	BF-UT-2S-4/96-100	182474	1
24 / 5	BF-UT-2S-5/120-100	182475	1
24 / 6	BF-UT-2S-6/144-100	182476	1
33 / 4	BF-UT-2S-4/132-100	182477	1
33 / 5	BF-UT-2S-5/165-100	182478	1
33 / 6	BF-UT-2S-6/198-100	182479	1

wa_vt06313



BF-UTM-2S Flush-mounted/hollow-wall media distribution board, IP30, installation depth 100 mm

Scope of delivery:

- Wall pan (welded construction)
- Mouning insert incl. door and cover frame
- Micro-perforated mounting plate
- DIN carrier rail



Flush-mounted/hollow-wall media distribution board BF-UTM-2S-./...-100 with inspection window, complete

Version	Type designation	Article No.	Pack (pcs.)
White			
2 rows with MPL	BF-UTM-2S-2/48-100	182480	1
3 rows with MPL	BF-UTM-2S-3/72-100	182481	1
4 rows with MPL	BF-UTM-2S-4/96-100	182482	1
5 rows with MPL	BF-UTM-2S-5/120-100	182483	1

vt11816



BF-U(T)-2S Flush-mounted/Hollow-wall Flat Distribution Boards, IP30, Installation Depth 100 mm

Technical data BF-U(T)-2S-./...-100


	Unit	
Electrical		
Versions according to	IEC/EN 61439-1/3; IEC/EN 62208	
Degree of protection	IP30	
Protection class	I	
Impact resistance	IK07 (version with sheet steel door and inspection window) IK08 (version with sheet steel door, no inspection window)	
Rated voltage	V	240/415 AC @ 50/60 Hz
Rated insulation voltage	V	415 AC
Rated current range	A	max. 125
Max. power loss of all devices installed in the distribution board at 35°K difference in temperature (ΔT *):		
BF-U(T)-2S-2/48-100	W	54
BF-U(T)-2S-3/72-100	W	66
BF-U(T)-2S-4/96-100	W	78
BF-U(T)-2S-5/120-100	W	90
BF-U(T)-2S-6/144-100	W	102
BF-U(T)-2S-4/132-100	W	101
BF-U(T)-2S-5/165-100	W	115
BF-U(T)-2S-6/198-100	W	130
*) the ambient temperature was defined as 35°C		
Mechanical		
Wall pan	Sheet steel, galvanized	
Mounting insert with cover frame	Sheet steel, phosphatized and powder-coated, RAL 9016	
Door with/without inspection window	Sheet steel, phosphatized and powder-coated, RAL 9016	
Inspection window	PVC, transparent	
Device carrier rail	Sheet steel, galvanized	
Distance between carrier rails	mm	150
Mounting plate (for the media distribution board only)	Sheet steel, galvanized	
Installation type	Indoor	
N/PE terminal equipment (max. 63 A)	N	PE
BF-U(T)-2S-2/48-100	1x KL29 + 1x KL7	1x KL45
BF-U(T)-2S-3/72-100	1x KL29 + 2x KL7	1x KL45
BF-U(T)-2S-4/96-100	1x KL29 + 3x KL7	1x KL45
BF-U(T)-2S-5/120-100	1x KL29 + 4x KL7	1x KL45
BF-U(T)-2S-6/144-100	1x KL29 + 5x KL7	1x KL45
BF-U(T)-2S-4/132-100	1x KL45 + 3x KL7	1x KL60
BF-U(T)-2S-5/165-100	1x KL45 + 4x KL7	1x KL60
BF-U(T)-2S-6/198-100	1x KL45 + 5x KL7	1x KL60
Definition of terminal points according to type:		
KL7	1x 25mm ² / 6x 16mm ²	
KL29	2x 25mm ² / 27x 16mm ²	
KL45	2x 25mm ² / 43x 16mm ²	
KL60	2x 25mm ² / 58x 16mm ²	

BF-U(T)-2S Flush-mounted/Hollow-wall Flat Distribution Boards, IP30, Installation Depth 100 mm

Functional product features

- **Wall pan** with easy-to-knock-out openings for cable insertion at the top and bottom
In addition, there are slots at the back of the wall pan to ensure fixing/strain relief of the cables right after inserting them. Lateral add-on can be achieved by means of integrated straps which serve as fasteners in the brickwork. These straps allow you to install two distribution boards side by side at an appropriate distance so as to avoid a collision of the two door frames when fixing the inserts. For inserts in hollow-walls a suitable BFZ-HWS fastening set is available as accessory.
- **Mounting insert** incl. door and cover frame is delivered with the correct number of carrier rails (35x7.5mm). They come firmly riveted to the insert when they are delivered.
As a standard feature, the media distribution board is equipped with a micro-perforated mounting plate for universal installation purposes of components. In addition, a carrier rail in the top area provides space for the DIN rail devices. Carefully selected positioning of the long holes for screw-fixing the wall pan provides 3D plaster compensation in a straightforward way. (alignment left/right and in depth).
Screw-type terminals are pre-assembled directly at the mounting insert (no loss of MUs).
In addition and where necessary, you can install additional terminals (screw-type or combined plug-type terminals) on the side as well as at the top and bottom by means of BFZ-KTH-KSK or BFZ-KTH-SK holders.
- **Sheet steel door** with a rotary bolt lock in the versions with or without inspection window. The media distribution board comes with a door incl. an inspection window and additional ventilation slots (at the top and bottom) for passive ventilation.
- **Front panels** come with our proven locks as a standard feature, these locks automatically make contact with the enclosure by closing and tightening the screw (ground connection).

Overview of the individual components





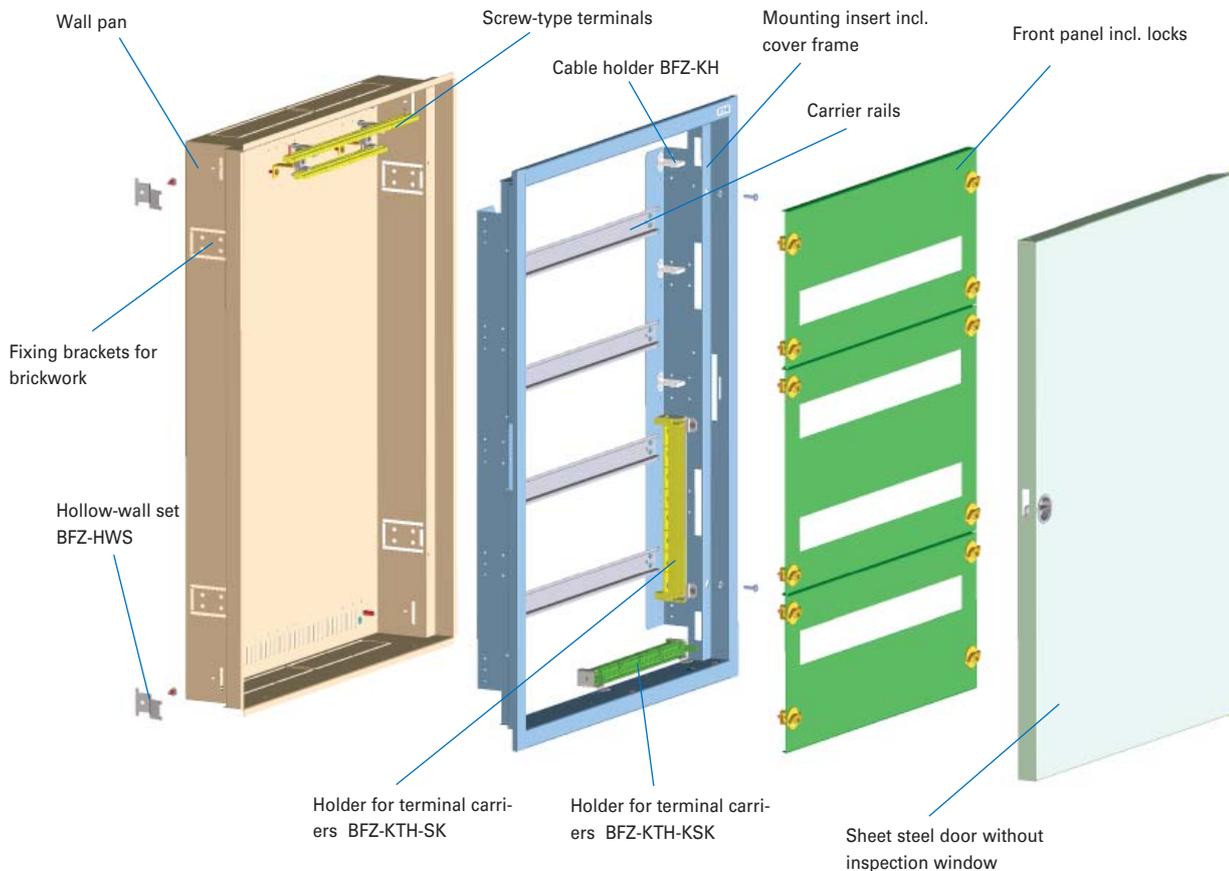


Flat_3D

BF-U(T)-2S Flush-mounted/Hollow-wall Flat Distribution Boards, IP30, Installation Depth 100 mm


Dimensions (mm)

Flush-mounted/Hollow-wall flat distribution board with 24MUs per row

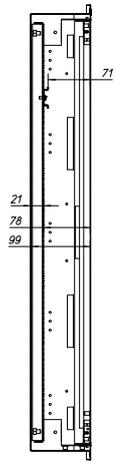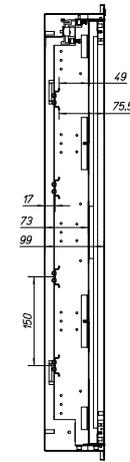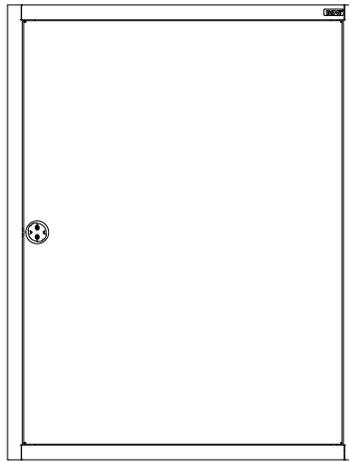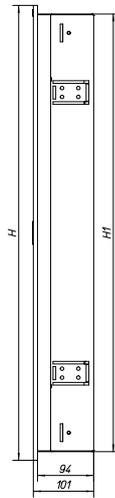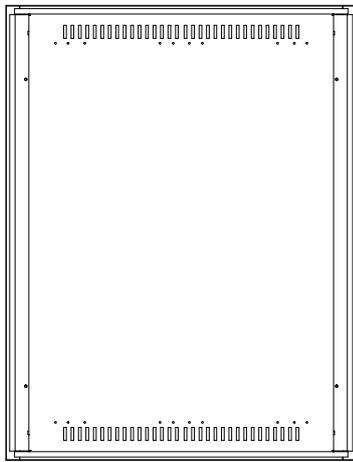





Standard setup with carrier rail

Media distribution board with mounting plate

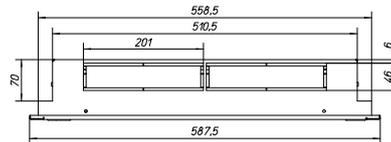


Type	H	H1
BF-U(TM)-2S-2/48-100	468	439
BF-U(TM)-2S-3/72-100	618	589
BF-U(TM)-2S-4/96-100	768	739
BF-U(TM)-2S-5/120-100	918	889
BF-U(T)-2S-6/144-100	1068	1039

Flush-mounted/Hollow-wall flat distribution board with 33MUs per row

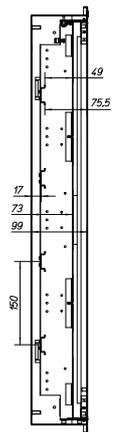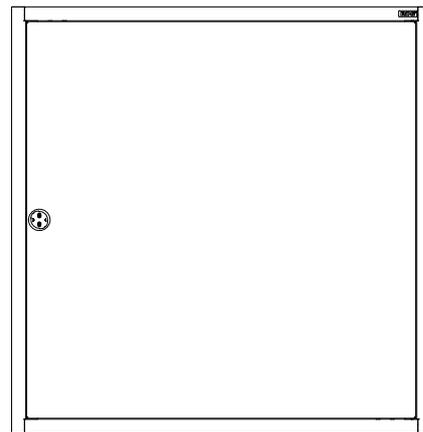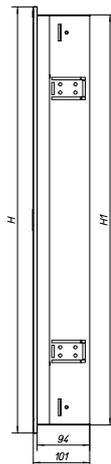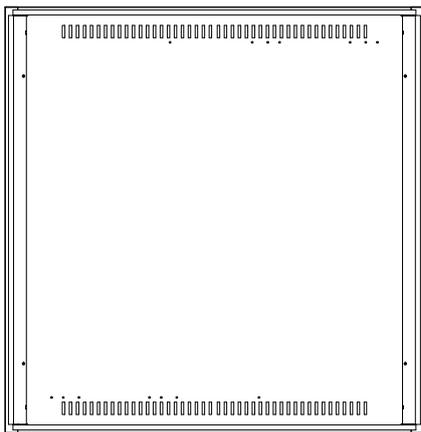

Standard setup with carrier rail

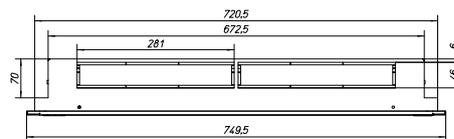

Type	H	H1
BF-U(T)-2S-4/132-100	768	739
BF-U(T)-2S-5/165-100	918	889
BF-U(T)-2S-6/198-100	1068	1039

BF-U Flush-mounted Flat Distribution Boards, IP30

wa_vt01113



- Flush-mounted Flat Distribution Boards
- 2 to 6 rows 24MU/row (Versions A, E, C)
- 4 to 6 rows 33MU/row (Versions A, C, P)
- IP30
- Protection class I

wa_vt01213



- Sheet steel enclosure polyesterpowder coated (white RAL 9016; Version C also in grey RAL 7035)
- Prepared for Eaton MCCB Incoms
- Sheet steel front plates with contacting to the enclosure
- Removable DIN-rail frame
- Generous wiring space
- 150 mm DIN-rail distance (ideal for switchgear busbar system)

wa_vt06313



- Complete enclosure (including N/PE-terminals)
- Depth: 127 mm
- Universal mounting plate

BF-U Flush-mounted Flat Distribution Boards, IP30, Version A

Flush-mounted Flat Distribution Boards BF-U-./..-A, complete

Scope of Delivery:

- Wall Box with door frame
- Door with Rotary Door handle
- DIN-rail frame
- Front plates
- Neutral and protective earth terminals



MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 2	BF-U-2/48-A	240737	1
24 / 3	BF-U-3/72-A	240738	1
24 / 4	BF-U-4/96-A	240739	1
24 / 5	BF-U-5/120-A	240740	1
24 / 6	BF-U-6/144-A	240741	1
33 / 4	BF-U-4/132-A	240745	1
33 / 5	BF-U-5/165-A	240746	1
33 / 6	BF-U-6/198-A	240747	1

wa_v01513



BF-U Flush-mounted Flat Distribution Boards, IP30, Version A

Technical Data BF-U-/-A

- Flat installation distribution board for flush-mounting
- 2- to 6-rows with 24 MU per row
- 4- to 6-rows with 33 MU per row

Enclosure:

- Closed Construction including rear wall
- Rear wall useable as mounting area
- 2 cable entry flanges at flat distribution board with 24MU width at the top
- 3 cable entry flanges at flat distribution board with 33MU width at the top
- Pre stamped cable entry openings at the bottom
- Terminals pre mounted at the enclosure (no losing of Module Units)

Wall Box:

- Wall Box with door frame
- Rear wall useable as mounting area
- Easy removeable knock-outs
- 127 mm depth
- Terminals pre mounted at the enclosure (no losing of Module Units)
- 4 lateral mounting straps

Door:

- Steel sheet door with rotary door handle white in the scope of delivery
- Steel sheet door with additional depth (required to install RMO-Components at the door) is available as accessory (**BFZ-OTR-/-...**)
- Steel sheet door with window is available as accessory (**BFZ-OTT-/-...**)

DIN-Rail Frame:

- Removable DIN-rail frame
- For 45 mm Switchgear
- 150 mm distance between DIN-Rails
- Eaton MCCB integrate able by mounting set (**BFZ-NZM1-SET(33)**)
- Universal mounting set for flush mounted enclosure (**BFZ-U-MPL...**)

Front plate:

- Contacting of the metal front plate by special catch on enclosure

Electrical

Design according to	EN 61439-1,-3 EN 62208
Protection class	IP30 according to EN 60529
Protection class	I
Rated voltage	AC 240/415V; 50/60 Hz
Rated isolation voltage	AC 415V
Rated current range	max. 125/160 A (according to Incoming switch)
Max. power loss for all devices integrated in the flat distribution board at an ambient temperature of 35°C:	
BF-U-2/48	67 W
BF-U-3/72	81 W
BF-U-4/96	94 W
BF-U-4/132	118 W
BF-U-5/120	108 W
BF-U-5/165	134 W
BF-U-6/144	122 W
BF-U-6/198	142 W

Mechanical

Enclosure	Steel sheet Polyester powder coated
Door	Steel sheet Polyester powder coated
Front plates	Steel sheet Polyester powder coated
DIN-rail frame	Steel sheet galvanised
Terminal support	PPO
Colour	white RAL 9016
Distance between DIN-Rails	150 mm
N/PE terminals max. 63 A	
	N PE
BF-U-2/48	2x25mm ² +9x16mm ² 2x25mm ² +27x16mm ²
BF-U-3/72	2x25mm ² +9x16mm ² 2x25mm ² +27x16mm ²
BF-U-4/96	2x25mm ² +9x16mm ² 2x25mm ² +43x16mm ²
BF-U-4/132	2x25mm ² +9x16mm ² 2x25mm ² +58x16mm ²
BF-U-5/120	2x25mm ² +9x16mm ² 2x25mm ² +58x16mm ²
BF-U-5/165	2x25mm ² +9x16mm ² 2x25mm ² +74x16mm ²
BF-U-6/144	2x25mm ² +9x16mm ² 2x25mm ² +58x16mm ²
BF-U-6/198	2x25mm ² +9x16mm ² 2x25mm ² +74x16mm ²

Cable entries above

	24MU per row	33MU per row
Relief stamp:	4x (88x46mm)	5x (88x46mm)


Cable entries below

	24MU per row	33MU per row
Relief stamp:	4x (88x46mm)	5x (88x46mm)

BF-U Flush-mounted Flat Distribution Boards, IP30, Version A


Dimensions (mm)

Flush-mounting Flat Distribution Boards with 24MU per row

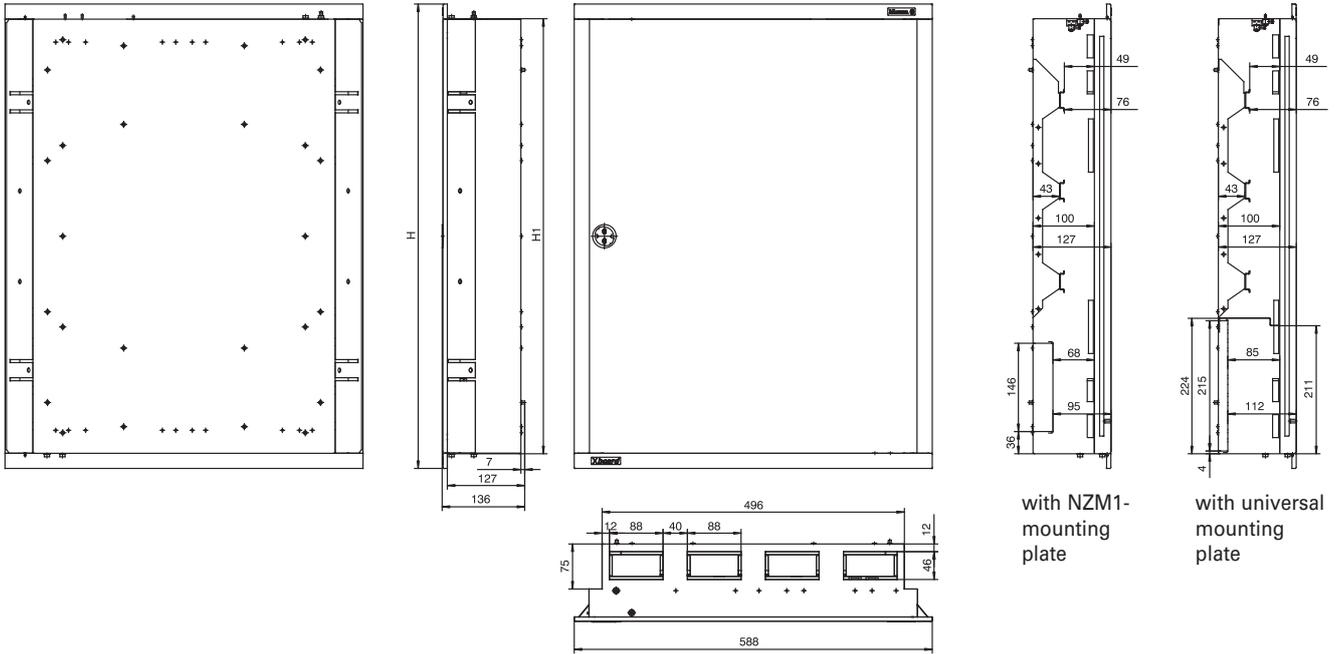

Type	H	H1
BF-U-2/48-A	470	420
BF-U-3/72-A	620	570
BF-U-4/96-A	770	720
BF-U-5/120-A	920	870
BF-U-6/144-A	1070	1020

Flush-mounting Flat Distribution Boards with 33MU per row

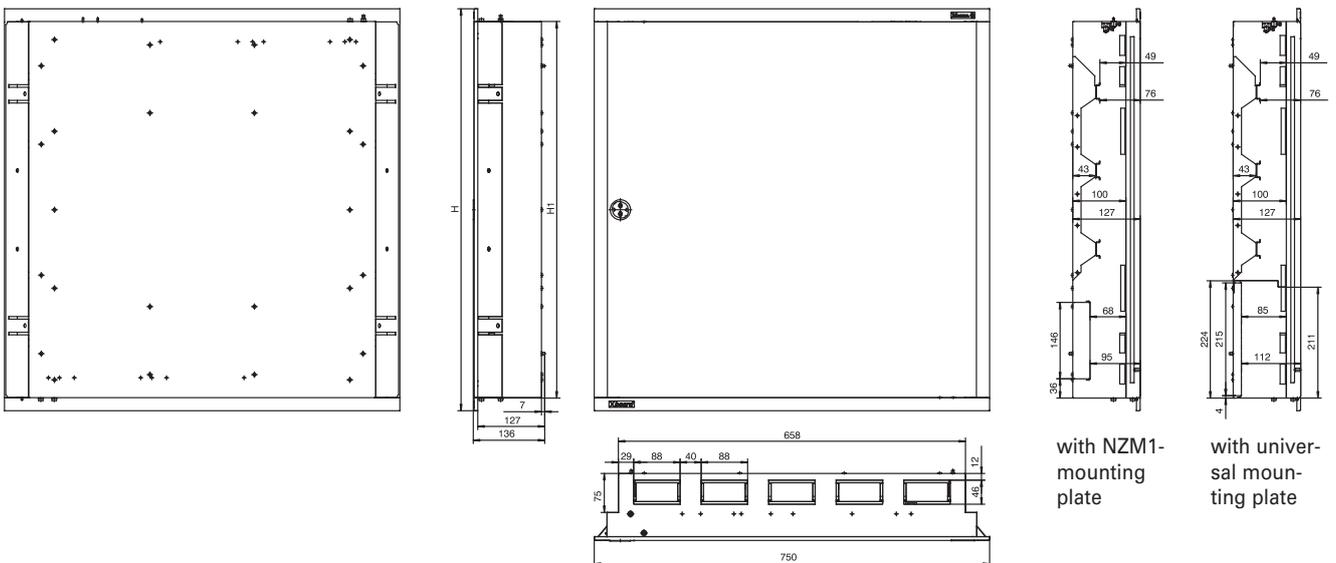

Type	H	H1
BF-U-4/132-A	770	720
BF-U-5/165-A	920	870
BF-U-6/198-A	1070	1020

BF-U Flush-mounted Flat Distribution Boards, IP30, Version E

Flush-mounted Flat Distribution Boards BF-U-./..-E, complete



Scope of Delivery:

- Wall Box with door frame
- Door with Rotary Door handle Profi-Line
- DIN-rail frame
- Front plates
- Neutral and protective earth terminals

MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 2	BF-U-2/48-E	283052	1
24 / 3	BF-U-3/72-E	283053	1
24 / 4	BF-U-4/96-E	283054	1
24 / 5	BF-U-5/120-E	283055	1
24 / 6	BF-U-6/144-E	285221	1

wa_vt01413



BF-U Flush-mounted Flat Distribution Boards, IP30, Version E

Technical Data BF-U-./.-E

- Flat installation distribution board for flush-mounting
- 2- to 6-rows with 24 MU per row

Enclosure:

- Closed Construction including rear wall
- Rear wall useable as mounting area
- 2 cable entry flanges at flat distribution board with 24MU width at the top
- Pre stamped cable entry openings at the bottom
- Terminals pre mounted at the enclosure (no losing of Module Units)

Wall Box:

- Wall Box with door frame
- Rear wall useable as mounting area
- Easy removeable knock-outs
- 127 mm depth
- Terminals pre mounted at the enclosure (no losing of Module Units)
- 4 lateral mounting straps

Door:

- Steel sheet door with rotary door handle white in the scope of delivery
- Steel sheet door with additional depth (required to install RMO-Components at the door) is available as accessory (**BFZ-OTR-./...**)
- Steel sheet door with window is available as accessory (**BFZ-OTT-OR./...**)

DIN-Rail Frame:

- Removable DIN-rail frame
- For 45 mm Switchgear
- 150 mm distance between DIN-Rails
- Eaton MCCB integrate able by mounting set (**BFZ-NZM1-SET(33)**)
- Universal mounting set for flush mounted enclosure (**BFZ-U-MPL...**)

Front plate:

- Contacting of the metal front plate by special catch on enclosure

Electrical	
Design according to	EN 61439-1,-3 EN 62208
Protection class	IP30 according to EN 60529
Protection class	I
Rated voltage	AC 240/415V; 50/60 Hz
Rated isolation voltage	AC 415V
Rated current range	max. 125/160 A (according to Incoming switch)
Max. power loss for all devices integrated in the flat distribution board at an ambient temperature of 35°C:	
BF-U-2/48	67 W
BF-U-3/72	81 W
BF-U-4/96	94 W
BF-U-5/120	108 W
BF-U-6/144	122 W

Mechanical		
Enclosure	Steel sheet	Polyester powder coated
Door	Steel sheet	Polyester powder coated
Front plates	Steel sheet	Polyester powder coated
DIN-rail frame	Steel sheet galvanised	
Terminal support	PPO	
Colour	white RAL 9016	
Distance between DIN-Rails	150 mm	
N/PE terminals max. 63 A	N	PE
BF-U-2/48	2x25mm ² +13x16mm ²	2x25mm ² +13x16mm ²
BF-U-3/72	2x25mm ² +13x16mm ²	2x25mm ² +13x16mm ²
BF-U-4/96	2x25mm ² +27x16mm ²	2x25mm ² +27x16mm ²
BF-U-5/120	2x25mm ² +27x16mm ²	2x25mm ² +27x16mm ²
BF-U-6/144	2x25mm ² +27x16mm ²	2x25mm ² +27x16mm ²

Cable entries above

24MU per row
Relief stamp: 4x (88x46mm)


Cable entries below

24MU per row
Relief stamp: 4x (88x46mm)

BF-U Flush-mounted Flat Distribution Boards, IP30, Version E

Dimensions (mm)

Flush-mounting Flat Distribution Boards with 24MU per row

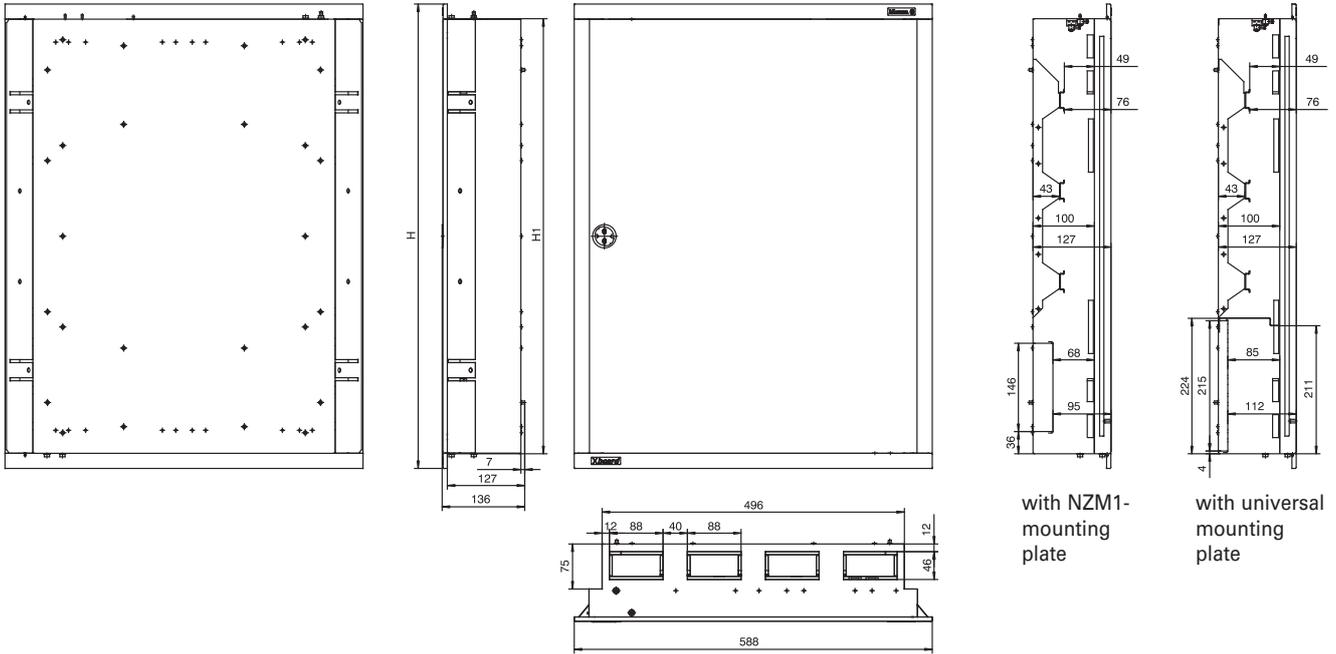

Type	H	H1
BF-U-2/48-E	470	420
BF-U-3/72-E	620	570
BF-U-4/96-E	770	720
BF-U-5/120-E	920	870
BF-U-6/144-E	1070	1020

BF-U Flush-mounted Flat Distribution Boards, IP30, Version C

Scope of Delivery:

- Wall Box with door frame (white oder grey)
- Door with Rotary Door handle (white and grey with or without window)
- DIN-rail frame
- Front plates (white oder grey)
- Neutral and protective earth terminals



Flush-mounted Flat Distribution Boards BF-U-./...(-G)-C without window, complete

MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 2	BF-U-2/48-C	113689	1
24 / 3	BF-U-3/72-C	283048	1
24 / 4	BF-U-4/96-C	283049	1
24 / 5	BF-U-5/120-C	283050	1
24 / 6	BF-U-6/144-C	283051	1
33 / 4	BF-U-4/132-C	103097	1
33 / 5	BF-U-5/165-C	103098	1
33 / 6	BF-U-6/198-C	103099	1



Grey			
24 / 2	BF-U-2/48-G-C	113690	1
24 / 3	BF-U-3/72-G-C	283056	1
24 / 4	BF-U-4/96-G-C	283057	1
24 / 5	BF-U-5/120-G-C	283058	1
24 / 6	BF-U-6/144-G-C	283059	1
33 / 4	BF-U-4/132-G-C	103100	1
33 / 5	BF-U-5/165-G-C	103101	1
33 / 6	BF-U-6/198-G-C	103102	1

Flush-mounted Flat Distribution Boards BF-UT-./...(-G)-C with window, complete

MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 2	BF-UT-2/48-C	113691	1
24 / 3	BF-UT-3/72-C	103117	1
24 / 4	BF-UT-4/96-C	103118	1
24 / 5	BF-UT-5/120-C	103119	1
24 / 6	BF-UT-6/144-C	103120	1
33 / 4	BF-UT-4/132-C	103121	1
33 / 5	BF-UT-5/165-C	103122	1
33 / 6	BF-UT-6/198-C	103123	1



Grey			
24 / 2	BF-UT-2/48-G-C	113692	1
24 / 3	BF-UT-3/72-G-C	103124	1
24 / 4	BF-UT-4/96-G-C	103125	1
24 / 5	BF-UT-5/120-G-C	103126	1
24 / 6	BF-UT-6/144-G-C	103127	1
33 / 4	BF-UT-4/132-G-C	103128	1
33 / 5	BF-UT-5/165-G-C	103129	1
33 / 6	BF-UT-6/198-G-C	103130	1

BF-U Flush-mounted Flat Distribution Boards, IP30, Version C

Technical Data BF-U-./...-C

- Flat installation distribution board for flush-mounting
- 2- to 6-rows with 24 MU per row
- 4- to 6-rows with 33 MU per row

Enclosure:

- Closed Construction including rear wall
- Rear wall useable as mounting area
- 2 cable entry flanges at flat distribution board with 24MU width at the top
- Pre stamped cable entry openings at the bottom
- Terminals pre mounted at the enclosure (no losing of Module Units)

Wall Box:

- Wall Box with door frame
- Rear wall useable as mounting area
- Easy removeable knock-outs
- 127 mm depth
- Terminals pre mounted at the enclosure (no losing of Module Units)
- 4 lateral mounting straps

Door:

- Steel sheet door with rotary door handle white and gray in the scope of delivery
- Steel sheet door with window white and grey in the scope of delivery
- Steel sheet door with additional depth (required to install RMQ-Components at the door) is available as accessory (**BFZ-OTR-J...**)

DIN-Rail Frame:

- Removable DIN-rail frame
- For 45 mm Switchgear
- 150 mm distance between DIN-Rails
- Eaton MCCB integrate able by mounting set (**BFZ-NZM1-SET(33)**)
- Universal mounting set for flush mounted enclosure (**BFZ-U-MPL...**)

Front plate:

- Contacting of the metal front plate by special catch on enclosure

Electrical

Design according to	EN 61439-1,-3 EN 62208
Protection class	IP30 according to EN 60529
Protection class	I
Rated voltage	AC 240/415V; 50/60 Hz
Rated isolation voltage	AC 415V
Rated current range	max. 125/160 A (according to Incoming switch)
Max. power loss for all devices integrated in the flat distribution board at an ambient temperature of 35°C:	
BF-U(T)-2/48	67 W
BF-U(T)-3/72	81 W
BF-U(T)-4/96	94 W
BF-U(T)-4/132	118 W
BF-U(T)-5/120	108 W
BF-U(T)-5/165	134 W
BF-U(T)-6/144	122 W
BF-U(T)-6/198	142 W

Mechanical

Enclosure	Steel sheet Polyester powder coated
Door	Steel sheet Polyester powder coated
Front plates	Steel sheet Polyester powder coated
DIN-rail frame	Steel sheet galvanised
Terminal support	PPO
Colour	white RAL 9016 grey RAL 7035
Distance between DIN-Rails	150 mm
N/PE terminals max. 63 A	
	N PE
BF-U-2/48	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-U-3/72	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-U-4/96	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-U-4/132	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²
BF-U-5/120	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-U-5/165	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²
BF-U-6/144	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-U-6/198	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²

Cable entries above

24MU per row	33MU per row
Relief stamp: 4x (88x46mm)	Relief stamp: 5x (88x46mm)


Cable entries below

24MU per row	33MU per row
Relief stamp: 4x (88x46mm)	Relief stamp: 5x (88x46mm)

BF-U Flush-mounted Flat Distribution Boards, IP30, Version C


Dimensions (mm)

Flush-mounting Flat Distribution Boards with 24MU per row

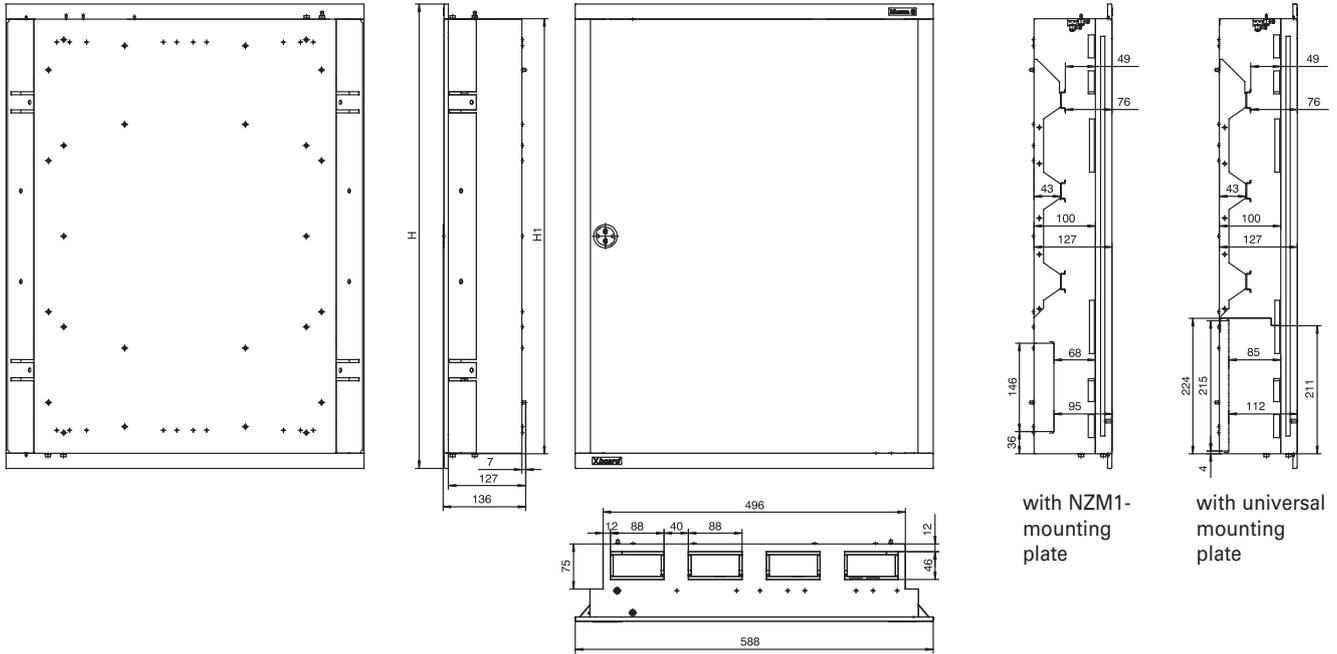

Type	H	H1
BF-U-2/48(-G)-C	470	420
BF-U-3/72(-G)-C	620	570
BF-U-4/96(-G)-C	770	720
BF-U-5/120(-G)-C	920	870
BF-U-6/144(-G)-C	1070	1020

Flush-mounting Flat Distribution Boards with 33MU per row

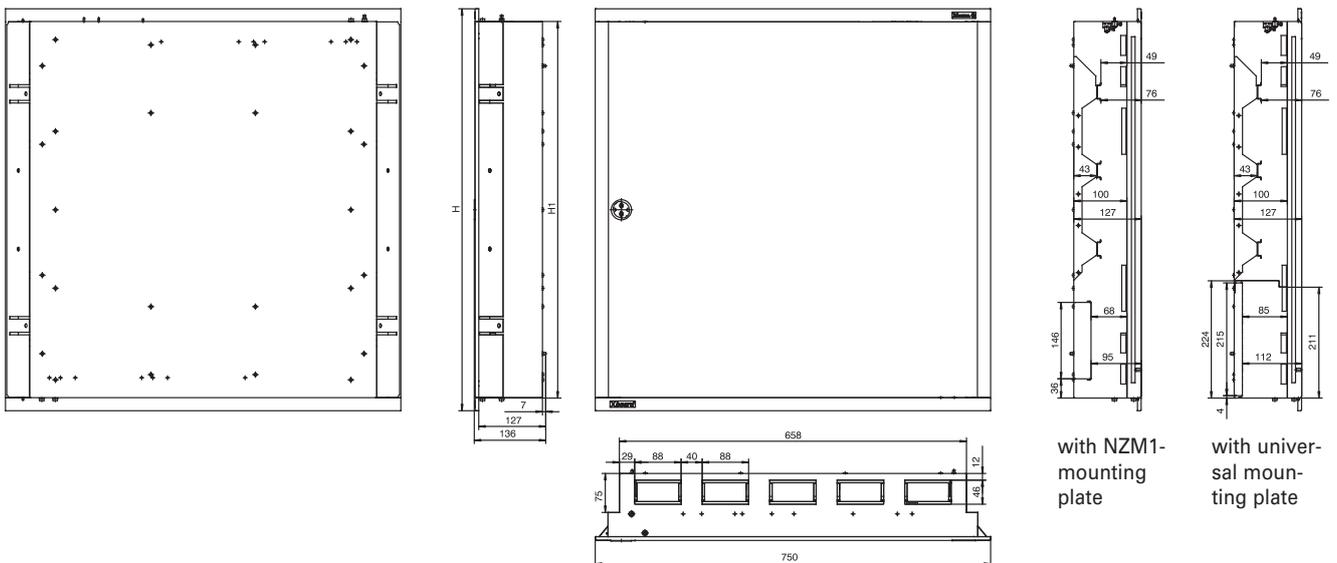

Type	H	H1
BF-U-4/132(-G)-C	770	720
BF-U-5/165(-G)-C	920	870
BF-U-6/198(-G)-C	1070	1020

BF-U Flush-mounted Flat Distribution Boards, IP30, Version P

Scope of Delivery:

- Wall Box with door frame
- Door with Rotary Door handle (with or without window)
- DIN-rail frame
- Front plates
- Neutral and protective earth terminals



Flush-mounted Flat Distribution Boards BF-U-./...(-G)-P without window, complete

MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 3	BF-U-3/72-P	285349	1
24 / 4	BF-U-4/96-P	285350	1
24 / 5	BF-U-5/120-P	285351	1
24 / 6	BF-U-6/144-P	285352	1



Flush-mounted Flat Distribution Boards BF-UT-./...(-G)-P with window, complete

MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 3	BF-UT-3/72-P	289133	1
24 / 4	BF-UT-4/96-P	289134	1
24 / 5	BF-UT-5/120-P	289135	1
24 / 6	BF-UT-6/144-P	289136	1



BF-U Flush-mounted Flat Distribution Boards, IP30, Version P

Technical Data BF-U-./...-P

- Flat installation distribution board for flush-mounting
- 3- to 6-rows with 24 MU per row

Enclosure:

- Closed Construction including rear wall
- Rear wall useable as mounting area
- 2 cable entry flanges at flat distribution board with 24MU width at the top
- Pre stamped cable entry openings at the bottom
- Terminals pre mounted at the enclosure (no losing of Module Units)

Wall Box:

- Wall Box with door frame
- Rear wall useable as mounting area
- Easy removeable knock-outs
- 127 mm depth
- Terminals pre mounted at the enclosure (no losing of Module Units)
- 4 lateral mounting straps

Door:

- Steel sheet door with rotary door handle white or steel sheet door with window and rotary door handle white in the scope of delivery
- Steel sheet door with additional depth (required to install RMQ-Components at the door) is available as accessory (BFZ-OTR-./...)

DIN-Rail Frame:

- Removable DIN-rail frame
- For 45 mm Switchgear
- 150 mm distance between DIN-Rails
- Eaton MCCB integrate able by mounting set (BFZ-NZM1-SET/(33))
- Universal mounting set for flush mounted enclosure (BFZ-U-MPL...)

Front plate:

- Contacting of the metal front plate by special catch on enclosure

Electrical

Design according to	EN 61439-1,-3 EN 62208
Protection class	IP30 according to EN 60529
Protection class	I
Rated voltage	AC 240/415V; 50/60 Hz
Rated isolation voltage	AC 415V
Rated current range	max. 125/160 A (according to Incoming switch)
Max. power loss for all devices integrated in the flat distribution board at an ambient temperature of 35°C:	
BF-U-3/72	81 W
BF-U-4/96	94 W
BF-U-5/120	108 W
BF-U-6/144	122 W

Mechanical

Enclosure	Steel sheet Polyester powder coated
Door	Steel sheet Polyester powder coated
Front plates	Steel sheet Polyester powder coated
DIN-rail frame	Steel sheet galvanised
Terminal support	PPO
Colour	white RAL 9016
Distance between DIN-Rails	150 mm
N/PE terminals max. 63 A	
	N PE
BF-U-3/72	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-U-4/96	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²
BF-U-5/120	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²
BF-U-6/144	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²

Cable entries above

24MU per row

Relief stamp: 4x (88x46mm)

Cable entries below


24MU per row

Relief stamp: 4x (88x46mm)

BF-U Flush-mounted Flat Distribution Boards, IP30, Version P

Dimensions (mm)

Flush-mounting Flat Distribution Boards with 24MU per row

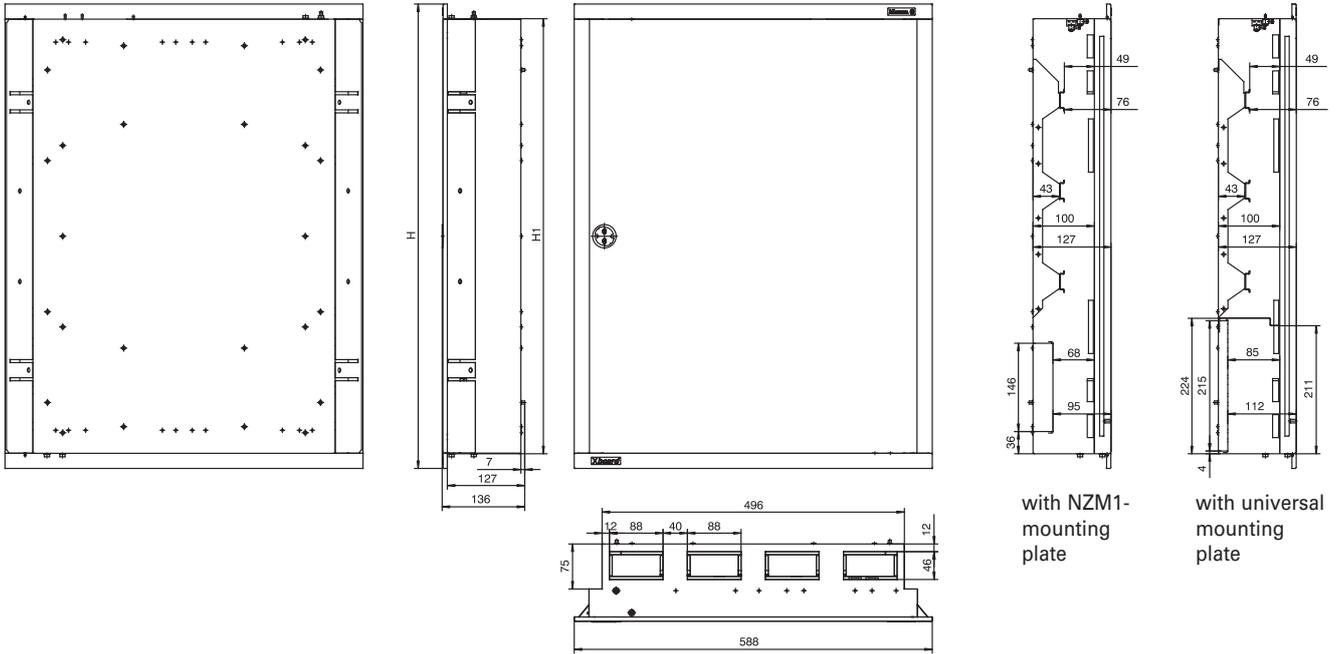


Type	H	H1
BF-U(T)-3/72-P	620	570
BF-U(T)-4/96-P	770	720
BF-U(T)-5/120-P	920	870
BF-U(T)-6/144-P	1070	1020

BF-U Flush-mounted Flat Distribution Boards, IP30


Allocation of front plate

Allocation of front plate (Delivery status), Version A

24MU per row

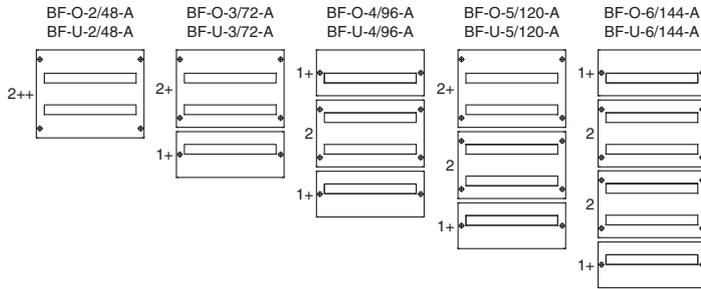


33MU per row

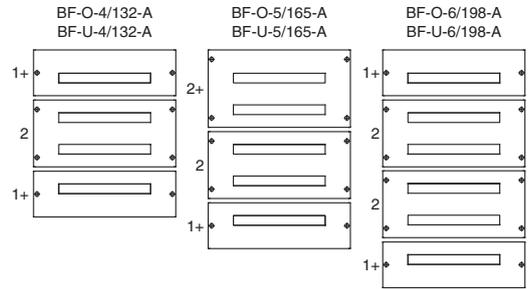


Allocation of front plate (Delivery status), Version E

24MU per row

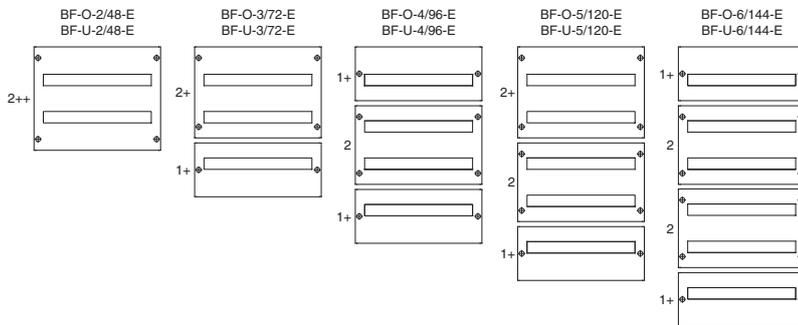


Allocation of front plate (Delivery status), Version C

24MU per row

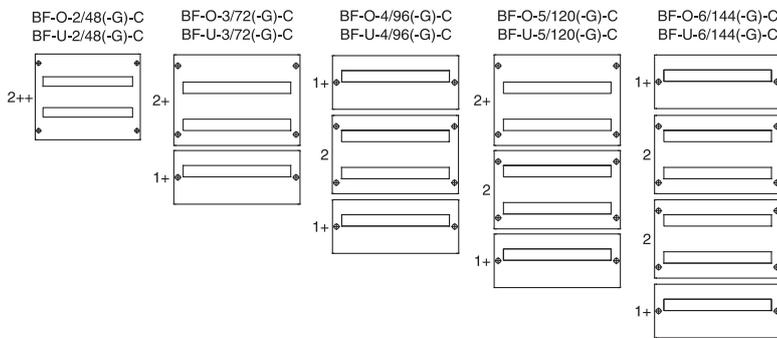


33MU per row

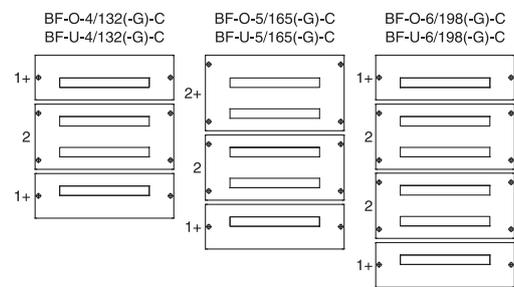

Allocation of front plate (Delivery status), Version P

24MU per row

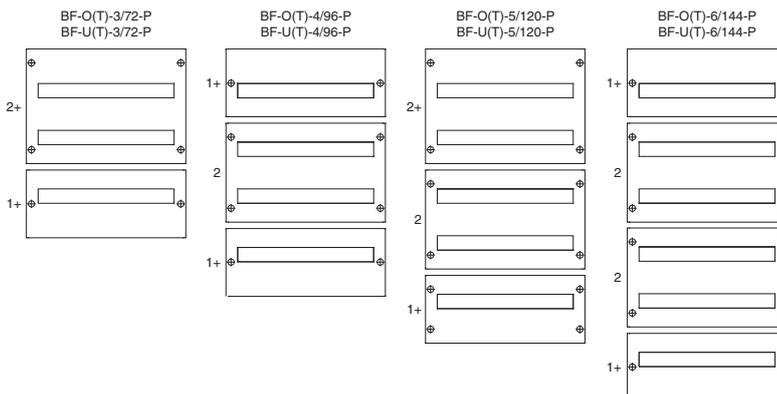

BF-O Surface-mounted Flat Distribution Boards, IP30

wa_vt00913



- Surface-mounted Flat Distribution Board
- 2- to 6-rows 24MU/row (Versions A, E, C)
- 4- to 6-rows 33MU/row (Versions A, C, P)
- IP30
- Protection class I


wa_vt06213



- Sheet steel enclosure polyesterpowder coated (white RAL 9016; Version C also in grey RAL 7035)
- Prepared for Eaton MCCB Incoms
- Sheet steel front plates with contacting to the enclosure
- Removable DIN-rail frame
- Generous wiring space
- 150 mm DIN-rail distance (ideal for switchgear busbar system)
- Complete enclosure (including N/PE-terminals)
- Depth: 140 mm
- Universal mounting plate

BF-O Surface-mounted Flat Distribution Boards, IP30, Version A

Surface-mounted Flat Distribution Boards BF-O-./..-A, complete



Scope of Delivery:

- Enclosure
- Door with Rotary Door handle
- DIN-rail frame
- Cable Entry Flange (above)
- Front plates
- Neutral and protective earth terminals

MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 2	BF-O-2/48-A	240732	1
24 / 3	BF-O-3/72-A	240733	1
24 / 4	BF-O-4/96-A	240734	1
24 / 5	BF-O-5/120-A	240735	1
24 / 6	BF-O-6/144-A	240736	1
33 / 4	BF-O-4/132-A	240742	1
33 / 5	BF-O-5/165-A	240743	1
33 / 6	BF-O-6/198-A	240744	1



wa_vt01813

BF-O Surface-mounted Flat Distribution Boards, IP30, Version A

Technical Data BF-O-/-A

- Flat installation distribution board for surface-mounting
- 2- to 6-rows with 24 MU per row
- 4- to 6-rows with 33 MU per row

Enclosure:

- Closed Construction including rear wall
- Rear wall useable as mounting area
- 2 cable entry flanges at flat distribution board with 24MU width at the top
- 3 cable entry flanges at flat distribution board with 33MU width at the top
- Pre stamped cable entry openings at the bottom
- Terminals pre mounted at the enclosure (no losing of Module Units)

Wall Box:

- Wall Box with door frame
- Rear wall useable as mounting area
- Easy removeable knock-outs
- 127 mm depth
- Terminals pre mounted at the enclosure (no losing of Module Units)
- 4 lateral mounting straps

Door:

- Steel sheet door with rotary door handle white in the scope of delivery
- Steel sheet door with additional depth (required to install RMO-Components at the door) is available as accessory (**BFZ-OTR-/-...**)
- Steel sheet door with window is available as accessory (**BFZ-OTT-/-...**)

DIN-Rail Frame:

- Removable DIN-rail frame
- For 45 mm Switchgear
- 150 mm distance between DIN-Rails
- Eaton MCCB integrate able by mounting set (**BFZ-NZM1-SET(33)**)
- Universal mounting set for surface mounted enclosure (**BFZ-O-ITMPL..**)

Front plate:

- Contacting of the metal front plate by special catch on enclosure

Electrical

Design according to	EN 61439-1,-3 EN 62208
Protection class	IP30 according to EN 60529
Protection class	I
Rated voltage	AC 240/415V; 50/60 Hz
Rated isolation voltage	AC 415V
Rated current range	max. 125/160 A (according to Incoming switch)
Max. power loss admitted for all devices integrated in the flat distribution board at an ambient temperature of 35°C:	
BF-O-2/48	74 W
BF-O-3/72	88 W
BF-O-4/96	102 W
BF-O-4/132	128 W
BF-O-5/120	117 W
BF-O-5/165	139 W
BF-O-6/144	131 W
BF-O-6/198	155 W

Mechanical

Enclosure	Steel sheet Polyester powder coated
Door	Steel sheet Polyester powder coated
Front plates	Steel sheet Polyester powder coated
DIN-rail frame	Steel sheet galvanised
Terminal support	PPO
Colour	white RAL 9016
Distance between DIN-Rails	150 mm
N/PE terminals max. 63 A	
	N PE
BF-O-2/48	2x25mm ² +9x16mm ² 2x25mm ² +27x16mm ²
BF-O-3/72	2x25mm ² +9x16mm ² 2x25mm ² +27x16mm ²
BF-O-4/96	2x25mm ² +9x16mm ² 2x25mm ² +43x16mm ²
BF-O-4/132	2x25mm ² +9x16mm ² 2x25mm ² +58x16mm ²
BF-O-5/120	2x25mm ² +9x16mm ² 2x25mm ² +58x16mm ²
BF-O-5/165	2x25mm ² +9x16mm ² 2x25mm ² +74x16mm ²
BF-O-6/144	2x25mm ² +9x16mm ² 2x25mm ² +58x16mm ²
BF-O-6/198	2x25mm ² +9x16mm ² 2x25mm ² +74x16mm ²

Cable entries above

	24MU per row		33MU per row	
	2x Flange:	14x ø11mm 8x ø15mm 2x ø28mm	3x Flange:	14x ø11mm 8x ø15mm 2x ø28mm
	Relief stamp:	2x M32/M40	Relief stamp:	1x M32/M40


Cable entries below

	24MU per row		33MU per row	
	Relief stamp:	2x M32/M40 6x M25 8x M20	Relief stamp:	1x M32/M40 12x M25 8x M20

BF-O Surface-mounted Flat Distribution Boards, IP30, Version A


Dimensions (mm)

Surface-mounting Flat Distribution Boards with 24MU per row

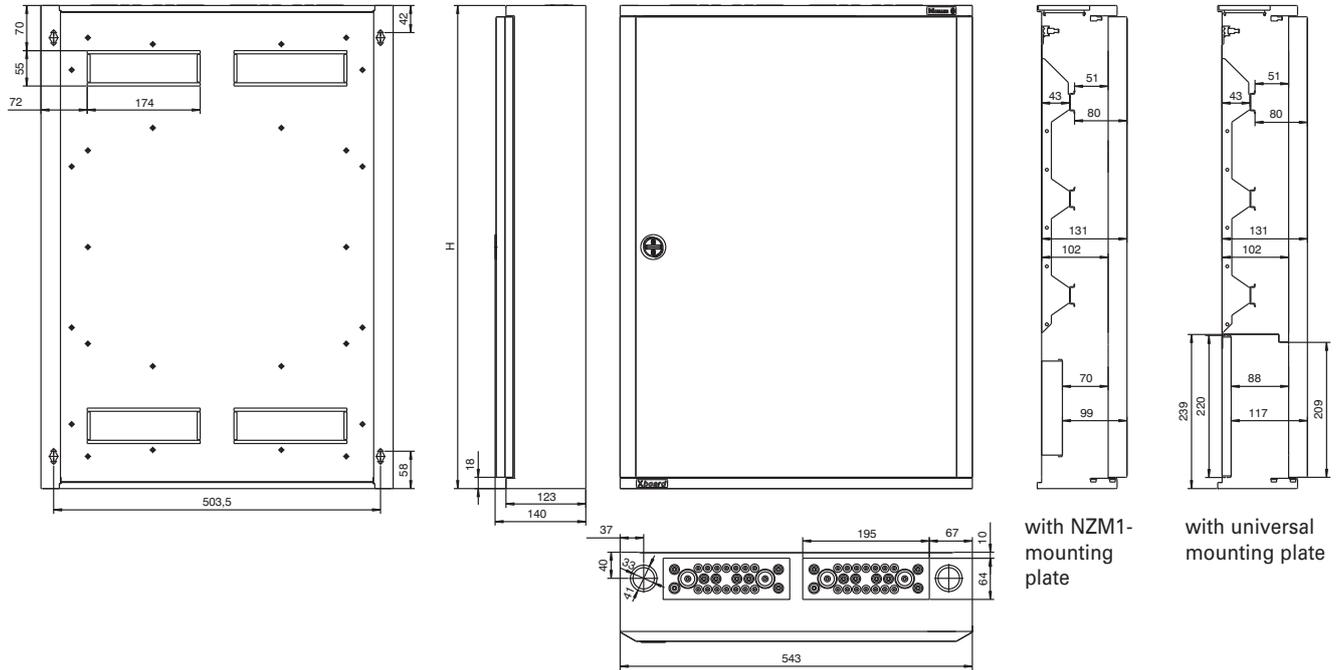

Type	H
BF-O-2/48-A	450
BF-O-3/72-A	600
BF-O-4/96-A	750
BF-O-5/120-A	900
BF-O-6/144-A	1050


Surface-mounting Flat Distribution Boards with 33MU per row

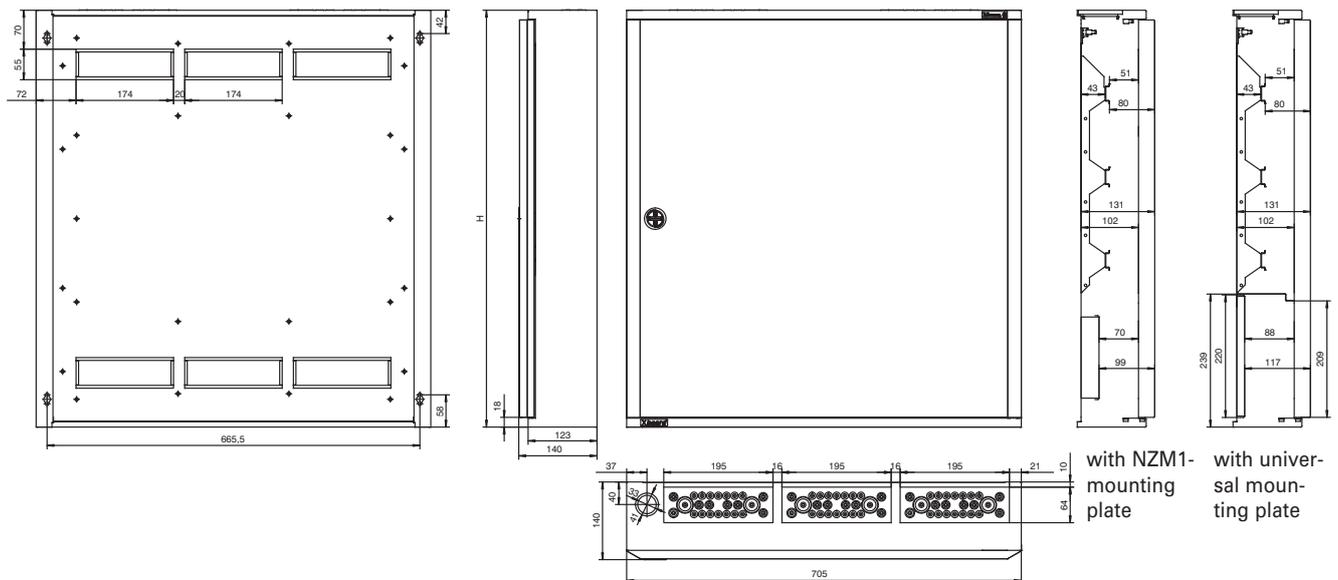

Type	H
BF-O-4/132-A	750
BF-O-5/165-A	900
BF-O-6/198-A	1050

BF-O Surface-mounted Flat Distribution Boards, IP30, Version E

Surface-mounted Flat Distribution Boards BF-O-/-E, complete



Scope of Delivery:

- Enclosure
- Door with Rotary Door handle Profi-Line
- DIN-rail frame
- Cable Entry Flange (above)
- Front plates
- Neutral and protective earth terminals

MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 2	BF-O-2/48-E	283040	1
24 / 3	BF-O-3/72-E	283041	1
24 / 4	BF-O-4/96-E	283042	1
24 / 5	BF-O-5/120-E	283043	1
24 / 6	BF-O-6/144-E	285220	1



wa_vt01713

BF-O Surface-mounted Flat Distribution Boards, IP30, Version E

Technical Data BF-O-./.-E

- Flat installation distribution board for surface-mounting
- 2- to 6-rows with 24 MU per row

Enclosure:

- Closed Construction including rear wall
- Rear wall useable as mounting area
- 2 cable entry flanges at flat distribution board with 24MU width at the top
- Pre stamped cable entry openings at the bottom
- Terminals pre mounted at the enclosure (no losing of Module Units)

Wall Box:

- Wall Box with door frame
- Rear wall useable as mounting area
- Easy removeable knock-outs
- 127 mm depth
- Terminals pre mounted at the enclosure (no losing of Module Units)
- 4 lateral mounting straps

Door:

- Steel sheet door with rotary door handle white in the scope of delivery
- Steel sheet door with additional depth (required to install RMO-Components at the door) is available as accessory (**BFZ-OTR-./...**)
- Steel sheet door with window is available as accessory (**BFZ-OTT-OR./...**)

DIN-Rail Frame:

- Removable DIN-rail frame
- For 45 mm Switchgear
- 150 mm distance between DIN-Rails
- Eaton MCCB integrate able by mounting set (**BFZ-NZM1-SET(33)**)
- Universal mounting set for surface mounted enclosure (**BFZ-O-ITMPL..**)

Front plate:

- Contacting of the metal front plate by special catch on enclosure

Electrical	
Design according to	EN 61439-1,-3 EN 62208
Protection class	IP30 according to EN 60529
Protection class	I
Rated voltage	AC 240/415V; 50/60 Hz
Rated isolation voltage	AC 415V
Rated current range	max. 125/160 A (according to Incoming switch)
Max. power loss admitted for all devices integrated in the flat distribution board at an ambient temperature of 35°C:	
BF-O-2/48	74 W
BF-O-3/72	88 W
BF-O-4/96	102 W
BF-O-5/120	117 W
BF-O-6/144	131 W

Mechanical		
Enclosure	Steel sheet	Polyester powder coated
Door	Steel sheet	Polyester powder coated
Front plates	Steel sheet	Polyester powder coated
DIN-rail frame	Steel sheet galvanised	
Terminal support	PPO	
Colour	white RAL 9016	
Distance between DIN-Rails	150 mm	
N/PE terminals max. 63 A	N	PE
BF-O-2/48	2x25mm ² +13x16mm ²	2x25mm ² +13x16mm ²
BF-O-3/72	2x25mm ² +13x16mm ²	2x25mm ² +13x16mm ²
BF-O-4/96	2x25mm ² +27x16mm ²	2x25mm ² +27x16mm ²
BF-O-5/120	2x25mm ² +27x16mm ²	2x25mm ² +27x16mm ²
BF-O-6/144	2x25mm ² +27x16mm ²	2x25mm ² +27x16mm ²

Cable entries above

24MU per row	
2x Flange:	14x ø11mm 8x ø15mm 2x ø28mm
Relief stamp:	2x M32/M40


Cable entries below

24MU per row	
Relief stamp:	2x M32/M40 6x M25 8x M20

BF-O Surface-mounted Flat Distribution Boards, IP30, Version A

Dimensions (mm)

Surface-mounting Flat Distribution Boards with 24MU per row

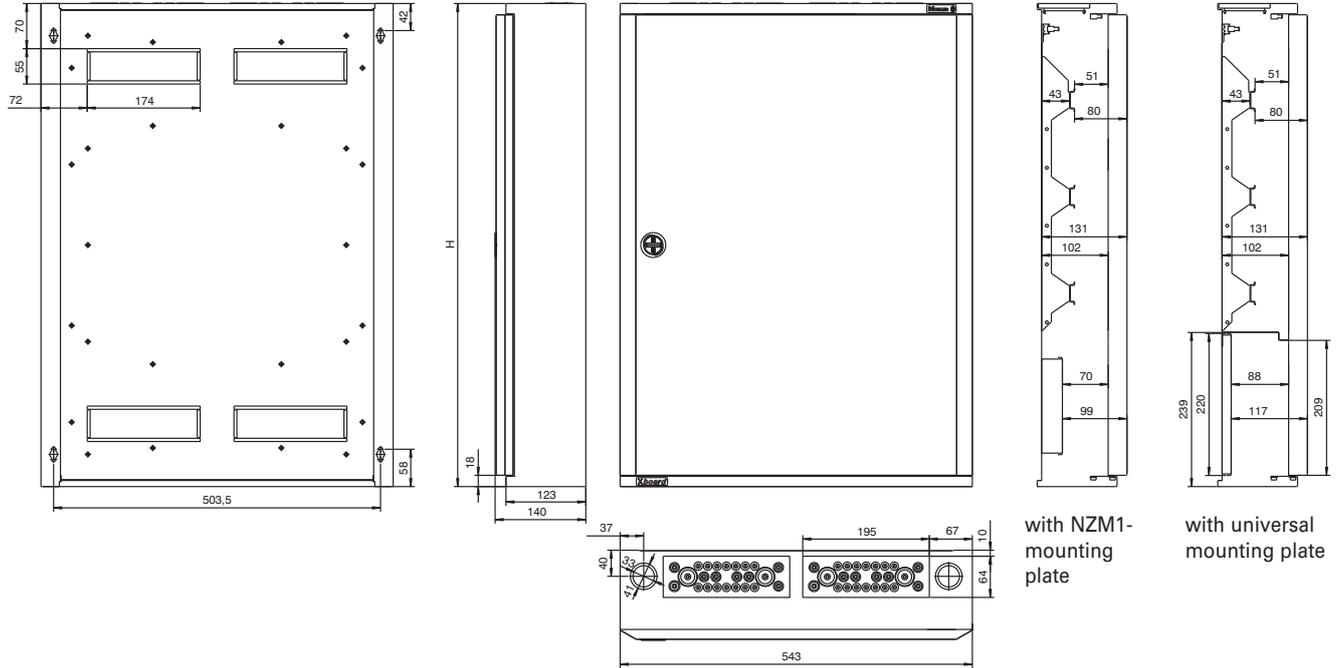

Type	H
BF-O-2/48-E	450
BF-O-3/72-E	600
BF-O-4/96-E	750
BF-O-5/120-E	900
BF-O-6/144-E	1050

BF-O Surface-mounted Flat Distribution Boards, IP30, Version C



Scope of Delivery:

- Enclosure (white oder grey)
- Door with Rotary Door handle (white and grey with or without window)
- DIN-rail frame
- Cable Entry Flange (above)
- Front plates (white oder grey)
- Neutral and protective earth terminals

Surface-mounted Flat Distribution Boards BF-O-./...(-G)-C without window, complete

	MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White				
	24 / 2	BF-O-2/48-C	113685	1
	24 / 3	BF-O-3/72-C	283031	1
	24 / 4	BF-O-4/96-C	283032	1
	24 / 5	BF-O-5/120-C	283033	1
	24 / 6	BF-O-6/144-C	283034	1
	33 / 4	BF-O-4/132-C	103091	1
	33 / 5	BF-O-5/165-C	103092	1
	33 / 6	BF-O-6/198-C	103093	1
Grey				
	24 / 2	BF-O-2/48-G-C	113686	1
	24 / 3	BF-O-3/72-G-C	283044	1
	24 / 4	BF-O-4/96-G-C	283045	1
	24 / 5	BF-O-5/120-G-C	283046	1
	24 / 6	BF-O-6/144-G-C	283047	1
	33 / 4	BF-O-4/132-G-C	103094	1
	33 / 5	BF-O-5/165-G-C	103095	1
	33 / 6	BF-O-6/198-G-C	103096	1

Surface-mounted Flat Distribution Boards BF-OT-./...(-G)-C with window, complete

	MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White				
	24 / 2	BF-OT-2/48-C	113687	1
	24 / 3	BF-OT-3/72-C	103103	1
	24 / 4	BF-OT-4/96-C	103104	1
	24 / 5	BF-OT-5/120-C	103105	1
	24 / 6	BF-OT-6/144-C	103106	1
	33 / 4	BF-OT-4/132-C	103107	1
	33 / 5	BF-OT-5/165-C	103108	1
	33 / 6	BF-OT-6/198-C	103109	1
Grey				
	24 / 2	BF-OT-2/48-G-C	113688	1
	24 / 3	BF-OT-3/72-G-C	103110	1
	24 / 4	BF-OT-4/96-G-C	103111	1
	24 / 5	BF-OT-5/120-G-C	103112	1
	24 / 6	BF-OT-6/144-G-C	103113	1
	33 / 4	BF-OT-4/132-G-C	103114	1
	33 / 5	BF-OT-5/165-G-C	103115	1
	33 / 6	BF-OT-6/198-G-C	103116	1

BF-O Surface-mounted Flat Distribution Boards, IP30, Version C

Technical Data BF-O-./...-C

- Flat installation distribution board for surface-mounting
- 2- to 6-rows with 24 MU per row
- 4- to 6-rows with 33 MU per row

Enclosure:

- Closed Construction including rear wall
- Rear wall useable as mounting area
- 2 cable entry flanges at flat distribution board with 24MU width at the top
- Pre stamped cable entry openings at the bottom
- Terminals pre mounted at the enclosure (no losing of Module Units)

Wall Box:

- Wall Box with door frame
- Rear wall useable as mounting area
- Easy removeable knock-outs
- 127 mm depth
- Terminals pre mounted at the enclosure (no losing of Module Units)
- 4 lateral mounting straps

Door:

- Steel sheet door with rotary door handle white and gray in the scope of delivery
- Steel sheet door with window white and grey in the scope of delivery
- Steel sheet door with additional depth (required to install RMQ-Components at the door) is available as accessory (**BFZ-OTR-J...**)

DIN-Rail Frame:

- Removable DIN-rail frame
- For 45 mm Switchgear
- 150 mm distance between DIN-Rails
- Eaton MCCB integrate able by mounting set (**BFZ-NZM1-SET(33)**)
- Universal mounting set for surface mounted enclosure (**BFZ-O-ITMPL...**)

Front plate:

- Contacting of the metal front plate by special catch on enclosure

Electrical

Design according to	EN 61439-1,-3 EN 62208
Protection class	IP30 according to EN 60529
Protection class	I
Rated voltage	AC 240/415V; 50/60 Hz
Rated isolation voltage	AC 415V
Rated current range	max. 125/160 A (according to Incoming switch)
Max. power loss for all devices integrated in the flat distribution board at an ambient temperature of 35°C:	
BF-O(T)-2/48	74 W
BF-O(T)-3/72	88 W
BF-O(T)-4/96	102 W
BF-O(T)-4/132	128 W
BF-O(T)-5/120	117 W
BF-O(T)-5/165	139 W
BF-O(T)-6/144	131 W
BF-O(T)-6/198	155 W

Mechanical

Enclosure	Steel sheet Polyester powder coated
Door	Steel sheet Polyester powder coated
Front plates	Steel sheet Polyester powder coated
DIN-rail frame	Steel sheet galvanised
Terminal support	PPO
Colour	white RAL 9016 grey RAL 7035
Distance between DIN-Rails	150 mm
N/PE terminals max. 63 A	
	N PE
BF-O-2/48	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-O-3/72	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-O-4/96	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-O-4/132	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²
BF-O-5/120	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-O-5/165	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²
BF-O-6/144	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-O-6/198	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²

Cable entries above

24MU per row		33MU per row	
2x Flange:	14x ø11mm 8x ø15mm 2x ø28mm	3x Flange:	14x ø11mm 8x ø15mm 2x ø28mm
Relief stamp:	2x M32/M40	Relief stamp:	1x M32/M40


Cable entries below

24MU per row		33MU per row	
Relief stamp:	2x M32/M40 6x M25 8x M20	Relief stamp:	1x M32/M40 12x M25 8x M20

BF-O Surface-mounted Flat Distribution Boards, IP30, Version C


Dimensions (mm)

Surface-mounting Flat Distribution Boards with 24MU per row

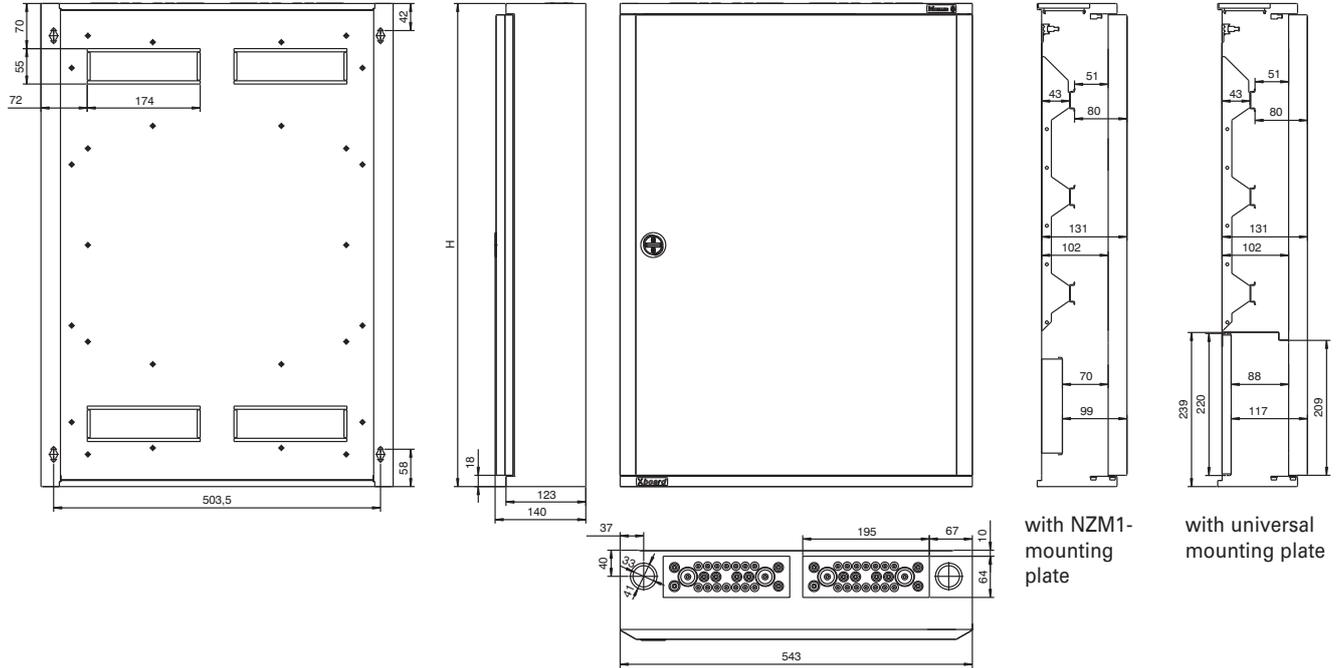

Type	H
BF-O-2/48(-G)-C	450
BF-O-3/72(-G)-C	600
BF-O-4/96(-G)-C	750
BF-O-5/120(-G)-C	900
BF-O-6/144(-G)-C	1050

Surface-mounting Flat Distribution Boards with 33MU per row

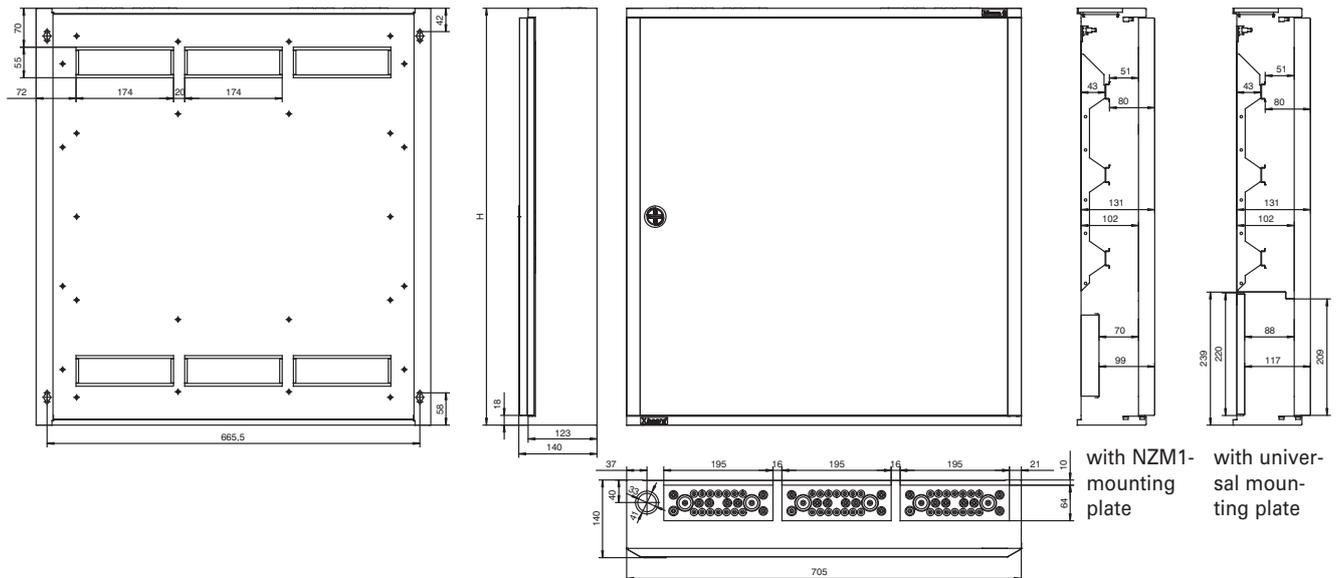


Type	H
BF-O-4/132(-G)-C	750
BF-O-5/165(-G)-C	900
BF-O-6/198(-G)-C	1050

BF-O Surface-mounted Flat Distribution Boards, IP30, Version P

Scope of Delivery:

- Enclosure
- Door with Rotary Door handle (with or without window)
- DIN-rail frame
- Cable Entry Flange (above)
- Front plates
- Neutral and protective earth terminals



Surface-mounted Flat Distribution Boards BF-O-./...(-G)-P without window, complete

MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 3	BF-O-3/72-P	285345	1
24 / 4	BF-O-4/96-P	285346	1
24 / 5	BF-O-5/120-P	285347	1
24 / 6	BF-O-6/144-P	285348	1



Surface-mounted Flat Distribution Boards BF-OT-./...(-G)-P with window, complete

MU per row / Number of rows	Type designation	Article No.	Pack (pcs.)
White			
24 / 3	BF-OT-3/72-P	289099	1
24 / 4	BF-OT-4/96-P	289130	1
24 / 5	BF-OT-5/120-P	289131	1
24 / 6	BF-OT-6/144-P	289132	1



BF-O Surface-mounted Flat Distribution Boards, IP30, Version P

Technical Data BF-O-./...-P

- Flat installation distribution board for surface-mounting
- 3- to 6-rows with 24 MU per row

Enclosure:

- Closed Construction including rear wall
- Rear wall useable as mounting area
- 2 cable entry flanges at flat distribution board with 24MU width at the top
- Pre stamped cable entry openings at the bottom
- Terminals pre mounted at the enclosure (no losing of Module Units)

Wall Box:

- Wall Box with door frame
- Rear wall useable as mounting area
- Easy removeable knock-outs
- 127 mm depth
- Terminals pre mounted at the enclosure (no losing of Module Units)
- 4 lateral mounting straps

Door:

- Steel sheet door with rotary door handle white or steel sheet door with window and rotary door handle white in the scope of delivery
- Steel sheet door with additional depth (required to install RMQ-Components at the door) is available as accessory (**BFZ-OTR-J...**)

DIN-Rail Frame:

- Removable DIN-rail frame
- For 45 mm Switchgear
- 150 mm distance between DIN-Rails
- Eaton MCCB integrate able by mounting set (**BFZ-NZM1-SET(33)**)
- Universal mounting set for surface mounted enclosure (**BFZ-O-ITMPL...**)

Front plate:

- Contacting of the metal front plate by special catch on enclosure

Electrical

Design according to	EN 61439-1,-3 EN 62208
Protection class	IP30 according to EN 60529
Protection class	I
Rated voltage	AC 240/415V; 50/60 Hz
Rated isolation voltage	AC 415V
Rated current range	max. 125/160 A (according to Incoming switch)
Max. power loss for all devices integrated in the flat distribution board at an ambient temperature of 35°C:	
BF-O-3/72	88 W
BF-O-4/96	102 W
BF-O-5/120	117 W

Mechanical

Enclosure	Steel sheet Polyester powder coated
Door	Steel sheet Polyester powder coated
Front plates	Steel sheet Polyester powder coated
DIN-rail frame	Steel sheet galvanised
Terminal support	PPO
Colour	white RAL 9016
Distance between DIN-Rails	150 mm
N/PE terminals max. 63 A	
	N PE
BF-O-3/72	2x25mm ² +43x16mm ² 2x25mm ² +43x16mm ²
BF-O-4/96	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²
BF-O-5/120	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²
BF-O-6/144	2x25mm ² +58x16mm ² 2x25mm ² +58x16mm ²

Cable entries above

24MU per row

2x Flange:	14x ø11mm 8x ø15mm 2x ø28mm
Relief stamp:	2x M32/M40

Cable entries below


24MU per row

Relief stamp:	2x M32/M40 6x M25 8x M20
---------------	--------------------------------

BF-O Surface-mounted Flat Distribution Boards, IP30, Version P

Dimensions (mm)

Surface-mounting Flat Distribution Boards with 24MU per row

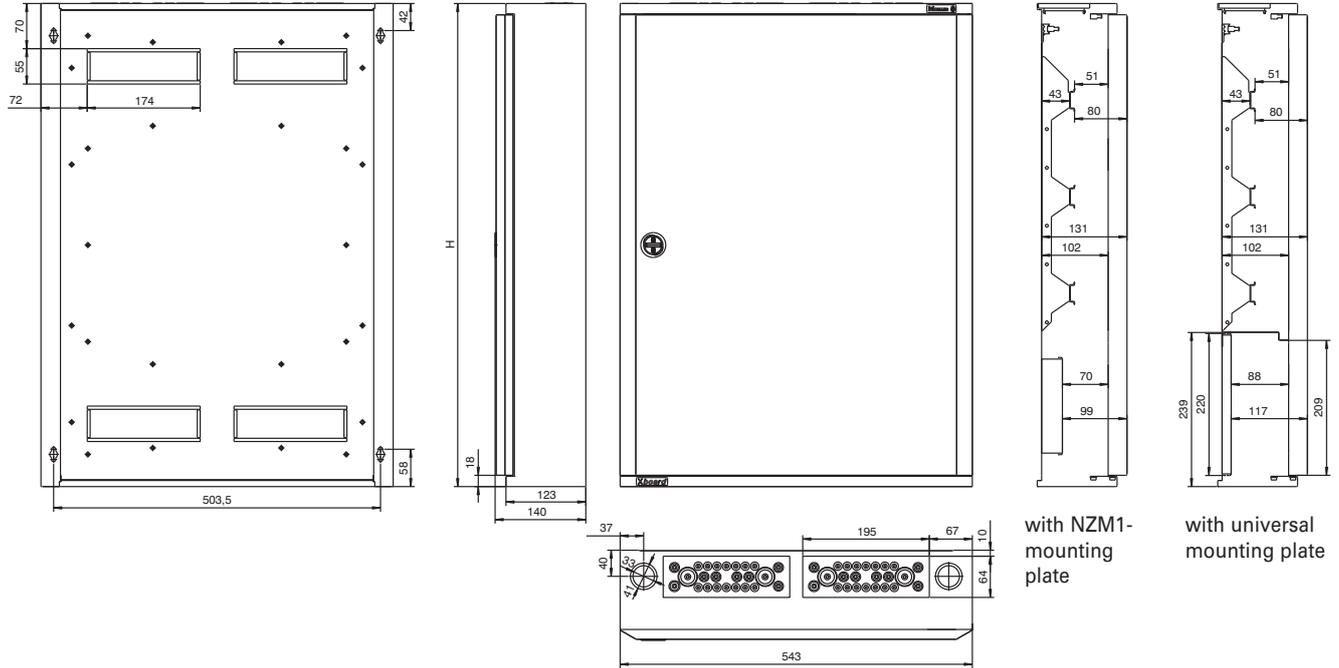


Type	H
BF-O(T)-3/72-P	600
BF-O(T)-4/96-P	750
BF-O(T)-5/120-P	900
BF-O(T)-6/144-P	1050

BF-O Surface-mounted Flat Distribution Boards, IP30


Allocation of front plate

Allocation of front plate (Delivery status), Version A

24MU per row

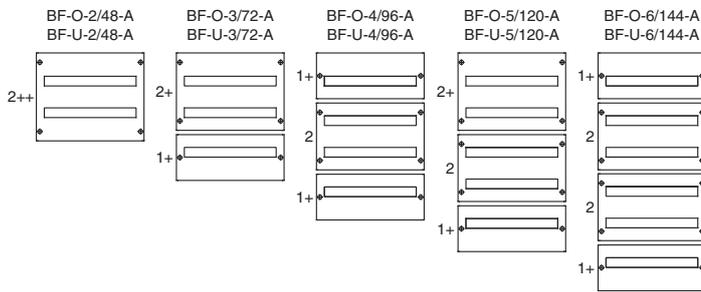


33MU per row

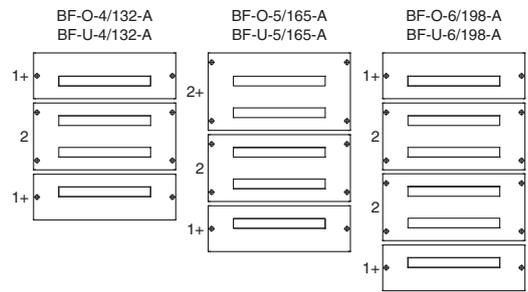


Allocation of front plate (Delivery status), Version E

24MU per row

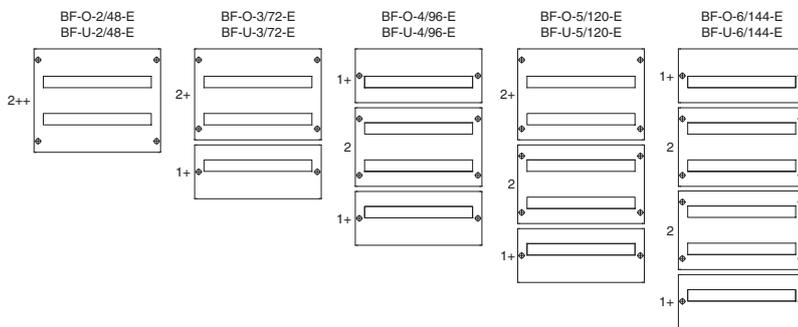


Allocation of front plate (Delivery status), Version C

24MU per row

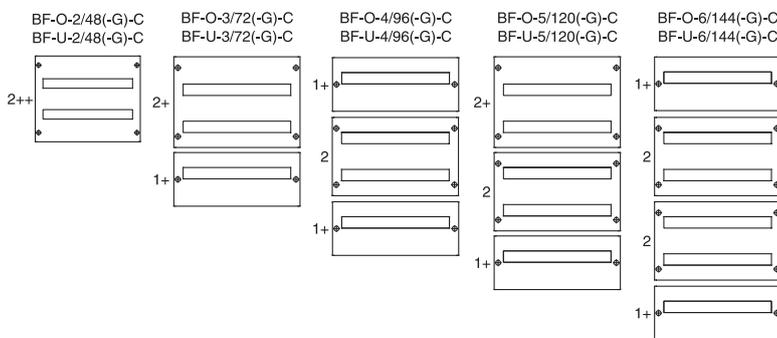


33MU per row

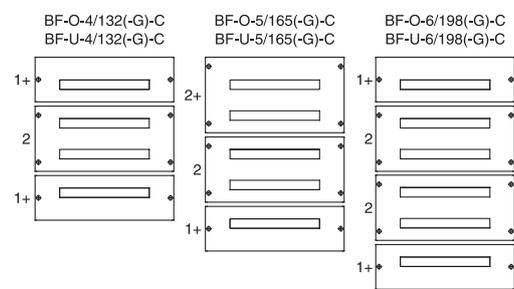

Allocation of front plate (Delivery status), Version P

24MU per row

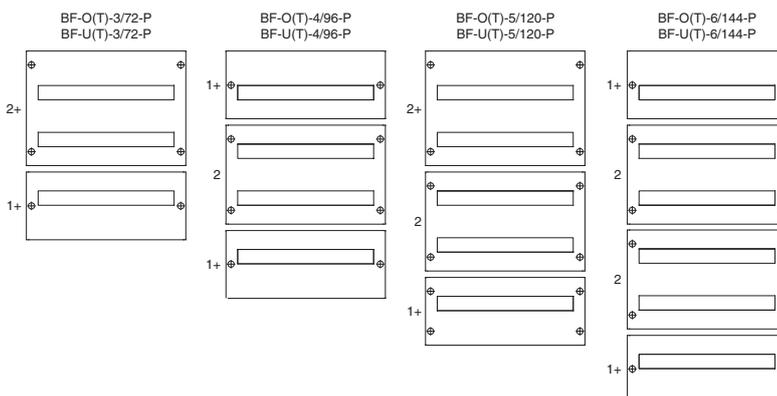

EWK Surface-mounted Field Distribution Boards, IP43

VT94514



- Degree of protection IP43, IK09
- Protection class II, fully insulated
- 160 mm enclosure depth
- Complete with door and installation field for add-on devices
- Combined plug-type terminals for neutral and protective conductor

VT90414



- Device cover with quick-acting closure
- 36 to 288 module units, 3 to 6 rows
- 16 different enclosure sizes
- Design with either one or two doors
- Larger enclosures with 3-point rod lock
- DIN carrier structure is fully withdrawable
- Stable and torsion-resistant DIN rail
- Large wiring area behind the DIN rail
- Possibility for direct fixing on the wall
- Quick and easy inversion of the door hinges
- 2K membrane flanges
- Body RAL 9016, door of non-transparent sheet steel

EWK Surface-Mounted Field Distribution Boards, IP43

Type Key

EWK	-	05		06		1	
Surface-mounted	-	Width	mm	Height	mm	Depth	mm
Field distribution board complete		MU					
		03	300	05	500	1	160
		05	550	06	650		
		08	800	08	800		
		10	1050	09	950		

System Overview - EWK Surface-mounted Field Distribution Boards, IP43

Compact DB fields Design	Protection class II (fully insulated)	Meets the European Standard EN 62208 ¹⁾ or EN 61439-3	IP43	IP54	RAL 9016	N/PE Terminals included	Installation included
EWK-...	■	■ ¹⁾	■	-	■ ²⁾	■ ³⁾	■ ⁴⁾
EWS-...	■	■ ¹⁾	■	-	■ ²⁾	-	-
EWP-...	■	■ ¹⁾	-	■	■ ²⁾	-	-

¹⁾ Prerequisite for transforming an empty enclosure into a distribution board according to IEC/EN 61439-3

²⁾ Body and door

³⁾ Combined plug-type terminal

⁴⁾ Installation fields are fully withdrawable

Legend EWK Surface-mounted Field Distribution Boards, IP43

Symbol	Explanation
	Protective insulation, according to EN 60670-24.
	Approved for indoor applications only.
	Glow-wire test according to IEC/EN 62208.

EWK Surface-mounted Field Distribution Boards, IP43

IP 43 (IK 09)



- Degree of protection IP43, IK09
- Protection class II, fully insulated
- Surface-mounted, enclosure depth of 160 mm
- Complete with door and installation field for add-on devices
- Combined plug-type terminals for neutral and protective conductor are included
- Device cover with quick-acting closure
- DIN carrier structure is fully withdrawable
- Stable and torsion-resistant DIN rail
- Large wiring area behind the DIN rail
- Possibility of direct fastening on the wall
- Wall-fastening straps are optionally available as an accessory
- Quick and easy inversion of the door hinges, 110° opening angle
- As of a width of 800 mm, the DB comes with a 3-point rod lock
- Standard closure is made of plastic, can be lead-sealed, other types of closures are available as an optional accessory
- 2K membrane flanges, at the top and bottom
- Body and door RAL9016, powder-coated
- According to EN 61439-3, rated current max. 125A

	Rows / MU	Description	Dimensions W x H x D [mm]	Type designation	Article No.	Pack (pcs.)
3 rows						
VT94514 	3 / 36	with 1x PE and 1x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	300x500x160	EWK-03051	174651	1
VT94214 	3 / 72	with 2x PE and 2x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	550x500x160	EWK-05051	174652	1
VT93914 	3 / 108	with 3x PE and 3x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	800x500x160	EWK-08051	174653	1
VT93414 	3 / 144	with 4x PE and 4x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	1050x500x160	EWK-10051	174654	1

EWK Surface-mounted Field Distribution Boards, IP43

IP 43 (IK 09)



	Rows / MUs	Description	Dimensions W x H x D [mm]	Type designation	Article No.	Pack (pcs.)
4 rows						
VT93114 	4 / 48	with 1x PE and 1x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	300x650x160	EWK-03061	174655	1
VT92114 	4 / 96	with 2x PE and 2x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	550x650x160	EWK-05061	174656	1
VT92514 	4 / 144	with 3x PE and 3x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	800x650x160	EWK-08061	174657	1
VT92214 	4 / 192	with 4x PE and 4x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	1050x650x160	EWK-10061	174658	1

EWK Surface-mounted Field Distribution Boards, IP43

IP 43 (IK 09)



	Rows / MUs	Description	Dimensions W x H x D [mm]	Typen designation	Article No.	Pack (pcs.)
5 rows						
VT91914 	5 / 60	with 1x PE and 1x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	300x800x160	EWK-03081	174659	1
VT91614 	5 / 120	with 2x PE and 2x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	550x800x160	EWK-05081	174660	1
VT91014 	5 / 180	with 3x PE and 3x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	800x800x160	EWK-08081	174661	1
VT90714 	5 / 240	with 4x PE and 4x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	1050x800x160	EWK-10081	174662	1

EWK Surface-mounted Field Distribution Boards, IP43

IP 43 (IK 09)



	Rows / MUs	Description	Dimensions W x H x D [mm]	Type designation	Article No.	Pack (pcs.)
6 rows						
 <p>VT91314</p>	6 / 72	with 1x PE and 1x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	300x950x160	EWK-03091	174663	1
 <p>VT89814</p>	6 / 144	with 2x PE and 2x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	550x950x160	EWK-05091	174664	1
 <p>VT90114</p>	6 / 216	with 3x PE and 3x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	800x950x160	EWK-08091	174665	1
 <p>VT90414</p>	6 / 288	with 4x PE and 4x N comb. plug-type terminal 6x 1.5-16 mm ² + 21x 0.75-4 mm ²	1050x950x160	EWK-10091	174666	1

EWK Surface-mounted Field Distribution Boards, IP43

Technical Details EWK-...

Unit	
Electrical	
Design according to	IEC/EN 61439-3
Degree of protection	IP43 (IK09) according to EN 60529
Protection class	II, fully insulated
Rated voltage	V 400 AC
Rated current max.	A 125
Insulation voltage	V 1000 AC
Max. power loss admitted for all devices installed in the distribution board, at 20°K temperature difference and 75% height:	
EWK-03051	W 21
EWK-05051	W 35
EWK-08051	W 49
EWK-10051	W 62
EWK-03061	W 26
EWK-05061	W 41
EWK-08061	W 57
EWK-10061	W 70
EWK-03081	W 32
EWK-05081	W 47
EWK-08081	W 67
EWK-10081	W 84
EWK-03091	W 36
EWK-05091	W 55
EWK-08091	W 73
EWK-10091	W 99

Mechanical

Material:	
Enclosure	Sheet steel, powder-coated with corrosion protection, inside lined with plastic (Polystyrole).
Door/frame	Sheet steel, powder-coated with corrosion protection
Colour of the enclosure	White RAL 9016
Colour of the door	Non-transparent, white RAL 9016
Door opening angle	° 110
Distance between the rows	mm 125
Device carrier rail	DIN rail 35 x 15 mm sheet steel, galvanised
UV resistant	No
Installation type	
EWK-...	Indoor
Halogen-free, RoHs	<1%, yes


Metrical pre-punched holes

EWK-03...	1x 2K membrane flange top 1x 2K membrane flange bottom
EWK-05...	2x 2K membrane flange top 2x 2K membrane flange bottom
EWK-08...	3x 2K membrane flange top 3x 2K membrane flange bottom
EWK-10...	4x 2K membrane flange top 4x 2K membrane flange bottom
Per 2K membrane flange:	1x 5-47 mm 2x 5-29 mm 2x 5-18 mm 28x 5-11 mm 2x 5-9 mm 2x 16/21/29/38 mm 10x 16 mm

Note: The tightening torques [Nm] of the N/PE combined plug-type terminal are indicated on the terminal enclosure.

EWK Surface-mounted Field Distribution Boards, IP43

Dimensions (mm)

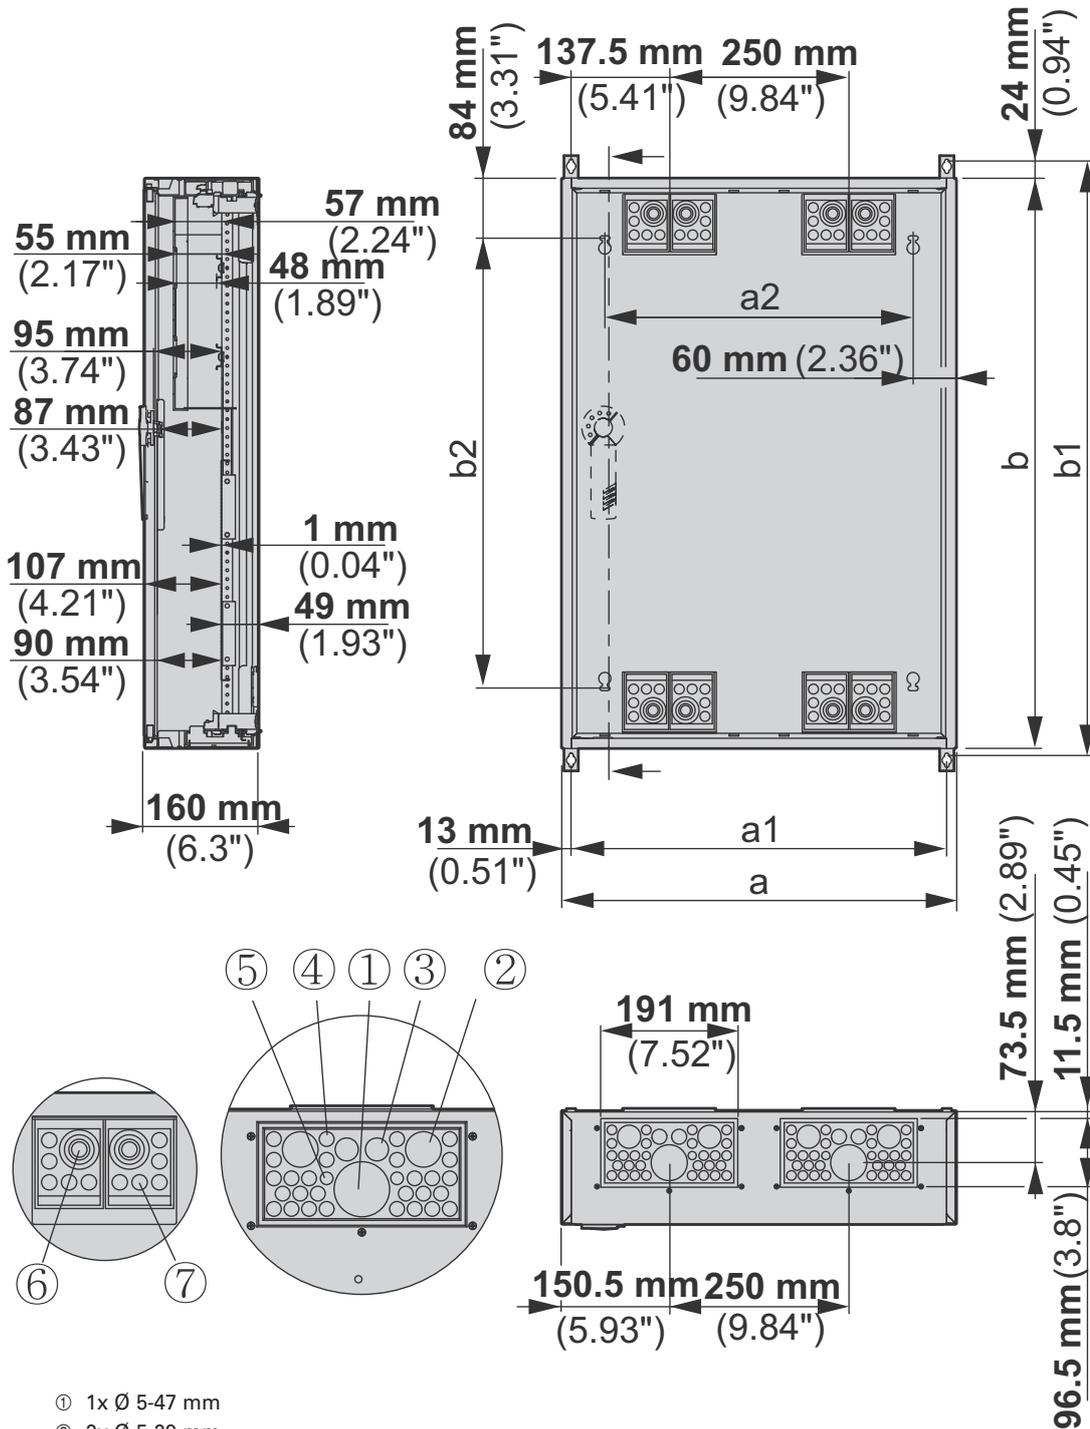

See next page for tables specifying the respective values!

EWK Surface-mounted Field Distribution Boards, IP43

Dimensions (mm)

Type	a [mm]	b [mm]	a1 [mm]	b1 [mm]	a2 [mm]	b2 [mm]
EWK-03051	301	502	275	535	181	333
EWK-05051	551	502	525	535	431	333
EWK-08051	801	502	775	535	681	333
EWK-10051	1051	502	1025	535	931	333
EWK-03061	301	652	275	685	181	483
EWK-05061	551	652	525	685	431	483
EWK-08061	801	652	775	685	681	483
EWK-10061	1051	652	1025	685	931	483
EWK-03081	301	802	275	835	181	633
EWK-05081	551	802	525	835	431	633
EWK-08081	801	802	775	835	681	633
EWK-10081	1051	802	1025	835	931	633
EWK-03091	301	952	275	985	181	783
EWK-05091	551	952	525	985	431	783
EWK-08091	801	952	775	985	681	783
EWK-10091	1051	952	1025	985	931	783

Additional Equipment, Spare Parts

VT30414



VT29914



VT30314



VT27614



v121515



v1115714



v121615



Additional Equipment / Spare Parts Mini

VT79314



Suitable for	Description	Type designation	Article No.	Pack (pcs.)
Window				
1 / 2	Transparent window	T2-MINI	177076	1 / 10
1 / 3	Transparent window	T3-MINI	177077	1 / 10
1 / 4	Transparent window	T4-MINI	177078	1 / 10
1 / 5	Transparent window	T5-MINI	177079	1 / 10
1 / 6	Transparent window	T6-MINI	177080	1 / 10

Additional Equipment / Spare Parts IKA-...

	Suitable for	Description	Type designation	Article No.	Pack (pcs.)
	Lock with 2 spare keys				
	all IKA	lock with 2 keys, keyed alike	LOCK-KIT-IKA	174166	1
	Linking element				
	all IKA	M32 linking element for linking several IKA enclosures placed next to each other	M32LUG-IKA	174168	2
	IP2X Screw-type terminal				
	1 / 4	N/PE screw terminal	N/PE-4-IKA	174169	1
	1 / 6	3x 2.5-6 + 1x 4-10 mm ² each and 1x 16-35 mm ² each			
	1 / 8	N/PE screw terminal 5x 2.5-6 + 3x 4-10 mm ² each and 1x 16-35 mm ² each	N/PE-8-IKA	174171	1
	1 / 12	N/PE screw terminal 6x 2.5-6 + 6x 4-10 mm ² each and 1x 10-25 + 1x 16-35 mm ² each	N/PE-12-IKA	174172	1
	2 / 24	N/PE screw terminal	N/PE-24-IKA	174173	1
	1 / 18	8x 2.5-6 + 8x 4-10 mm ² each and 1x 10-25 + 1x 16-35 mm ² each			
	3 / 36	N/PE screw terminal	N/PE-3/36-IKA	174174	1
	2 / 36	12x 2.5-6 + 12x 4-10 mm ² each			
	3 / 54	and 1x 10-25 + 1x 16-35 mm ² each			

Metric diaphragm grommets

- IP66, with built-in push-through diaphragm
- PE and thermoplastic elastomer, halogen free

	Cable entry	Hole diameter mm	Outer cable diameter mm	Specifications for NYM/NYY, 4-wire cables mm ²	Part no.	Article no.	Std. pack
	M16	16.5	1 – 9	H03VV-F3 x 0.75 mm ² , NYM 1 x 16/3 x 1.5 mm ²	KT-M16	216983	100
	M20	20.5	1 – 13	H03VV-F3 x 0.75 mm ² , NYM 5 x 1.5/5 x 2.5 mm ²	KT-M20	207602	100
	M25	25.5	1 – 18	H03VV-F3 x 0.75 mm ² , NYM 4 x 10 mm ²	KT-M25	207603	100
	M32	32.5	1 – 25	H03VV-F3 x 0.75 mm ² , NYM 4 x 16/5 x 10 mm ²	KT-M32	207604	100

Metric cable glands to EN 50262

Metric cable glands with lock nut and built-in strain relief

- IP68 up to 5 bar, polyamide, halogen free
- Flammability classification V2 according to UL94

	Cable entry	Hole diameter mm	Outer cable diameter mm	Specifications for NYM/NYY, 4-wire cables mm ²	Part no.	Article no.	Std. pack
	M12	12.5	3 – 7	H03VV-F 3 x 0.75 mm ² , NYM 1 x 2.5 mm ²	V-M12	215078	20
	M16	16.5	4.5 – 10	H05VV-F 3 x 1.5 mm ² , NYM 1 x 16/3 x 1.5 mm ²	V-M16	215077	20
	M20	20.5	6 – 13	H05VV-F 4 x 2.5/3 x 4 mm ² , NYM 5 x 1.5/5 x 2.5 mm ²	V-M20	206910	20
	M25	25.5	9 – 17	H05VV-F 5 x 2.5/5 x 4 mm ² , NYM 5 x 2.5/5 x 6 mm ²	V-M25	206911	20
	M32	32.5	13 – 21	NYM 5 x 10 mm ²	V-M32	206912	10
	M40	40.5	16 – 28	NYM 5 x 16 mm ²	V-M40	209668	10
	M50	50.5	21 – 35	NYM 4 x 35/5 x 25 mm ²	V-M50	206913	5
	M63	63.5	34 – 48	NYM 4 x 35 mm ²	V-M63	214835	3

Additional Equipment / Spare Parts IKA-...


	Suitable for	Description	Type designation	Article No.	Pack (pcs.)
Spare closing bolts					
	all IKA	Closing plug made of insulating material, lead-sealable	BOLT-IKA	174178	20
Spare hinges					
	all IKA	Hinges made of insulating material	HINGE-IKA	174186	20
Spare lock					
	all IKA	Lock consisting of locking unit and logo clip	ETN-IKA	174185	10
Spare plug					
	all IKA	Plugs for covering the holes for wall-mounting	HCAP-IKA	174167	20
Spare doors					
	1 / 4	Transparent, incl. lock	DOOR-1/4-T-IKA	174179	1
		Non-transparent, incl. lock	DOOR-1/4-R-IKA ¹⁾	174227	1
	1 / 6	Transparent, incl. lock	DOOR-1/6-T-IKA	174180	1
		Non-transparent, incl. lock	DOOR-1/6-R-IKA ¹⁾	174228	1
	1 / 8	Transparent, incl. lock	DOOR-1/8-T-IKA	174181	1
		Non-transparent, incl. lock	DOOR-1/8-R-IKA ¹⁾	174229	1
	1 / 12	Transparent, incl. lock	DOOR-1/12-T-IKA	174182	1
		Non-transparent, incl. lock	DOOR-1/12-R-IKA ¹⁾	174230	1
	2 / 24	Transparent, incl. lock	DOOR-2/24-T-IKA	174183	1
		Non-transparent, incl. lock	DOOR-2/24-R-IKA ¹⁾	174231	1
	3 / 36	Transparent, incl. lock	DOOR-3/36-T-IKA	174223	1
		Non-transparent, incl. lock	DOOR-3/36-R-IKA ¹⁾	174232	1
	1 / 18	Transparent, incl. lock	DOOR-1/18-T-IKA	174224	1
		Non-transparent, incl. lock	DOOR-1/18-R-IKA ¹⁾	174233	1
	2 / 36	Transparent, incl. lock	DOOR-2/36-T-IKA	174225	1
		Non-transparent, incl. lock	DOOR-2/36-R-IKA ¹⁾	174234	1
	3 / 54	Transparent, incl. lock	DOOR-3/54-T-IKA	174226	1
		Non-transparent, incl. lock	DOOR-3/54-R-IKA ¹⁾	174184	1
¹⁾ Available upon request					
Spar flange plate					
	IKA-C ...-LID	Spar flange plate for IKA-C....-LID	LID1-IKA	187355	1

Additional Equipment / Spare Parts IKA-...

	Suitable for	Description	Type designation	Article No.	Pack (pcs.)
Connection piece					
	all IKA	Connection piece M25 for connecting multiple enclosures IKA next to each other	M25LUG-IKA	187353	1
	all IKA	Connection piece M40 for connecting multiple enclosures IKA next to each other	M40LUG-IKA	187354	1






Additional Equipment KLV-...

- Combined plug-type terminal with plug-in terminal points for 0.5-4 mm² round conductors and screw-type terminal points for 2.5-25 mm² round conductors
- Terminal carriers KSK-KLV can be expanded by up to 4 individual N blocks for separate RCD protective circuits, or by additional PE blocks
- Terminal carriers are easy to snap on without any tools
- Finger proof IP2X




	Can be used for	Description	Type designation	Article No.	Pack (pcs.)
Equipped combined plug-type terminal KSK					
	1x N potential 1x PE potential	N/PE comb. plug-type terminal 2x 2.5-25 mm ² each and 14x 0.5-4 mm ² each	KSK-2N/2PE-KLV	178898	1
	1x N potential	N comb. plug-type terminal 4x 2.5-25 mm ² and 28x 0.5-4 mm ²	KSK-4N-KLV	178899	1
	2x N potential	N/N comb. plug-type terminal 4x 2.5-25 mm ² and 28x 0.5-4 mm ²	KSK-3N/1N-KLV	178900	1
	2x N potential	N/N comb. plug-type terminal 4x 2.5-25 mm ² and 28x 0.5-4 mm ²	KSK-2N/2N-KLV	178901	1
	1x PE potential	PE comb. plug-type terminal 4x 2.5-25 mm ² and 28x 0.5-4 mm ²	KSK-4PE-KLV	178902	1
Individual combined plug-type terminal KSK					
	1x N potential	N comb. plug-type terminal 1x 2.5-25 mm ² 7x 0.5-4 mm ²	KSK-N	178903	1/10
	1x PE potential	PE comb. plug-type terminal 1x 2.5-25 mm ² 7x 0.5-4 mm ²	KSK-PE	178904	1/10
	KSK-N and KSK-PE	Terminal carrier empty suitable for up to 4x KSK-N and/or 4x KSK-PE	KSK-KLV	178905	1/10

Additional Equipment KLV-...

- N/PE screw-type terminal, electric shock protection for 0.75-25 mm² round conductors
- Terminal carriers SK-KLV can be expanded by additional N blocks for separate RCD protective circuits
- The additional block is easy to insert in the terminal carrier
- Cover in blue, green or blue/green

	Suitable for	Description	Type designation	Article No.	Pack (pcs.)
Equipped screw-type terminal SK					
 vt24215	1x N potential 1x PE potential	N/PE screw-type termin. 13x 0.75-16 mm ² (N) and 13x 0.75-16 mm ² (PE)	SK-13N/PE-KLV	178906	1
 vt24115	1x N potential 1x PE potential	N/PE screw-type termin. 13x 0.75-16 mm ² (N) and 16x 0.75-16 mm ² (PE)	SK-13N/16PE-KLV	178907	1
 vt24415	1x N potential	N screw-type terminal 25x 0.75-16 mm ² (N)	SK-25N-KLV	178908	1
 vt24315	1x PE potential	PE screw-type terminal 25x 0.75-16 mm ² (N)	SK-25PE-KLV	178909	1
Individual screw-type terminal KL					
 VT1800	N potential or PE potential	1x 25 mm ² + 3x 16 mm ²	KL-4	219723	1
		1x 25 mm ² + 6x 16 mm ²	KL-7	219724	1
		2x 25 mm ² + 9x 16 mm ²	KL-11	219725	1
		2x 25 mm ² + 13x 16 mm ²	KL-15	219726	1
		2x 25 mm ² + 23x 16 mm ²	KL-25	219727	1
 vt24515	KL-4 to KL-25	Terminal carrier empty suitable for up to 27x screw-terminal points, incl. cover in blue and green	SK-KLV	178910	1
 vt24615	1x N potential	N-FI expansion terminal for wall pan with screw-type terminal 1x 25 mm ² + 3x 16 mm ² incl. cover in blue	N-FI-KLV	178911	1
 vt24715	SK-...KLV	Expansion terminal with screw-type connection 1x 35 mm ²	KLA	275453	1

Additional Equipment KLV-...

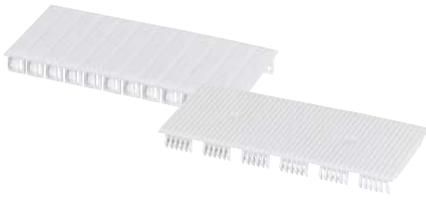	Can be used for	Description	Type designation	Article No.	Pack (pcs.)	
Lock set LOCK-KLV						
	KLV-...	Lock set for sheet steel door, keyed alike, incl. 2 keys	LOCK-KLV	178930	1	
Blanking strip BS-...-WH						
	All Eaton distribution boards	Blanking strip, white, fine-ribbed, 12 MU	BS-12MF-WH	178975	10/100	
		Blanking strip, gray, fine-ribbed, 12 MU	BS-12MF-GY	178980	10/100	
		Blanking strip, white, fine-ribbed, 6 MU	BS-6MF-WH	178976	10/100	
		Blanking strip, white, rough-ribbed, 12 MU	BS-12MB-WH	178977	10/100	
		Blanking strip, gray, rough-ribbed, 12 MU	BS-12MB-GY	178979	10/100	
		Blanking strip, white, rough-ribbed, 6 MU	BS-6MB-WH	178978	10/100	
Internal partition ¹⁾						
		Partition horizontal as a partition between the rows, insulation material, can be combined with VS...-KLV	1 - 4 rows KLV-HW... and KLV-UP...	HS-KLV	178931	1
		Partition vertical for internal separation, insulation material, can be comb. w. HS-KLV	KLV-12... KLV-24... KLV-36... KLV-48...	VS1-KLV VS2-KLV VS3-KLV VS4-KLV	178932 178933 178934 178935	1 1 1 1
Reinforcement template VSB...-KLV						
		Reinforcement template for poured concrete mounting	KLV-12... KLV-24... KLV-36... KLV-48...	VSB1-KLV VSB2-KLV VSB3-KLV VSB4-KLV	178936 178937 178938 178939	1 1 1 1
Industrial cable tie-wrap ITB						
		Continuously ribbed to the tip, colour natural, flame retardant UL94 V2	ITB1 ITB2 ITB3	083550 085923 088296	1000 1000 100	

¹⁾ Not suitable for multimedia


Additional Equipment KLV-...

	Description	Can be used for	Type designation	Article No.	Pack (pcs.)
	<p>3D Plaster compensation</p> <p>3D plaster compensation as a set in a pouch</p>	KLV-...	3D-KLV	178940	1
	<p>Hollow-wall anchor</p> <p>Hollow-wall anchor as a set in a pouch</p>	KLV-...	HWS-KLV	178941	1
	<p>Nail straps</p> <p>Nail straps as a set in a pouch</p>	KLV-...	NL-KLV	178942	1
	<p>Rotary bolt lock</p> <p>Rotary bolt lock white</p>	KLV-...	DV-KLV	178943	1
	<p>Flange</p> <p>Spare flange without spirit level</p>	<p>KLV-UP...</p> <p>KLV-HW...</p>	<p>FUP-KLV</p> <p>FHW-KLV</p>	<p>178944</p> <p>178945</p>	<p>1</p> <p>1</p>
	<p>Hinge</p> <p>Spare hinges 1 pair in a pouch</p>	KLV-...	HP-KLV	178946	1
	<p>Cable holders</p> <p>Cable holders 4 units in a pouch</p>	KLV-...	KH-KLV	178947	1
	<p>Closing screws</p> <p>Closing screws 4 units in a pouch</p>	KLV-...	VS-KLV	178948	1

Additional Equipment KLV-...

	Description	Can be used for	Type designation	Article No.	Pack (pcs.)
	Spare wall pan flush-mounted	KLV-UP...	UP1-KLV	178949	1
			UP2-KLV	178950	1
			UP3-KLV	178951	1
			UP4-KLV	178952	1
	Spare wall pan hollow-wall	KLV-HW...	HW1-KLV	178953	1
			HW2-KLV	178954	1
			HW3-KLV	178955	1
			HW4-KLV	178956	1
	Spare carrier rails incl. fixing screws	KLV-...	TS1-KLV	178957	1
			TS2-KLV	178958	1
			TS3-KLV	178959	1
			TS4-KLV	178960	1
	Spare device cover flush-mounted	KLV-UP...	GAU1-KLV	178961	1
			GAU2-KLV	178962	1
			GAU3-KLV	178963	1
			GAU4-KLV	178964	1
	Spare device cover hollow-wall	KLV-HW...	GAH1-KLV	178965	1
			GAH2-KLV	178912	1
			GAH3-KLV	178913	1
			GAH4-KLV	178914	1
	Add-on connector set for DBs, side by side, 1 pair in a pouch	KLV-...	AVH-KLV	178915	1
	Add-on connector set for DBs, on top of each other, 1 pair in a pouch	KLV-...	AVV-KLV	178916	1
	Mounting plate, micro-perforated, galvanised sheet steel, incl. fixing screws	KLV-36... KLV-48...	MIP3-KLV	178917	1
			MIP4-KLV	178918	1
	Rounded head screw M4x8 thread-forming	MIP3-KLV MIP4-KLV	EPLHS-M4X8	144028	1/100

Additional Equipment KLV-...

	Description	Can be used for	Type designation	Article No.	Pack (pcs.)
Doors					
	Spare door white, without hinges and without rotary bolt lock	KLV-...-F and KLV-...-SF	T1-KLV	178919	1
			T2-KLV	178920	1
			T3-KLV	178921	1
			T4-KLV	178922	1
Doors with ventilation slots					
	Spare doors with ventilation slots white, without hinges and without rotary bolt lock	KLV-...-F and KLV-...-SF	TM3-KLV	178923	1
			TM4-KLV	178924	1
Door frames					
	Spare door frames optionally flat (F) or super flat (SF), white, without hinges and without 3D plaster compensation	KLV-...	TRF1-KLV	178925	1
			TRF2-KLV	178926	1
			TRF3-KLV	178927	1
			TRF4-KLV	178928	1
			TRSF1-KLV	178929	1
			TRSF2-KLV	178966	1
			TRSF3-KLV	178967	1
TRSF4-KLV	178968	1			
Device holder					
	Device holder for multimedia DBs, incl. fixing screws	Multimedia	GH-KLV	178969	1
Single and double electricity socket EURO2					
	Socket with EURO2 insert and plug-in technology up to 2.5 mm ² for multimedia DBs, incl. fixing screws	Multimedia	S1-KLV	178970	1
			S2-KLV	178971	1
Holding bracket for sockets					
	Holding bracket for multimedia DBs, incl. fixing screws	Multimedia	HA-KLV	178972	1
Data module					
	Data module for the carrier rail 1 MU, with RJ45 jack or F/IEC coaxial jack	RJ45 Coaxial	E-DAT-RJ45	178973	1
			E-DAT-F/IEC-B	178974	1
Labels sheet					
	Labels sheet self-adhesive, for power circuit labelling and numbering, photo symbols	KLV-...	KLV-BSB	279268	20

Additional Equipment / Spare Parts BF-O..., BF-U...

Doors sheet steel, BFZ-TS

	for: MU per rows / Number of rows	Type designation	Article No.	Pack (pcs.)
For surface-mounting enclosure white				
VT15004 	24 / 2	BFZ-OTS-2/48	283070	1
	24 / 3	BFZ-OTS-3/72	283071	1
	24 / 4	BFZ-OTS-4/96	283072	1
	24 / 5	BFZ-OTS-5/120	283073	1
	24 / 6	BFZ-OTS-6/144	283074	1
	33 / 4	BFZ-OTS-4/132	240756	1
	33 / 5	BFZ-OTS-5/165	240757	1
	33 / 6	BFZ-OTS-6/198	240758	1
For flush-mounting enclosure white				
VT15705 	24 / 2	BFZ-UTS-2/48	283084	1
	24 / 3	BFZ-UTS-3/72	283085	1
	24 / 4	BFZ-UTS-4/96	283086	1
	24 / 5	BFZ-UTS-5/120	283087	1
	24 / 6	BFZ-UTS-6/144	283088	1
	33 / 4	BFZ-UTS-4/132	240759	1
	33 / 5	BFZ-UTS-5/165	240760	1
	33 / 6	BFZ-UTS-6/198	240761	1
For surface-mounting enclosure grey				
VT04305 	24 / 3	BFZ-OTS-3/72-G	283075	1
	24 / 4	BFZ-OTS-4/96-G	283076	1
	24 / 5	BFZ-OTS-5/120-G	283077	1
	24 / 6	BFZ-OTS-6/144-G	283078	1
For flush-mounting enclosure grey				
VT20405 	24 / 3	BFZ-UTS-3/72-G	283089	1
	24 / 4	BFZ-UTS-4/96-G	283090	1
	24 / 5	BFZ-UTS-5/120-G	283091	1
	24 / 6	BFZ-UTS-6/144-G	283092	1

Doors sheet steel "RMQ", BFZ-OTR

- steel-sheet doors with more depth (suitable for mounting of e.g. RMQ in the door)
- with Ronis locking-system 455

	for: MU per rows / Number of rows	Type designation	Article No.	Pack (pcs.)
For surface-mounting enclosure white				
wa_vt48513 	24 / 2	BFZ-OTR-2/48	285643	1
	24 / 3	BFZ-OTR-3/72	285644	1
	24 / 4	BFZ-OTR-4/96	285645	1
	24 / 5	BFZ-OTR-5/120	285646	1
	24 / 6	BFZ-OTR-6/144	285647	1

Additional Equipment / Spare Parts BF-O..., BF-U...

Doors transparent (sheet steel), BFZ-TT

	for: MU per rows / Number of rows	Type designation	Article No.	Pack (pcs.)
For surface-mounting enclosure white				
	24 / 2	BFZ-OTT-2/48	283079	1
	24 / 3	BFZ-OTT-3/72	283080	1
	24 / 4	BFZ-OTT-4/96	283081	1
	24 / 5	BFZ-OTT-5/120	283082	1
	24 / 6	BFZ-OTT-6/144	283083	1
	33 / 4	BFZ-OTT-4/132	240762	1
	33 / 5	BFZ-OTT-5/165	240763	1
	33 / 6	BFZ-OTT-6/198	240764	1
For flush-mounting enclosure white				
	24 / 2	BFZ-UTT-2/48	283093	1
	24 / 3	BFZ-UTT-3/72	283094	1
	24 / 4	BFZ-UTT-4/96	283095	1
	24 / 5	BFZ-UTT-5/120	283096	1
	24 / 6	BFZ-UTT-6/144	285353	1
	33 / 4	BFZ-UTT-4/132	240765	1
	33 / 5	BFZ-UTT-5/165	240766	1
	33 / 6	BFZ-UTT-6/198	240767	1

Doors transparent with Profi Line handle (sheet steel), BFZ-TT-DR

	for: MU per rows / Number of rows	Type designation	Article No.	Pack (pcs.)
For surface-mounting enclosure white				
	24 / 2	BFZ-OTT-DR-2/48	285222	1
	24 / 3	BFZ-OTT-DR-3/72	285223	1
	24 / 4	BFZ-OTT-DR-4/96	285224	1
	24 / 5	BFZ-OTT-DR-5/120	285225	1
	24 / 6	BFZ-OTT-DR-6/144	285226	1
	For flush-mounting enclosure white			
	24 / 2	BFZ-UTT-DR-2/48	285227	1
	24 / 3	BFZ-UTT-DR-3/72	285228	1
	24 / 4	BFZ-UTT-DR-4/96	285229	1
	24 / 5	BFZ-UTT-DR-5/120	285230	1
	24 / 6	BFZ-UTT-DR-6/144	285231	1



Additional Equipment / Spare Parts BF-O..., BF-U...

Accessories

	for: MU per rows / Number of rows	Type designation	Article No.	Pack (pcs.)	
Front plates blind white, BFZ-FP					
	24 / 0+	BFZ-FP-0+/BL	286106	1	
	24 / 1	BFZ-FP-1/BL	293626	1	
	24 / 1+	BFZ-FP-1+/BL	286105	1	
	33 / 1	BFZ-FP-1/BL3	293627	1	
	33 / 1+	BFZ-FP-1+/BL3	240752	1	
Front plates blind grey, BFZ-FP-G					
	24 / 0+	BFZ-FP-0+/BL-G	113694	1	
	24 / 1	BFZ-FP-1/BL-G	113695	1	
	24 / 1+	BFZ-FP-1+/BL-G	113696	1	
	33 / 1	BFZ-FP-1/BL3-G	113697	1	
	33 / 1+	BFZ-FP-1+/BL3-G	113698	1	
Front plates 45mm-Device cutout white, BFZ-FP					
	24 / 1	BFZ-FP-1/24	285650	1	
	24 / 1+	BFZ-FP-1+/24	283061	1	
	24 / 2	BFZ-FP-2/48	283060	1	
	24 / 2+	BFZ-FP-2+/48	283062	1	
	24 / 2++	BFZ-FP-2++/48	283064	1	
	24 / 3+	BFZ-FP-3+/72	283063	1	
	33 / 1	BFZ-FP-1/33	240748	1	
	33 / 1+	BFZ-FP-1+/33	240749	1	
	33 / 2	BFZ-FP-2/66	240750	1	
	33 / 2+	BFZ-FP-2+/66	240751	1	
Front plates 45mm-Device cutout grey, BFZ-FP-G					
	24 / 1	BFZ-FP-1/24-G	116883	1	
	24 / 1+	BFZ-FP-1+/24-G	283066	1	
	24 / 2	BFZ-FP-2/48-G	283065	1	
	24 / 2+	BFZ-FP-2+/48-G	283067	1	
	24 / 2++	BFZ-FP-2++/48-G	283069	1	
	24 / 3+	BFZ-FP-3+/72-G	283068	1	
	33 / 1	BFZ-FP-1/33-G	116884	1	
	33 / 1+	BFZ-FP-1+/33-G	116885	1	
	DIN-rail frame (replacement), BFZ-DINS				
		24 / 2	BFZ-DINS-2/48	283101	1
24 / 3		BFZ-DINS-3/72	283102	1	
24 / 4		BFZ-DINS-4/96	283103	1	
24 / 5		BFZ-DINS-5/120	283104	1	
24 / 6		BFZ-DINS-6/144	283105	1	
33 / 4		BFZ-DINS-4/132	240753	1	
33 / 5		BFZ-DINS-5/165	240754	1	
33 / 6		BFZ-DINS-6/198	240755	1	
Universal mounting plate, BFZ--ITMPL-1+					
	24 / for surface-mounting	BFZ-O-ITMPL-1+/24	285649	1	
	24 / for flush-mounting	BFZ-U-ITMPL-1+/24	285648	1	
	33 / for surface-mounting	BFZ-O-ITMPL-1+/33	240769	1	
	33 / for flush-mounting	BFZ-U-ITMPL-1+/33	240768	1	

Additional Equipment / Spare Parts BF-O..., BF-U...

Accessories


	Description	Type designation	Article No.	Pack (pcs.)
 <p>VT15504</p>	Set for NZM-fitting, BFZ-NZM1-SET			
	24 / white	BFZ-NZM1-SET	285233	1
	24 / grey	BFZ-NZM1-SET-G	285234	1
	33 / white	BFZ-NZM1-SET/33	293628	1
	33 / grey	BFZ-NZM1-SET/33-G	113699	1
	for: MU per rows / Number of rows	Type designation	Article No.	Pack (pcs.)
 <p>VT01205</p>	Separating Plate white, BFZ-SP			
	24	BFZ-SP-24	293621	1
	33	BFZ-SP-33	293622	1
 <p>VT01205</p>	Separating Plate grey, BFZ-SP-G			
	24	BFZ-SP-24-G	113700	1
	33	BFZ-SP-33-G	113701	1
 <p>VT01305</p>	Wire Fixing Rail, BFZ-WFR			
	24	BFZ-WFR-24	293623	1
	33	BFZ-WFR-33	293624	1
 <p>VT01405</p>	Flange Plate blind (Replacement for 2K-Flange), BFZ-FLP-BL			
	white	BFZ-FLP-BL	293625	1
	grey	BFZ-FLP-BL-G	113693	1
 <p>vt23315</p>	Lock set for door			
	Lock set for sheet steeldoor, keyed alike, incl. 2 keys	LOCK-KLV	178930	1
	Rotary door handle Profi-Line (only for BF-O/U-../.-E)	BFZ-LS-PLDH	110165	1
 <p>wa_vt19504</p>	Fastening Set for Cable Duct 60, BFZ-KKW-60			
	• 1 pair additional angles for Cable Duct 60/60 inclusive 2 screws			
		BFZ-KKW-60	285232	1
 <p>VT19305</p>	Earthing set for door, BFZ-DES			
		BFZ-DES	101665	1

Additional Equipment / Spare Parts BF-O..., BF-U...

Accessories

Description	Type designation	Article No.	Pack (pcs.)
Terminal-set N/PE, BFZ-TS-KL			
• max. 63 A			
2x25 mm ² + 9x16 mm ²	BFZ-TS-KL11	293629	1
2x25 mm ² + 13x16 mm ²	BFZ-TS-KL15	293630	1
2x25 mm ² + 27x16 mm ²	BFZ-TS-KL29	293631	1
2x25 mm ² + 43x16 mm ²	BFZ-TS-KL45	293632	1
2x25 mm ² + 58x16 mm ²	BFZ-TS-KL60	293633	1
2x25 mm ² + 74x16 mm ²	BFZ-TS-KL76	293634	1

wa_vt80213

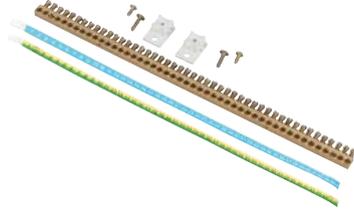

Terminal-set N/PE, BFZ-TS-N/PE-KL

• max. 63 A

2x (2x25 mm ² + 27x16 mm ²)	BFZ-TS-N/PE-KL29	113702	1
2x (2x25 mm ² + 43x16 mm ²)	BFZ-TS-N/PE-KL45	113703	1
2x (2x25 mm ² + 58x16 mm ²)	BFZ-TS-N/PE-KL60	113704	1
2x (2x25 mm ² + 74x16 mm ²)	BFZ-TS-N/PE-KL76	113705	1

Terminal supports, KT

horizontal	KT-3	275445	1
vertical	KT-5	275447	1

VT01705, VT01805



KT-3

KT-5

Terminal blocks, KL

• max. 63 A

1x25 mm ² + 3x16 mm ²	KL-4	219723	1
1x25 mm ² + 6x16 mm ²	KL-7	219724	1
2x25 mm ² + 9x16 mm ²	KL-11	219725	1
2x25 mm ² + 13x16 mm ²	KL-15	219726	1
2x25 mm ² + 23x16 mm ²	KL-25	219727	1
2x25 mm ² + 27x16 mm ²	KL-29	275449	1
2x25 mm ² + 43x16 mm ²	KL-45	275450	1
2x25 mm ² + 58x16 mm ²	KL-60	275451	1
2x25 mm ² + 74x16 mm ²	KL-76	102066	1

vt28015



Additional Equipment / Spare Parts BF-O..., BF-U...

Accessories

	Rated current / Output terminals	Type designation	Article No.	Pack (pcs.)
--	----------------------------------	------------------	-------------	-------------

Terminal blocks 1-pole, BPZ-KB

wa_vt16214, wa_vt16314, wa_vt13214



BPZ-KB-4/80 BPZ-KB-6/160 BPZ-KB-11/250

80 A / 6	BPZ-KB-4/80	289969	1
160 A / 6	BPZ-KB-6/160	289970	1
250 A / 11	BPZ-KB-11/250	289967	1

- Mounting on DIN-Rail or on Mounting Plate
- UL listed
- Save time on wiring
- Save 80% on space used
- Modular construction, 1- to 4-pole systems can be built with several blocks
- Protection class IP20
- Max. operating voltage 1000V AC , 1500V DC

Technical Data

	BPZ-KB-4/80		BPZ-KB-6/160		BPZ-KB-11/250	
		torque (Nm)		torque (Nm)		torque (Nm)
Rated current	80 A		160 A		250 A	
Input terminals	1x2,5-16mm ²	1,5-3	1x10-70mm ²	5-6	1x35-120mm ²	19-21
Output terminals	4x2,5-6mm ²	0,8-1,5	6x2,5-16mm ²	1,5-3	2x6-35mm ²	3,5-7
	2x2,5-16mm ²	1,5-3			5x1,5-16mm ²	2-3
Connection	-		lateral parallel connection possible with Cu 15x5		-	
Abmessungen L x B x H (mm)	66 x 27 x 47		92 x 35 x 49		95,5 x 44,5 x 49	

	Rated current / Input terminals / Output terminals	Type designation	Article No.	Pack (pcs.)
--	--	------------------	-------------	-------------

Terminal blocks 4-pole, BPZ-KB

wa_vt16114, wa_vt14314



BPZ-KB-8/125

BPZ-KB-11/160

125 A / 1x(L1/L2/L3/N) / 7xL1/7xL2/7xL3/10xN	BPZ-KB-8/125	289968	1
160 A / 1x(L1/L2/L3/N) / 11xL1/11xL2/11xL3/11xN	BPZ-KB-11/160	102716	1

- Mounting on DIN-Rail or on Mounting Plate
- Max. operating voltage
BPZ-KB-8/125: 690V AC , 690V DC
BPZ-KB-11/160: 1000V AC , 1500V DC

Technical Data

	BPZ-KB-8/125		BPZ-KB-11/160	
		torque (Nm)		torque (Nm)
Rated current	125 A		160 A	
Input terminals per pole	1x6-35mm ²	1,5	1x10-35mm ²	3,5-5
Output terminals per Phase (L1/L2/L3)	5x1,5-6mm ²	0,8-1,5	3x6-25mm ²	3,5-5
	2x4-16mm ²		8x2,5-16mm ²	
Output terminals N	4x1,5-10mm ²	1,5	3x6-25mm ²	3,5-5
	6x4-16mm ²		8x2,5-16mm ²	

Additional Equipment / Spare Parts BF-O..., BF-U...

Accessories

	Description	Type designation	Article No.	Pack (pcs.)
 	Blanking Strips 45-mm,, NBP			
	white, 1m long	NBP-1000-W	101666	1
	grey, 1m long	NBP-1000	275413	1

 	Mounting plate for Inscription Strip, LAB-BAR			
	for 24MU per row	LAB-BAR_24TE	107901	10
	for 33MU per row	LAB-BAR_33TE	107902	10
	1m	LAB-BAR_1000	107911	10


Enclosure leaves for the Inscription Strips, LAB-TAPE

empty	LAB-TAPE_A4_BLANK	107952	10
-------	-------------------	--------	----

Circuit Diagram Bag, LAB-BAG

 	Size A4	LAB-BAG_A4	107913	1
--	---------	------------	--------	---

Additional Equipment/Spare Parts BF-U(TM)-2S *)

	Description	Type designation	Article No.	Pack (pcs.)
 <p>vt23315</p>	<p>Lock set LOCK-KLV</p> <p>Lock standard keyed alike, incl. rosette, mounting material, 2 keys</p>	LOCK-KLV	178930	1
 <p>vt23215</p>	<p>Rotary bolt lock</p> <p>Rotary bolt lock white</p>	DV-KLV	178943	1
 <p>vt11616</p>	<p>Holder for terminal carrier / Empty terminal carrier (for suitable terminals see chapter Additional Equipment /Spare Parts KLV-...)</p> <p>Holder for combined plug-type terminal KSK, can be used in combination with the empty terminal carrier KSK-KLV or with an equipped terminal carrier, mounting is possible on all sides</p>	BFZ-KTH-KSK	182485	1
 <p>vt119114</p>	<p>Empty terminal carrier suitable for up to 4x KSK-N and/or 4x KSK-PE</p>	KSK-KLV	178905	1/10
 <p>vt11716</p>	<p>Holder for screw-type terminal SK, can be used in combination with the empty terminal carrier SK-KLV or with an equipped terminal carrier, mounting is possible on all sides</p>	BFZ-KTH-SK	182486	1
 <p>vt24515</p>	<p>Empty terminal carrier suitable for up to 27x screw-type terminal points, incl. cover in blue and green</p>	SK-KLV	178910	1
 <p>vt11516</p>	<p>Hollow-wall set</p> <p>Special fastening straps for installation in hollow-walls of min. 10 mm / max. 25 mm wall thickness 4 units in one pouch</p>	BFZ-HWS	182487	1
 <p>vt11416</p>	<p>Cable holders</p> <p>Mounting on the side of the insert, Size 33 x 25 mm, 4 units in one pouch</p>	BFZ-KH	182488	1

*) For accessories of the media distribution board see chapter Additional Equipment/Spare Parts KLV-...

Additional Equipment/Spare Parts EWK-...

Accessories

	Can be used for	Description	Type designation	Article No.	Pack (pcs.)
Wall-fastening straps					
wa_vt31413					
					
EWK-...		Sheet steel, for fixing the enclosures on the wall.	WFB-SET-EW	178507	1
EWS-...		Set includes 4 straps.			
Fixing material for wall-mounting					
vt57315					
					
EWK-...		Set consists of dowels and screws	WFM-SET-EW	178508	1
EWS-...					
Combined plug-type terminal IP2X					
wa_vt32013					
					
EWK-...		1x PE comb. plug-type terminal 6x1.5-16 mm ² + 21x 0.75-4 mm ²	PE-EWK	178513	1
		1x N comb. plug-type terminal 6x1.5-16 mm ² + 21x 0.75-4 mm ²	N-EWK	178514	1
		1x N/N comb. plug-type terminal 6x1.5-16 mm ² + 21x 0.75-4 mm ²	NN-EWK	178515	1
		1x PE/N comb. plug-type terminal 6x1.5-16 mm ² + 21x 0.75-4 mm ²	PEN-EWK	178516	1
Insulation adapter					
vt57015					
					
EWK-...		Plastic support for combined plug-type terminal. For positioning the terminal between the rows.	IRS-EWK	178517	1
Enclosure-connecting set					
wa_vt31913					
					
EWK-...		For connecting wall-mounted enclosures next to or on top of each other	SBS-SET-EWS	178509	1
EWS-...					
Cable insertion flange with adapter					
<ul style="list-style-type: none"> • In addition to the factory-mounted insertion flange • Increase of 48 mm 					
wa_vt31513					
					
EWK-...		22x M25	LP20-EW	178485	1
EWS-...		14x M25/32	LP21-EW	178486	1
EWP-...		6x M32/40/50	LP22-EW	178487	1
		2x M25/32, 1x M32/40, 2x M40/50/60	LP23-EW	178488	1
		Blind	LP24-EW	178489	1
		Sealing membrane	LP25-EW	178490	1
Cable insertion flange with cable grommets KT3/KT4					
vt56915					
					
EWK-...		2x (14-54 mm) Outer diameter of cable	LP-KT3-EW	178497	1
EWS-...					
EWP-...		1x (14-54 mm) Outer diameter of cable	LP-KT4-EW	178498	1

Additional Equipment/Spare Parts EWK-...

Accessories

Can be used for	Description	Type designation	Article No.	Pack (pcs.)
Cable strain relief rail				
EWK-...	For fastening the cables with cable tie wraps	KS-EWK	178501	1

wa_vt31313



Can be used for	Description	Type designation	Article No.	Pack (pcs.)
Cable insertion flange				
<ul style="list-style-type: none"> • To replace the factory-mounted insertion flange • With pre-punched holes for metrical or PG insertions 				
EWK-...	5x M20, 12x M16	LP2-1-EW	178491	1
EWS-...	5x M20, 2x M50	LP2-2-EW	178492	1
EWP-...	1x PG21-48, 2x PG16-29, 4x PG13.5	LP3-EW	178493	1
	17x PG13.5	LP4-EW	178494	1
	Blind	LP5-EW	178495	1
	Elastic insertions	LP6-EW	178496	1

wa_vt31613



Can be used for	Description	Type designation	Article No.	Pack (pcs.)
Sealing plugs				
EWK-...	For closing holes made by mistake	SSCBF-EW	178499	1
EWS-...				
EWP-...				

vt57515



Can be used for	Description	Type designation	Article No.	Pack (pcs.)
Cable interconnect duct				
<ul style="list-style-type: none"> • For interconnecting and covering wires • To be fixed at the top of the enclosure • RAL 9016 				
EWK-...	Width 300	RK03-EW	178502	1
EWS-...	Width 550	RK05-EW	178503	1
	Width 800	RK08-EW	178504	1
	Width 1050	RK10-EW	178505	1

wa_vt31713



Can be used for	Enclosure width [mm]	Enclosure height [mm]	Type designation	Article No.	Pack (pcs.)
Transparent door					
<ul style="list-style-type: none"> • As a modification set, • Without closure, without hinges 					
EWK-...	300	650	TT0306-EW	178520	1
EWS-...	800				
	300	800	TT0308-EW	178521	1
	800				
	300	950	TT0309-EW	178522	1
	800				
	550	500	TT0505-EW	178523	1
	1050				
	1300				
	550	650	TT0506-EW	178524	1
	1050				
	1300				
	550	800	TT0508-EW	178525	1
	1050				
	1300				
	550	950	TT0509-EW	178526	1
	1050				
	1300				

wa_vt05612



Additional Equipment/Spare Parts EWK-...

Accessories

	Can be used for	Description	Type designation	Article No.	Pack (pcs.)
Door locks					
wa_vt31213					
	EWK-... EWS-...	Clip-down handle for Profile semi-cylinder.	SHG-EW	178527	1
wa_vt31113					
	EWK-... EWS-...	T-handle	K-EW	178528	1
wa_vt31013					
	EWK-... EWS-...	Two-way key bit 3 mm	TVD3-EW	178529	1
VT104314					
	EWK-... EWS-...	Standard rotary bolt, Plastic, white	GS-EW	178530	1
Spare parts					
wa_vt09114					
	EWK-...	Quick-acting closure, Plastic cover EWK	SCREW-EWK	178531	1
wa_vt09014					
	EWK-...	Fixing tower, Plastic cover EWK	TOWER-EWK	178510	1
wa_vt05110					
	EWK-... EWS-...	Spare hinges, 1 pair	HINGE-EWKS	178518	1



Energizing a world that demands more.

We deliver:

- **Electrical solutions** that use less energy, improve power reliability and make the places we live and work safer and more comfortable
- **Hydraulic and electrical solutions** that enable machines to deliver more productivity without wasting power
- **Aerospace solutions** that make aircraft lighter, safer and less costly to operate, and help airports operate more efficiently
- **Vehicle drivetrain and powertrain solutions** that deliver more power to cars, trucks and buses, while reducing fuel consumption and emissions

Discover today's Eaton.

Powering business worldwide

As a global power management company, we help customers worldwide manage the power needed for buildings, aircraft, trucks, cars, machinery and businesses.

Eaton's innovative technologies help customers manage electrical, hydraulic and mechanical power more reliably, efficiently, safely and sustainably.

We provide integrated solutions that help make energy, in all its forms, more practical and accessible.

With 2015 sales \$20.9 billion, Eaton has approximately 97,000 employees around the world and sells products in more than 175 countries.

Eaton.com

EATON

Powering Business Worldwide

Eaton is a power management company with 2015 sales of \$20.9 billion. Eaton provides energy-efficient solutions that help our customers effectively manage electrical, hydraulic and mechanical power more efficiently, safely and sustainably.

Eaton has approximately 97,000 employees and sells products to customers in more than 175 countries.

For more information, visit www.eaton.eu.



To contact an Eaton salesperson
or local distributor/agent, please visit
www.eaton.eu/electrical/customersupport